

# Hydrogen alarm for remote hydrogen leak detection

January 14 2020

---




Credit: Tomsk Polytechnic University

Hydrogen is considered as one of the promising alternative energy sources. Nevertheless, its application as an energy carrier is complicated due to its highly explosive nature when mixed with oxygen. These

dangerous situations may arise, for example, in case of hydrogen leaks from the tank where it is stored.

"Therefore, it is necessary to detect hydrogen molecules in a [gas mixture](#). Currently, there are various methods, including [electronic sensors](#), although they are a potential source of spark. In this respect, we turned our attention to [optical fiber](#). This is a simple and commercially available material. In addition, a sensor can be operated remotely, since optical fiber provides rapid and easy information transfer over long distances. The sensor can be installed in the engine of a hydrogen-powered machine or refueling station," Pavel Postnikov, one of the authors and Associate Professor of the TPU Research School of Chemistry & Applied Biomedical Sciences, says.

Optical fiber is a thin filament of optically transparent material, e.g. glass or plastic, capable of transmitting digital information in the form of a light pulse. The researchers modified fibers by removing a fragment of the fiber sheath and applying a fine layer of gold in its place through magnetron sputtering. On the surface of this golden area, the effect of surface plasmon resonance arises. It is the source of the analytical signal. The researchers used this golden area from a matrix solution as a basis for a metal-organic framework consisting of zinc molecules and particular organic compounds.

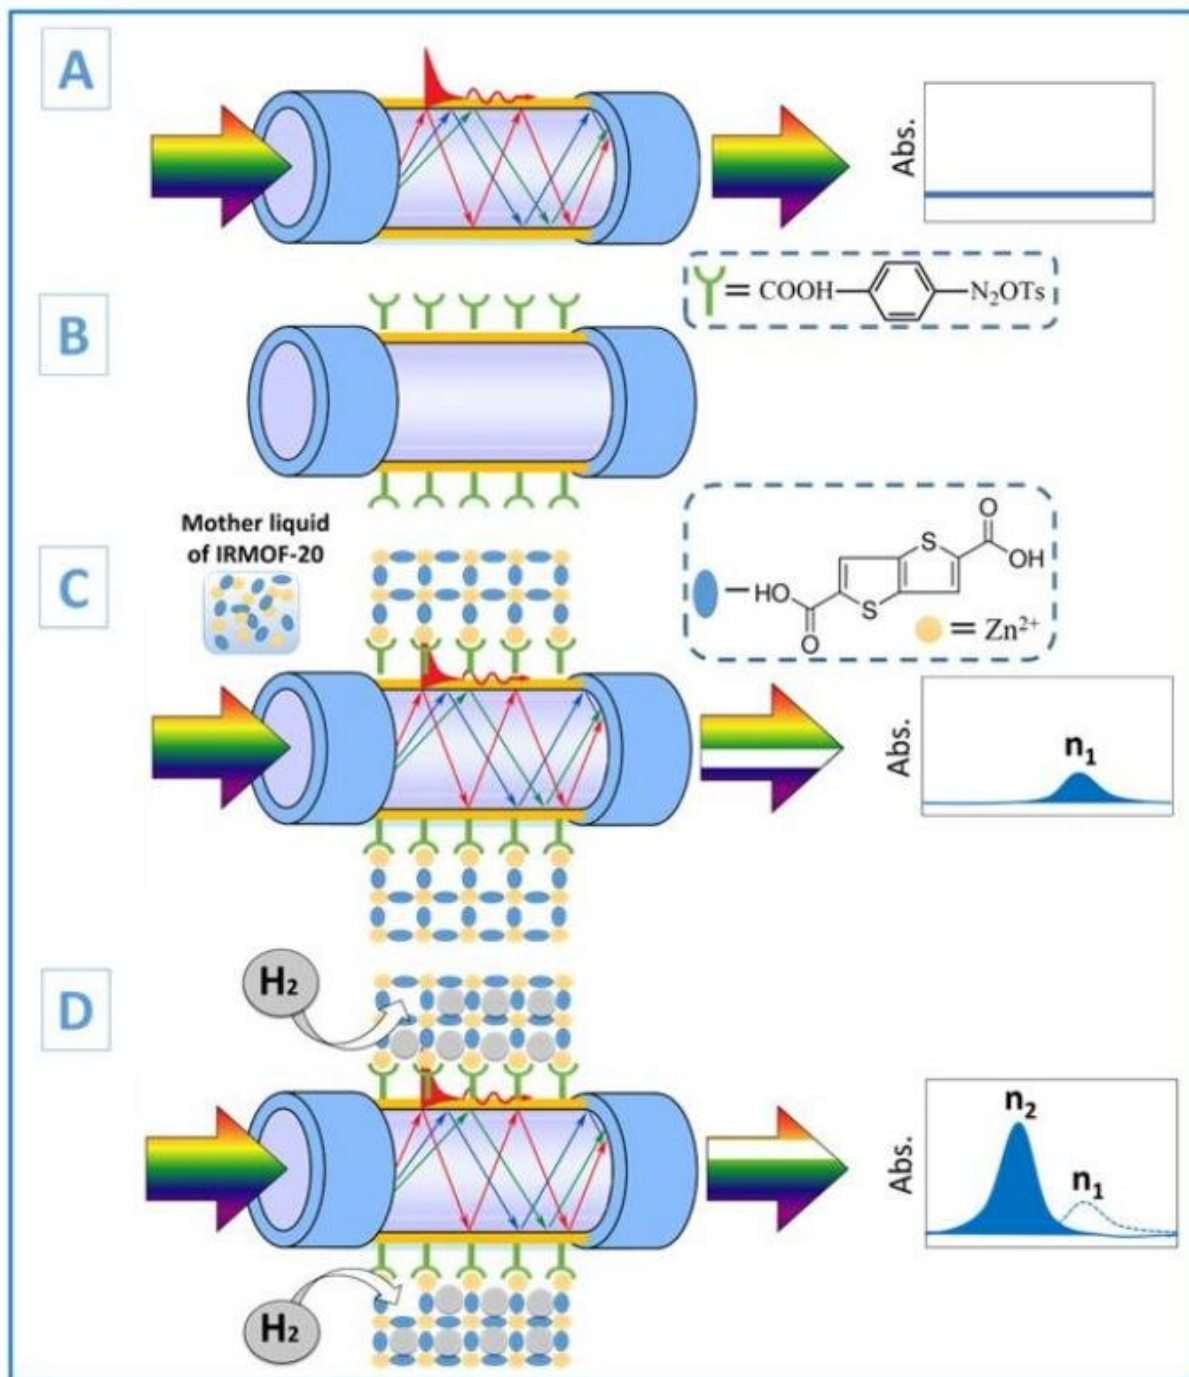

Schematic representation of fabrication and action of present hydrogen sensor design, based on of plasmon-active optical fiber surface decorated with IRMOF-20 film. Credit: Department of Solid State Engineering, University of Chemistry and Technology, 16628 Prague, Czech Republic Research School of Chemistry and Applied Biomedical Sciences, Tomsk Polytechnic University,

Russian Federation Materials Centre, Faculty of Science J. E. Purkyně  
University, 400 96 Ústí nad Labem, Czech Republic

"This frame is extremely sensitive to hydrogen, since it captures its molecules from the air. Moreover, it is inert to other gases. Such sensors are comparable to a stationary chromatograph that is ten times more expensive and requires qualified personnel. For now, we have managed to achieve sensitivity and detection limit below 2%. In other words, our sensor can detect hydrogen in the air at a concentration below 2%, while the lower explosive threshold of a mixture of hydrogen and oxygen is about 4%," Pavel Postnikov says.

The main advantages of the sensor embrace simplicity, sensitivity, and an option for quick remote diagnostics.

"Another important feature is the sensor resistance to oxidizing gases, for instance, [carbon dioxide](#), and various oxides. It is a problem for the modern [sensors](#) since these gases interfere with the sorption of [hydrogen](#). Our sensor can easily work in the open air full of such gases," the researcher adds.

**More information:** Elena Miliutina et al, Fast and All-Optical Hydrogen Sensor Based on Gold-Coated Optical Fiber Functionalized with Metal–Organic Framework Layer, *ACS Sensors* (2019). [DOI: 10.1021/acssensors.9b01074](https://doi.org/10.1021/acssensors.9b01074)

Provided by Tomsk Polytechnic University

Citation: Hydrogen alarm for remote hydrogen leak detection (2020, January 14) retrieved 27

April 2024 from <https://phys.org/news/2020-01-hydrogen-alarm-remote-leak.html>

This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.