


Cooling mechanism increases solar energy harvesting for self-powered outdoor sensors

July 7 2020

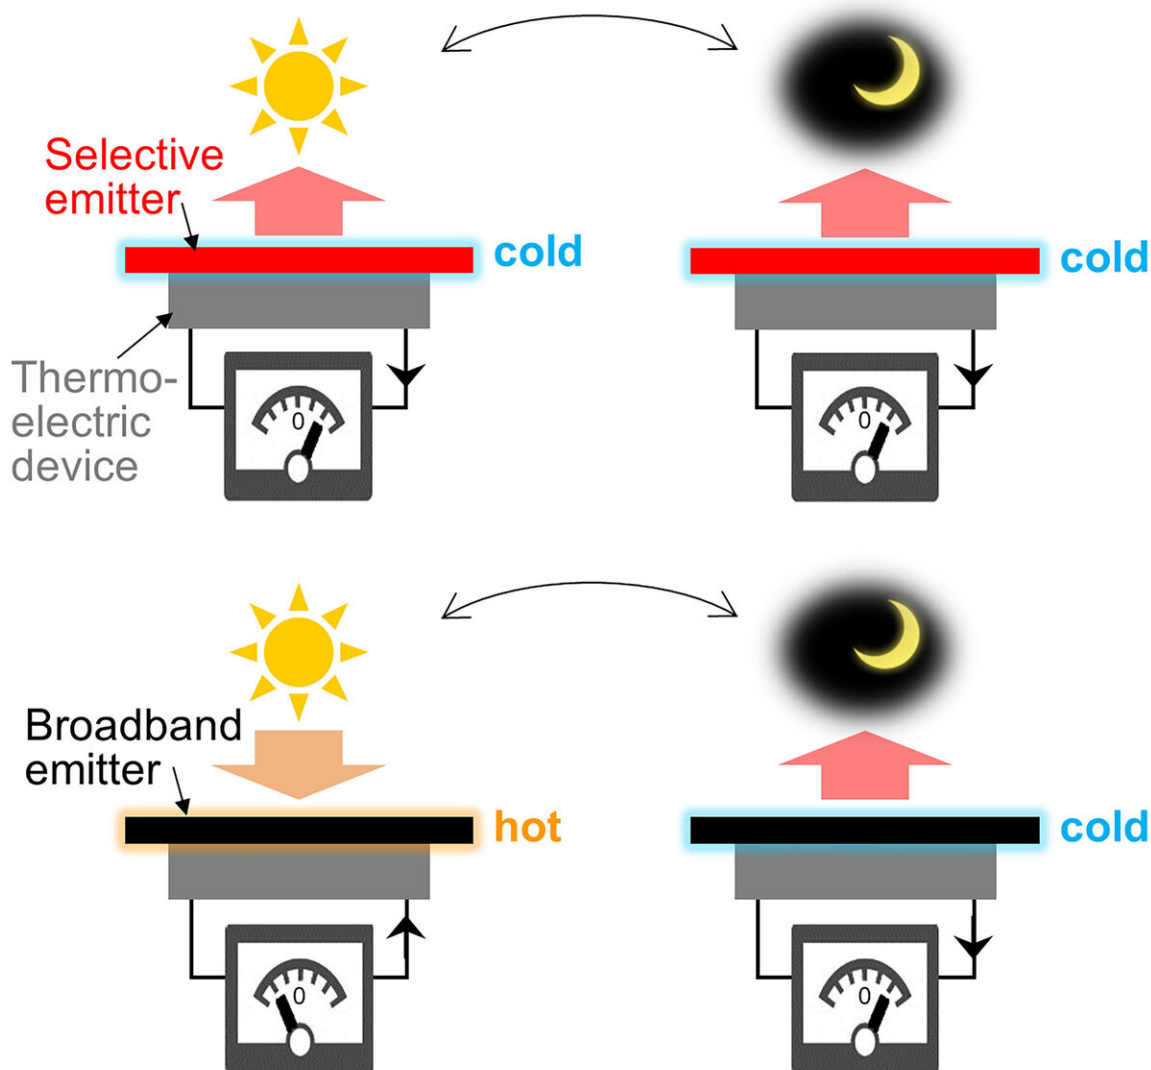

An illustration of thermoelectric devices using a wavelength-selective emitter and a broadband emitter. The device using a broadband emitter experiences a

voltage drop due to environmental temperature changes, while the device with a selective emitter remains constant thanks to daytime radiative cooling. Credit: Satoshi Ishii

Sensors placed in the environment spend long periods of time outdoors through all weather conditions, and they must continuously power themselves in order to collect data. Many, like photovoltaic cells, use the sun to produce electricity, but powering outdoor sensors at night is a challenge.

Thermoelectric devices, which use the [temperature](#) difference between the top and bottom of the device to generate power, offer some promise for harnessing naturally occurring energy. But, despite being more efficient than photovoltaics, many [thermoelectric devices](#) flip the sign of their voltage, meaning the [electrical current](#) changes the direction of its flow, when environmental temperatures change, so the voltage drops to zero at least twice a day.

"The sign of the thermoelectric device depends on the temperature difference between the top and bottom of the device," author Satoshi Ishii said. "Cooling can be used to create a temperature difference compared to the [ambient temperature](#), and if there is a temperature difference, thermoelectric generation is possible."

In a study published this week in *Applied Physics Letters*, the authors tested a thermoelectric device made up of a wavelength-selective emitter that constantly cools the device during the day using radiative cooling, the dispersion of thermal energy from the device into the air. As a result, the top of the device is cooler than the bottom, causing a temperature difference that creates constant voltage through day and night and various [weather conditions](#).

The authors compared a broadband emitter with a selective emitter, showing the selective emitter avoids the problem of the voltage dropping to zero during [environmental changes](#) in temperature.

"For the selective emitter, it is best to have emissivity close to unity in the atmospheric window, approximately 8 to 13 micrometers, where the atmospheric transmittance is high and thermal emission can effectively radiate into space, which in turn cools the device," Ishii said.

The device they tested is comprised of a 100-nanometer-thick aluminum film on the bottom of a glass substrate. The authors discovered that other sources of heat, such as the roof where a sensor might be mounted, can augment its ability to generate voltage.

"A large temperature difference results in a large thermoelectric voltage," Ishii said. "Using the heat on the backside of the device makes the temperature difference between the bottom and top larger, so heat from behind the [device](#) is beneficial for thermoelectric generation."

More information: "Radiative cooling for continuous thermoelectric power generation in day and night," *Applied Physics Letters* (2020). aip.scitation.org/doi/10.1063/5.0010190

Provided by American Institute of Physics

Citation: Cooling mechanism increases solar energy harvesting for self-powered outdoor sensors (2020, July 7) retrieved 26 April 2024 from <https://phys.org/news/2020-07-cooling-mechanism-solar-energy-harvesting.html>

This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.
