


Parallel coupled cell-centered finite volume thermal lattice boltzmann method on unstructured grids

August 12 2020, by Liu Jia

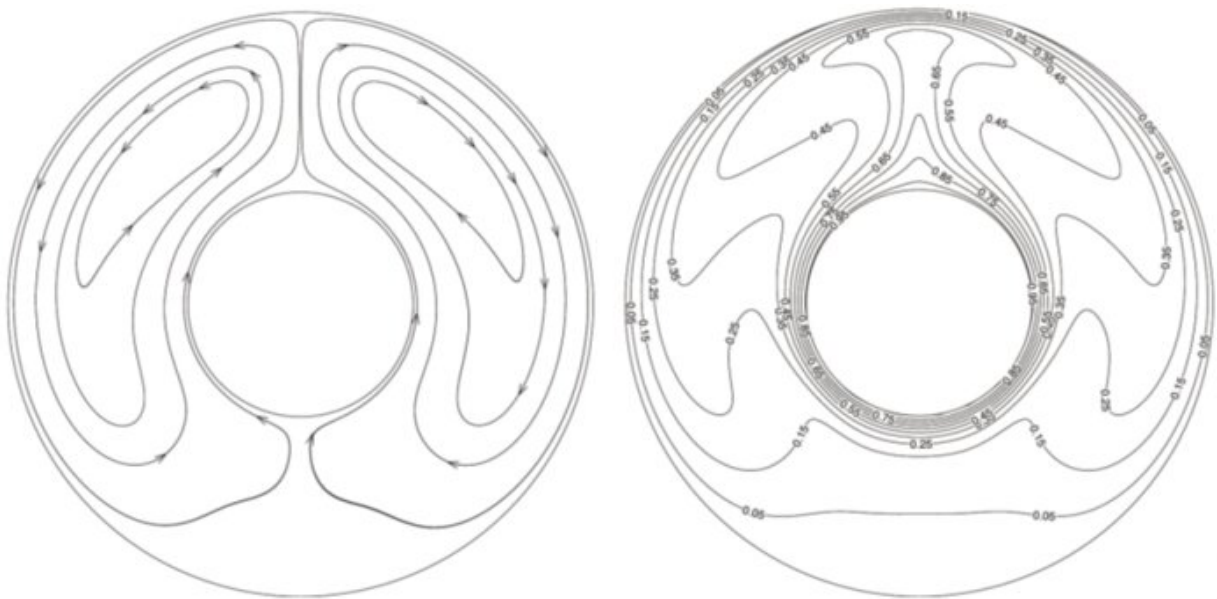

Simulation results of natural convection in a concentric annulus at $Ra=5 \times 10^4$, streamlines (left), temperature contours (right). Credit: SIAT

The lattice Boltzmann method (LBM), which originated from lattice gas automata (LGA), has become an effective and attractive numerical scheme in computational fluid dynamics (CFD).

The conventional LBM couples the grid of the computational domain to

a uniform Cartesian grid and the discrete velocities, having a simple form and achieving second-order accuracy in space. However, the conventional LBM cannot well capture the curved boundaries due to its uniform [grid](#) structure. It has to generate numerous grids to resolve the physical mechanisms.

In a study published in the *International Journal of Heat and Mass Transfer*, scientists from the Shenzhen Institutes of Advanced Technology (SIAT) of the Chinese Academy of Sciences adopted finite volume (FV)-LBM to simulate the thermal incompressible flow on unstructured grids, and proposed a parallel coupled cell-centered FV thermal lattice Boltzmann method, which has the potential to simulate flows in complicated domains.

To simulate thermal flow, a double distribution function (DDF) LBM for thermal flows was employed. In addition to particle distribution functions (PDFs), the model includes temperature distribution functions, which were applied to simulate the temperature field.

The FV method was employed to discretize the DDF temperature LBM (TLBM) with the D2Q9 discrete velocity model and the Bhatnagar-Gross-Krook (BGK) collision model to simulate convective flows on unstructured grids. To simulate a large-scale complex flow field and reduce the computational time, a parallel algorithm for the FV-TLBM on unstructured grids was devised.

The results obtained from FV-TLBM agreed well with previous studies. The performance analysis of parallel numerical experiments showed that the parallel algorithm has considerable scalability and that the efficiency could be as high as 96.79% on 6000 processes.

For the next step, the team will focus on simulating thermal convective flows with complicated boundary.

More information: Lei Xu et al. Scalable parallel finite volume lattice Boltzmann method for thermal incompressible flows on unstructured grids, *International Journal of Heat and Mass Transfer* (2020). [DOI: 10.1016/j.ijheatmasstransfer.2020.120156](https://doi.org/10.1016/j.ijheatmasstransfer.2020.120156)

Provided by Chinese Academy of Sciences

Citation: Parallel coupled cell-centered finite volume thermal lattice boltzmann method on unstructured grids (2020, August 12) retrieved 12 May 2024 from <https://phys.org/news/2020-08-parallel-coupled-cell-centered-finite-volume.html>

This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.