

# Flood risks: More accurate data due to COVID-19

September 23 2020

---



The parking lot at a supermarket in Boston where the measurements were taken.  
Credit: MassDot/NGS/CORS

Emerging use of Global Navigation Satellite System (GNSS) makes it possible to continuously measure shallow changes in elevation of Earth


surface. A study by the University of Bonn now shows that the quality of these measurements may have improved significantly during the pandemic, at least at some stations. The results show which factors should be considered in the future when installing GPS antennas. More precise geodetic data are important for assessing flood risks and for improving earthquake early warning systems. The journal *Geophysical Research Letters* now reports on this.

A number of countries went into politically decreed late hibernation at the onset of the Covid-19 pandemic. Many of those affected by the lockdown suffered negative economic and social consequences. Geodesy, a branch of Earth science to study Earth's gravity field and its shape, on the other hand, has benefited from the drastic reduction in human activity. At least that is what the study now published in *Geophysical Research Letters* shows. The study, which was carried out by geodesists from the University of Bonn, investigated the location of a precise GNSS antenna in Boston (Massachusetts) as an example.

GNSS receivers can determine their positions to an accuracy of a few mm. They do this using the US GPS satellites and their Russian counterparts, GLONASS. For some years now, it has also been possible to measure the distance between the antenna and the ground surface using a new method. "This has recently allowed our research group to measure elevation changes in the uppermost of soil layers, without installing additional equipment," explains Dr. Makan Karegar from the Institute of Geodesy and Geoinformation at the University of Bonn. Researchers, for instance, can measure the wave-like propagation of an earthquake and the rise or fall of a coastal area.

The measuring method is based on the fact that the antenna does not only pick up the direct satellite signal. Part of the signal is reflected by the nearby environment and objects and reaches the GNSS antenna with some delays. This reflected part therefore travels a longer path to the

antenna. When superimposed on the directly received signal, it forms certain patterns called interference. The can be used to calculate the distance between the antenna and the [ground surface](#) which can change over time. To calculate the risk of flooding in low-elevation coastal areas, it is important to know this change—and thus the subsidence of the Earth surface—precisely.

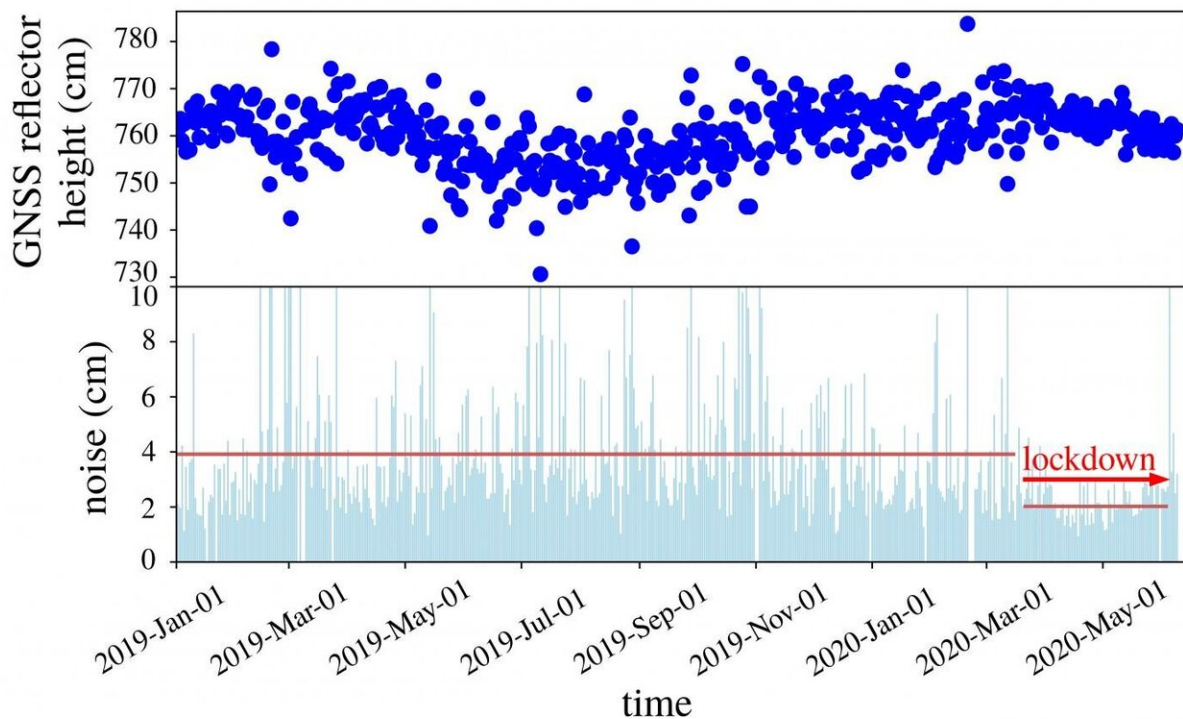

A geodetic GPS sensor obtains more precise measures of antenna height due to absence of cars in the neighboring parking lot during the lockdown. Credit: Makan A. Karegar

This method works well if the surrounding ground is flat, like the surface of a mirror. "But many GNSS receivers are mounted on buildings in cities or in industrial zones," explains Prof. Dr. Jürgen

Kusche. "And they are often surrounded by large parking lots—as is the case with the antenna we investigated in Boston."

## Cars cause disturbance

In their analysis, the researchers were able to show that parked cars significantly reduce the quality of the elevation data: Parked vehicles scatter the satellite signal and cause it to be reflected several times before it reaches the antenna, like a cracked mirror. This not only reduces the signal intensity, but also the information that can be extracted from it: It's "noisy." In addition, because the "pattern" of parked cars changes from day to day, these data can not be easily corrected.

"Before the pandemic, measurements of antenna height had an average accuracy of about four centimeters due to the higher level of noise," says Karegar. "During the lockdown, however, there were almost no vehicles parked in the vicinity of the [antenna](#); this improved the accuracy to about two centimeters." A decisive leap: The more reliable the values, the smaller the elevation fluctuations that can be detected in the upper soil layers.

In the past, GNSS stations were preferably installed in sparsely populated regions, but this has changed in recent years. "Precise GNSS sensors are often installed in [urban areas](#) to support positioning services for engineering and surveying applications, and eventually for scientific applications such as deformation studies and natural hazards assessment," says Karegar. "Our study recommends that we should try to avoid installation of GNSS sensors next to parking lots."

**More information:** Makan A. Karegar et al, Imprints of COVID-19 lockdown on GNSS observations: An initial demonstration using GNSS interferometric reflectometry, *Geophysical Research Letters* (2020). [DOI](#):

[10.1029/2020GL089647](https://doi.org/10.1029/2020GL089647)

Provided by University of Bonn

Citation: Flood risks: More accurate data due to COVID-19 (2020, September 23) retrieved 26 April 2024 from <https://phys.org/news/2020-09-accurate-due-covid-.html>

This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.