


Materials scientists learn how to make liquid crystal shape-shift

September 25 2020

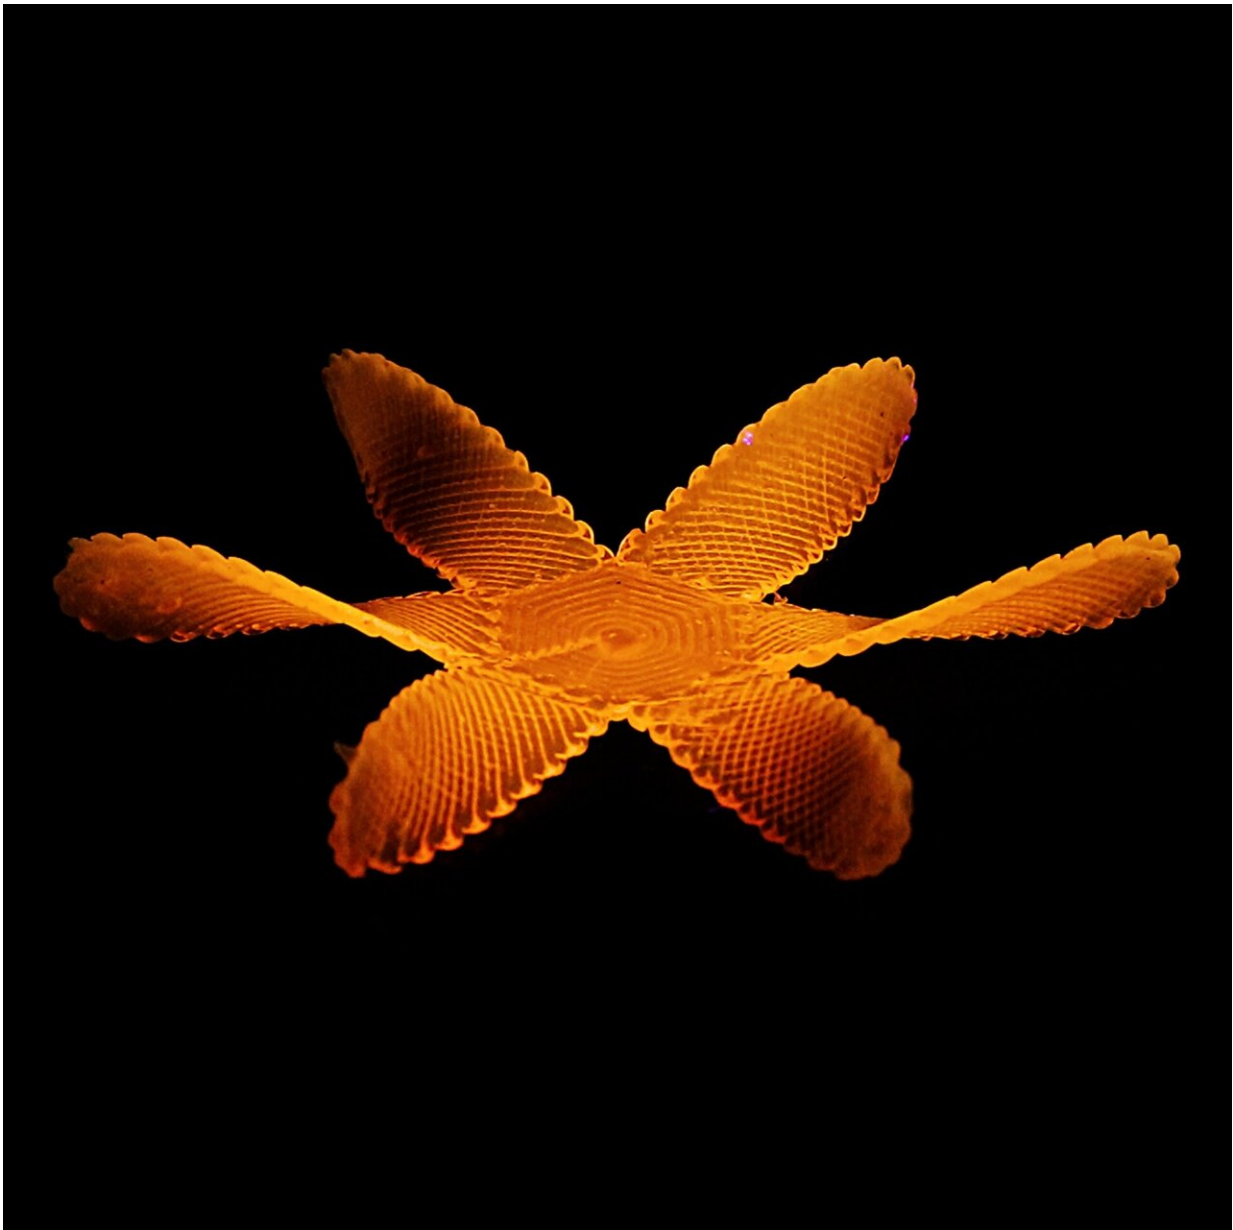

Researchers also 3D-printed structures made of two layers of LCE with different properties and showed that this gave the material even more degrees of freedom to actuate. Researchers also printed lattice structures with the material, which could be used in medical applications. Credit: University of California San Diego

A new 3-D-printing method will make it easier to manufacture and control the shape of soft robots, artificial muscles and wearable devices. Researchers at UC San Diego show that by controlling the printing temperature of liquid crystal elastomer, or LCE, they can control the material's degree of stiffness and ability to contract—also known as degree of actuation. What's more, they are able to change the stiffness of different areas in the same material by exposing it to heat.

As a proof of concept, the researchers 3-D-printed in a single print, with a single ink, structures whose stiffness and actuation varies by orders of magnitude, from zero to 30 percent. For example, one area of the LCE [structure](#) can contract like muscles; and another can be flexible, like tendons. The breakthrough was possible because the team studied LCE closely to better understand its [material properties](#).

The team, led by Shengqiang Cai, a professor in the Department of Mechanical and Aerospace Engineering at the UC San Diego Jacobs School of Engineering, details their work in the Sept. 25 issue of *Science Advances*.

Researchers were inspired to create this material with different degrees of actuation by examples in biology and nature. In addition to the combination of muscle and tendon, researchers took cues from the beak of the squid, which is extremely stiff at the tip but much softer and malleable where it is connected to the mouth of the squid.

"3-D-printing is a great tool to make so many different things—and it's even better now that we can print structures that can contract and stiffen as desired under a certain stimuli, in this case, heat," said Zijun Wang, the paper's first author and a Ph.D. student in Cai's research group.

Understanding material properties

To understand how to tune the material properties of LCE, researchers first studied the material very closely. They determined that printed LCE filament is made of a shell and a core. While the shell cools off quickly after printing, becoming stiffer, the core cools more slowly, remaining more malleable.

As a result, researchers were able to determine how to vary several parameters in the printing process, especially temperature, to tune the mechanical properties of LCE. In a nutshell, the higher the printing temperature, the more flexible and malleable the material. While the preparation of the LCE ink takes a few days, the actual 3-D print can be done in just 1 to 2 hours, depending on the geometry of the structure being printed.

"Based on the relationship between the properties of LCE filament and printing parameters, it's easy to construct structures with graded material properties," said Cai.

Varying temperature to 3-D-printing structures

For example, researchers printed an LCE disk at 40 degrees C (104 F) and heated it up to 90 degrees C (194 F) in hot water. The disk deformed into a conical shape. But an LCE disk composed of areas that are printed at different temperatures (40, then 80 then 120 degrees Celsius, for example), deformed in a completely different shape when

heated up.

Researchers also 3-D-printed structures made of two layers of LCE with different properties and showed that this gave the material even more degrees of freedom to actuate. Researchers also printed lattice structures with the material, which could be used in [medical applications](#).

Finally, as a proof of concept, the team 3-D printed an LCE tube that they had tuned during 3-D printing and showed that it could adhere to a rigid glass plate much longer when actuated at high temperatures, about 94 C (201 F), than a regular LCE tube with homogenous properties. This could lead to the manufacture of better robotic feet and grippers.

The actuation of the material could be activated not just in hot water but also by infusing LCE with heat-sensitive particles or particles that absorb light and convert it to heat—anything from black ink powder to graphene. Another mechanism would be to 3-D print the structures with electric wires that generate heat embedded in LCE.

Next steps include finding a way to tune the material's properties more precisely and efficiently. Researchers also are working on modifying the ink so the printed structures can be self-repairable, reprogrammable, and recyclable.

More information: "Three-dimensional printing of functionally graded liquid crystal elastomer" *Science Advances* (2020).
[advances.sciencemag.org/lookup1126/sciadv.abc0034](https://advances.sciencemag.org/lookup?.../1126/sciadv.abc0034)

Provided by University of California - San Diego

Citation: Materials scientists learn how to make liquid crystal shape-shift (2020, September 25)

retrieved 2 May 2024 from

<https://phys.org/news/2020-09-materials-scientists-liquid-crystal-shape-shift.html>

This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.