


Membranes for capturing carbon dioxide from the air

October 16 2020



Technological solutions for the CO2 emission into the atmosphere should include variety of approaches as there is no one "silver bullet" solution. In this work researchers from I2CNER, Kyushu University and NanoMebrane Technologies Inc. Japan suggest using the gas separation membranes as a tool for direct air capture. When combined with advanced technologies for CO2 conversion the envisaged systems can be widely employed in carbon-recycling sustainable society. Credit: Kyushu University

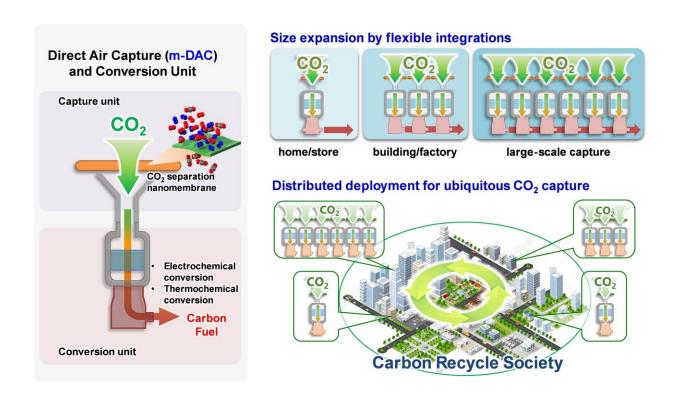

Climate change caused by emissions of greenhouse gases into the atmosphere is a pressing issue for our society. Acceleration of global warming results in catastrophic heatwaves, wildfires, storms and flooding. The anthropogenic nature of climate change necessitates development of novel technological solutions in order to reverse the current CO_2 trajectory.

Direct capture of the <u>carbon dioxide</u> (CO₂) from the air (direct air capture, DAC) is one among a variety of negative emission technologies that are expected to keep global warming below 1.5 °C, as recommended by the Intergovernmental Panel for Climate Change (IPCC). Extensive deployment of the DAC technologies is needed to mitigate and remove so-called legacy carbon or historical emissions. Effective reduction of the CO₂ content in the atmosphere would be achieved only by extracting huge amounts of CO₂ that are comparable to that of the current global emissions. Current DAC technologies are mainly based on sorbent-based systems where CO₂ is trapped in the solution or on the surface of the porous solids covered with the compounds with high CO₂ affinity. These processes are currently rather expensive, although the cost is expected to go down as the technologies developed and deployed at scale.

The ability of membranes to separate carbon dioxide is well documented and its usefulness is established for <u>industrial processes</u>. Unfortunately, its efficiency is less than satisfactory for the practical operation of the DAC.

In a recent paper, researchers from International Institute for Carbo-Neutral Energy Research (I2CNER), Kyushu University and NanoMembrane Technologies Inc. in Japan discussed the potential of membrane-based DAC (m-DAC), by taking advantage of the state-of-the-art performance of organic polymer membranes. Based on the process simulation, they showed the targeted performance for the m-DAC is achievable with competitive energy expenses. It is shown that a



mult-stage application separation process can enable the preconcentration of air CO_2 (0.04%) to 40%.

This possibility and combination of the membranes with advanced CO_2 conversion may lead to realistic means for opening circular CO_2 economy. Based on this finding, Kyushu University team has initiated a Government-supported Moonshot Research and Development Program (Program Manager: Dr. Shigenori Fujikawa). In this program, direct CO_2 capture from the atmosphere by membranes and the subsequent conversiont to valuable materials is the major development target.

More information: Shigenori Fujikawa et al, A new strategy for membrane-based direct air capture, *Polymer Journal* (2020). DOI: 10.1038/s41428-020-00429-z

Provided by Kyushu University

Citation: Membranes for capturing carbon dioxide from the air (2020, October 16) retrieved 30 June 2024 from https://phys.org/news/2020-10-membranes-capturing-carbon-dioxide-air.html

This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.