


# A method for replacing degraded perovskite in solar cells making them recyclable

November 24 2020, by Bob Yirka

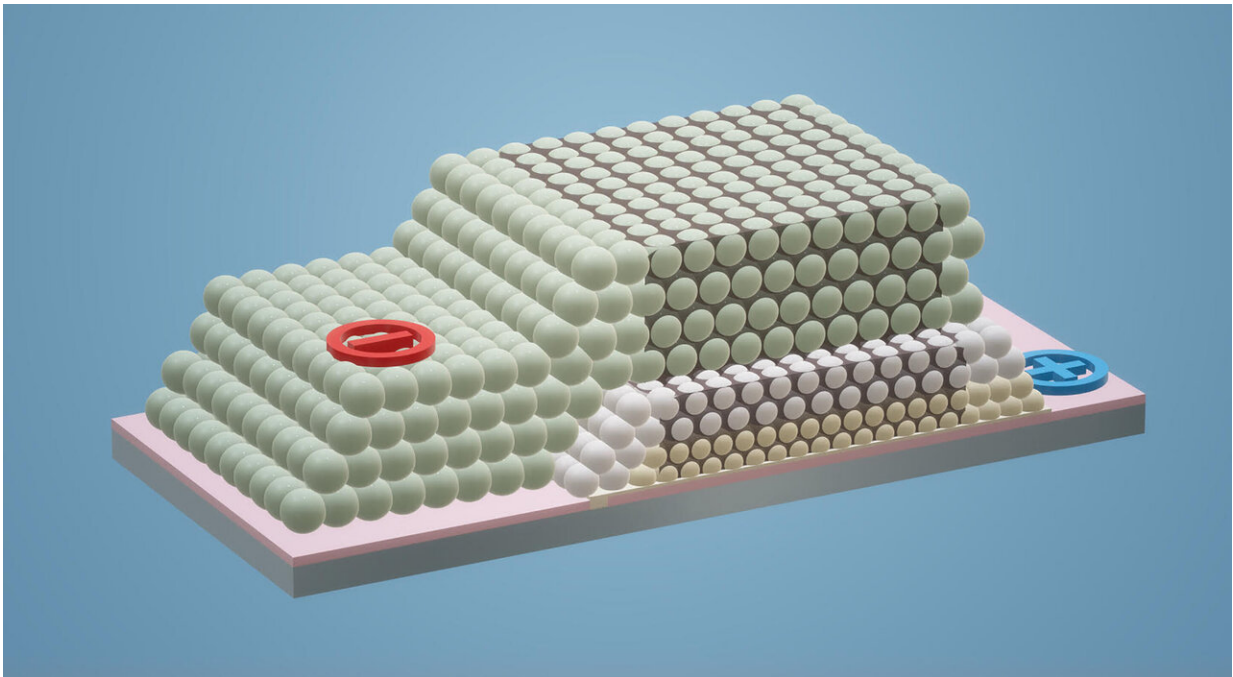


The triple oxide mesoporous indium tin oxide perovskite-based solar cell structure. Credit: Avi Schneider.

A team of researchers at the Hebrew University of Jerusalem has developed a technique for producing recyclable perovskite used in solar cells. In their paper published in *Proceedings of the National Academy of Sciences*, the group describes their technique and the efficiency of the solar cells after they have been recycled.

As much of the world seeks to find greener energy sources, wind, hydro, geothermal and solar have been found to be the most promising. Of these, solar has become the most prominent for widespread small use applications (such as on rooftops). But despite much effort, converting small-scale operations to solar has proven to be difficult due to its cost compared to traditional sources. In recent years, solar has also come under scrutiny due to its less-than-green fabrication attributes—production of [solar cells](#) is "dirty" and they degrade over time, which means they wind up in landfills at some point.

So scientists have been looking for other materials to make them. One of the most promising is perovskite. Unfortunately, [perovskite solar cells](#) degrade, as well, and because of the way they are made, (the degrading perovskite is situated between other material layers) it is difficult to recycle or upgrade them. In this new effort, the researchers have developed a new way to build perovskite-based solar [cells](#) that allows for swapping out the perovskite once it starts to degrade—without losing efficiency.

The new technique by the team involves using screen-printed, three-layered all-nanoparticle networks as rigid frameworks for building cells bases on perovskites. Such frameworks allow the perovskites to percolate in a way that leads to photoactive networks. The final result is a substrate made of porous conductive oxide layers which are separated by an insulator. The design results in a perovskite [layer](#) that is easy to remove and replace.

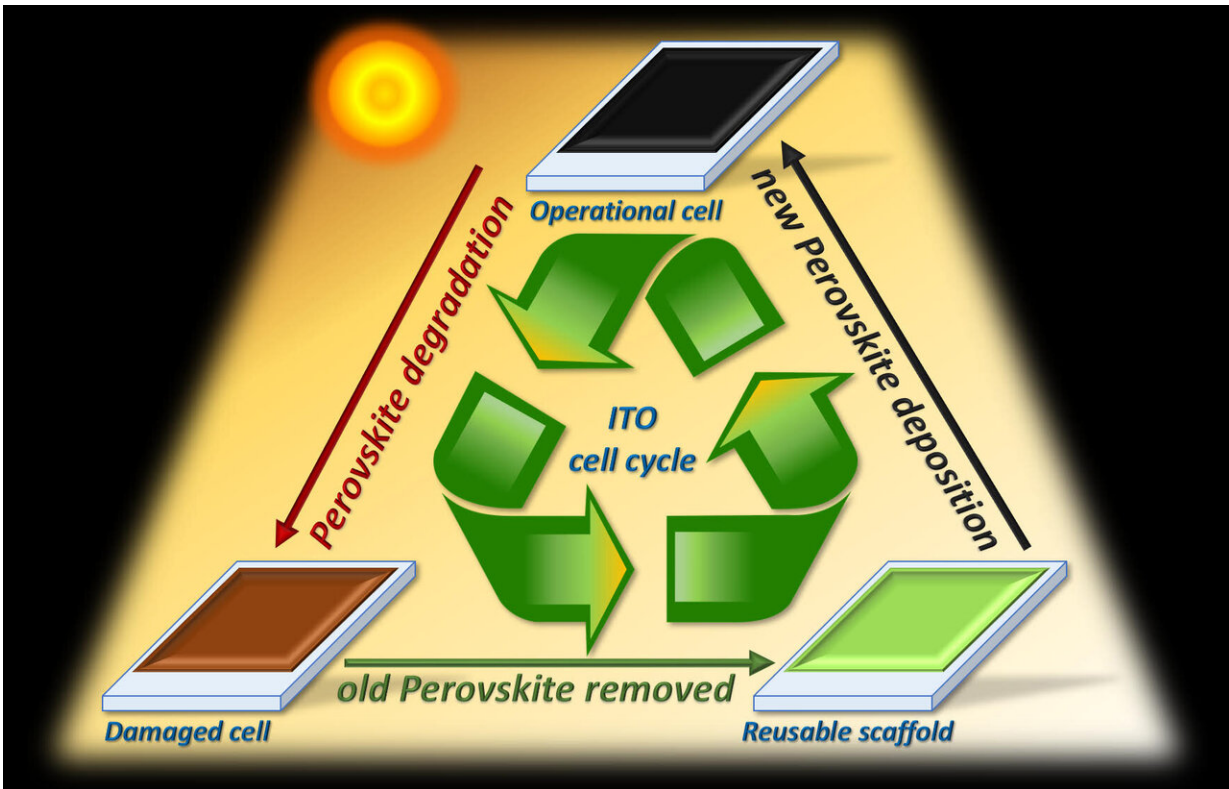

A scheme of the recycle process, which is unique for the mesoporous indium tin oxide perovskite-based solar cell. Credit: Avi Schneider.

Testing of the technique showed it to be equal in efficiency to perovskite cells that do not allow easy recycling. The team also tested their technique by allowing one of the cells to run long enough to degrade and then recycled the [perovskite](#) material—after doing so, the cell was found to be just as efficient as new cells.

**More information:** Avi Schneider et al. Green energy by recoverable triple-oxide mesostructured perovskite photovoltaics, *Proceedings of the National Academy of Sciences* (2020). [DOI: 10.1073/pnas.2013242117](https://doi.org/10.1073/pnas.2013242117)

© 2020 Science X Network

Citation: A method for replacing degraded perovskite in solar cells making them recyclable (2020, November 24) retrieved 13 March 2024 from <https://phys.org/news/2020-11-method-degraded-perovskite-solar-cells.html>

This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.