


Green hydrogen: 'Rust' as a photoanode and its limits

April 19 2021

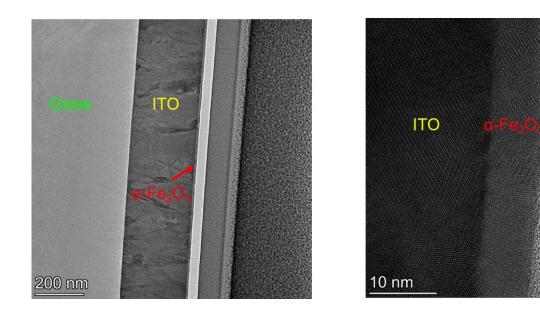

Rust would be an extremely cheap and stable photoelectrode material to produce green hydrogen with light. But the efficiency is limited. The TEM image shows a photoanode containing a thin photoactive layer of rust. Credit: Technion

Hydrogen will be needed in large quantities as an energy carrier and raw material in the energy system of the future. To achieve this, however, hydrogen must be produced in a climate-neutral way, for example through so-called photoelectrolysis, by using sunlight to split water into hydrogen and oxygen. As photoelectrodes, semiconducting materials are needed that convert sunlight into electricity and remain stable in water.



Metal oxides are among the best candidates for stable and inexpensive photoelectrodes. Some of these metal oxides also have catalytically active surfaces that accelerate the formation of hydrogen at the cathode or oxygen at the anode.

Why is rust not much better?

Research has long focused on hematite (α -Fe₂O₃), which is widely known as rust. Hematite is stable in water, extremely inexpensive and well suited as a photoanode with a demonstrated catalytic activity for oxygen evolution. Although research on hematite photoanodes has been going on for about 50 years, the photocurrent conversion efficiency is less than 50% of the theoretical maximum value. By comparison, the photocurrent efficiency of the semiconductor material silicon, which now dominates almost 90% of the photovoltaic market, is about 90% of the theoretical maximum value.

Scientists have puzzled over this for a long time. What exactly has been overlooked? What is the reason that only modest increases in efficiency have been achieved?

Israeli-German team solves the puzzle

In a recent study published in *Nature Materials*, however, a team led by Dr. Daniel Grave (Ben Gurion University), Dr. Dennis Friedrich (HZB) and Prof. Dr. Avner Rothschild (Technion) has provided an explanation as to why hematite falls so far short of the calculated maximum value. The group at Technion investigated how the wavelength of absorbed light in hematite thin films affects the photoelectrochemical properties, while the HZB team determined the wavelength dependent charge carrier properties in thin films of rust with time-resolved microwave measurements.



Fundamental physical property extracted

By combining their results, the researchers succeeded in extracting a fundamental physical property of the material that had generally been neglected when considering inorganic solar absorbers: The photogeneration yield spectrum. "Roughly speaking, this means that only part of the energy of the light absorbed by hematite generates mobile charge carriers, the rest generates rather localized excited states and is thus lost," Grave explains.

Rust will not get much better

"This new approach provides experimental insight into <u>light-matter</u> interaction in hematite and allows distinguishing its optical absorption spectrum into productive absorption and non-productive absorption," Rothschild explains. "We could show that the effective upper limit for the conversion efficiency of hematite photoanodes is significantly lower than that expected based on above band-gap absorption," says Grave. According to the new calculation, today's "champion" hematite photoanodes have already come quite close to the theoretically possible maximum. So it doesn't get much better than that.

Assessing new photoelectrode materials

The approach has also been successfully applied to TiO_2 , a model material, and $BiVO_4$, which is currently the best-performing metal oxide photoanode material. "With this new approach, we have added a powerful tool to our arsenal that enables us to identify the realizable potential of photoelectrode materials. Implementing this to novel materials will hopefully expedite the discovery and development of the ideal photoelectrode for solar water splitting. It would also allow us to 'fail quickly', which is arguably just as important when developing new



absorber materials," says Friedrich.

More information: Grave, D.A., Ellis, D.S., Piekner, Y. et al. Extraction of mobile charge carrier photogeneration yield spectrum of ultrathin-film metal oxide photoanodes for solar water splitting. *Nat. Mater.* (2021). doi.org/10.1038/s41563-021-00955-y

Provided by Helmholtz-Zentrum Berlin für Materialien und Energie

Citation: Green hydrogen: 'Rust' as a photoanode and its limits (2021, April 19) retrieved 5 May 2024 from <u>https://phys.org/news/2021-04-green-hydrogen-rust-photoanode-limits.html</u>

This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.