
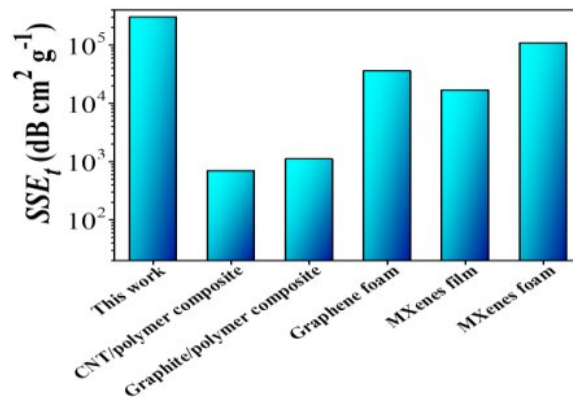


Effective EMI shielding behavior of thin graphene/PMMA nanolaminates

August 4 2021

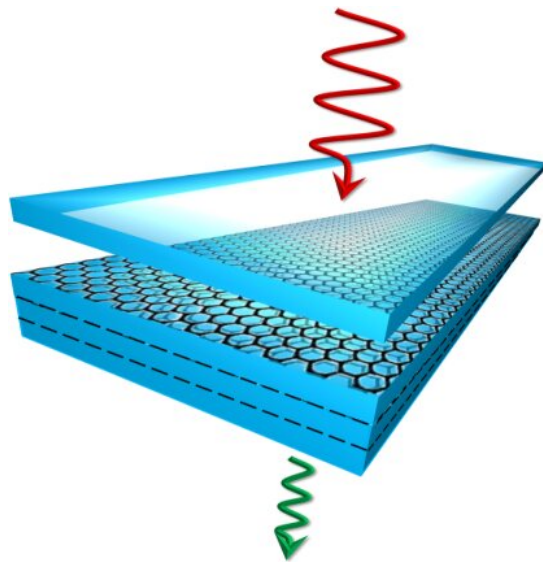

Sketch of the CVD graphene/polymer nanolaminates for EMI shielding. Credit: Foundation for Research and Technology - Hellas

Since its isolation in 2004 by Geim and Novoselov from the University of Manchester (Nobel Prize in Physics in 2010), graphene has been termed a 'wonder material' due to its exceptional properties, which have already been exploited in many applications and products. However, the use of graphene in the form of tiny flakes in polymer composites limits the full exploitation of its excellent properties, requiring high filler loadings for achieving satisfactory electrical and mechanical properties.

A team of researchers led by Professor Costas Galiotis had the innovative idea to use centimeter-size graphene sheets as reinforcement in polymer composites with a nanolaminate architecture. This has been demonstrated to be a smart strategy to overcome the typical drawbacks of nanoparticle fillers, thanks to the large lateral size, which ensures efficient stress transfer and uniform and controllable dispersion through the alternation of the polymer and graphene layers. Large-size monolayer graphene was produced by the technique of chemical vapor deposition (CVD): it produces a monoatomic thickness and, unlike small flakes, there are no size limitations in the other dimensions (length and width).

The centimeter-scale CVD graphene/[polymer](#) nanolaminates were then produced with a semi-automatic process that allows for the manipulation of ultra-thin film, and have been found to outperform, for the same graphene content, state-of-the-art flake-based graphene [polymer composites](#) in terms of mechanical reinforcement and [electrical properties](#). Most importantly, these thin laminate materials show a very high electromagnetic interference (EMI) shielding effectiveness in the Terahertz range, reaching 60 dB for a small thickness of 33 μm , and an absolute EMI shielding effectiveness per unit weight and thickness which is amongst the highest values for synthetic, non-metallic materials produced to date.

Prof. Galiotis says that "in this paper, we have tried to exploit the excellent mechanical and electrical properties of monolayer graphene when used as a reinforcement of engineering polymers. So far, by the use of short graphene flakes, this was not possible, due to the small size of the inclusions. Recent developments in the production of continuous (large size) monolayer graphene membranes allowed us to fabricate nanolaminates that incorporated tens and even hundreds of graphene layers embedded into commercial polymers. This has led to graphene nanolaminates with stiffnesses approaching those of perfect [graphene](#)

per volume fraction and effective EMI shielding performance. This work paves the way for the development of nanolaminates with exceptional properties for aerospace, automotive but also a number of electronic applications."

The research work was published in *Nature Communications*.

More information: Christos Pavlou et al, Effective EMI shielding behaviour of thin graphene/PMMA nanolaminates in the THz range, *Nature Communications* (2021). [DOI: 10.1038/s41467-021-24970-4](https://doi.org/10.1038/s41467-021-24970-4)

Provided by Foundation for Research and Technology - Hellas

Citation: Effective EMI shielding behavior of thin graphene/PMMA nanolaminates (2021, August 4) retrieved 3 May 2024 from <https://phys.org/news/2021-08-effective-emi-shielding-behavior-thin.html>

This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.