


Fast flows prevent buildup of impurities on the edge of tokamak plasmas

October 15 2021

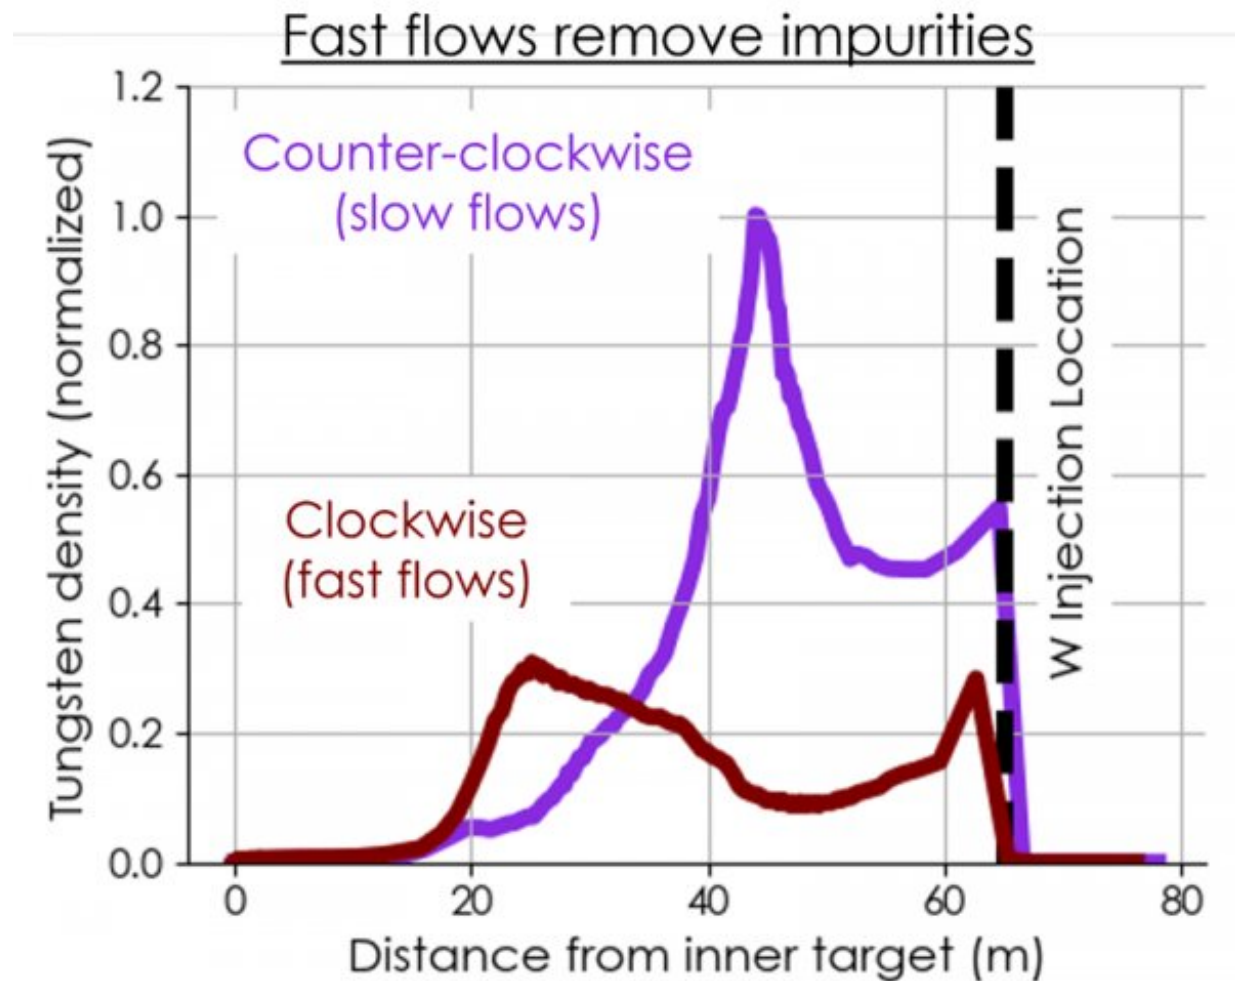

Simulation results showing tungsten density at the interface of the plasma's edge and core for both magnetic field directions. Fast flows that often occur in the clockwise magnetic field direction reduce the accumulation of tungsten impurities. Credit: Shawn Zamperini, UT-Knoxville.

Impurities in the plasmas in fusion tokamaks can reduce performance. These impurities are created by interactions between the hot plasma and the metal tokamak walls. These walls are often armored with tungsten. This material resists heat, but degrades over time, releasing impurities into the plasma. Simulations predict how these impurities behave, but they are difficult to measure directly because many impurities only emit weak levels of radiation. The experiment detailed here used a collector probe to sample the plasma. It determined that detrimental impurities accumulate in the region just outside the plasma edge only when the tokamak magnetic fields rotate around the donut-shaped tokamak in a counter-clockwise direction. This is the opposite direction that the plasma current moves. Clockwise rotation causes fast flows that remove the impurities.

Fusion power plants need plasmas that can maintain fusion conditions for long periods of time. Impurities in the [plasma](#) degrade performance. This means fusion science and technology researchers need to develop ways to control the transport of impurities through the plasma and remove them when they occur. This is important for practical [fusion](#) energy. Until now, there have been no experimental measurements of impurity accumulation in the important space between the tokamak's metal wall and the edge of the plasma. This new research result suggests approaches that future power plants can use to prevent this accumulation.

In a tokamak, impurities can move through the edge of the plasma and enter the plasma's core, contaminating it and reducing power. However, researchers do not fully understand impurity transport along the plasma edge. While simulations have predicted the accumulation of impurities in the plasma edge for decades, researchers have not obtained experimental evidence of this accumulation.

Researchers at the DIII-D National Fusion Facility, in partnership with the University of Tennessee, deployed a diagnostic called a collector probe to measure tungsten content in the edge of plasmas. They used the state-of-the-art edge simulation codes DIVIMP and 3DLIM to model impurity transport in the plasma edge. Simulations showed that in order to reproduce the experimental collector probe measurements, an accumulation must have occurred during the experiments. However, this accumulation only occurred when the [tokamak](#)'s magnetic field moved counter-clockwise. When the [magnetic field](#) moved clockwise, very fast plasma flows likely remove impurities and prevent their accumulation by transporting and depositing them on the vessel walls. These results appear to be the first indirect measurement of edge [impurity](#) accumulation ever made.

The research was published in *Nuclear Materials and Energy*.

More information: S.A. Zamperini et al, Reproduction of collector probe deposition profiles using the far-SOL impurity transport code 3DLIM, *Nuclear Materials and Energy* (2020). [DOI: 10.1016/j.nme.2020.100811](#)

Provided by US Department of Energy

Citation: Fast flows prevent buildup of impurities on the edge of tokamak plasmas (2021, October 15) retrieved 9 April 2024 from <https://phys.org/news/2021-10-fast-buildup-impurities-edge-tokamak.html>

This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.