


Lightweight space robot with precise control developed

December 3 2021

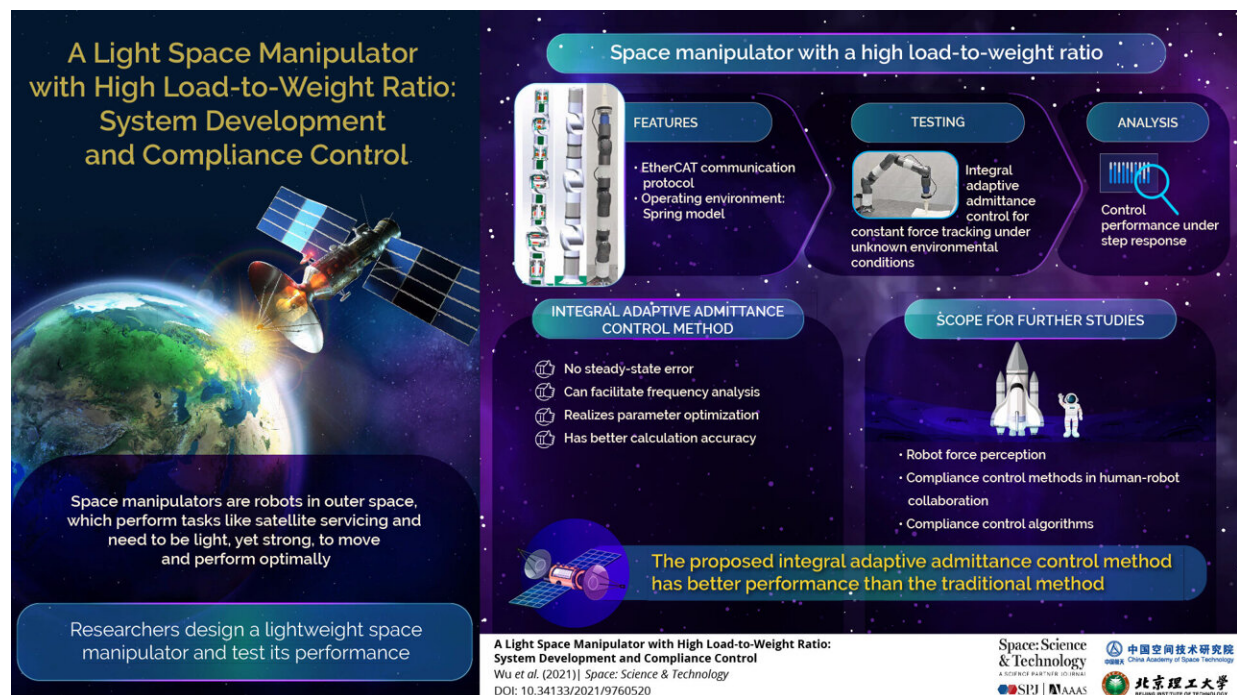

Researchers design a lightweight space manipulator and the proposed integral adaptive admittance control method has better performance than the traditional method. Credit: Space Science & Technology

Robots are already in space. From landers on the moon to rovers on Mars and more, robots are the perfect candidates for space exploration: they can bear extreme environments while consistently repeating the same tasks in exactly the same way without tiring. Like robots on Earth,

they can accomplish both dangerous and mundane jobs, from space walks to polishing a spacecraft's surface. With space missions increasing in number and expanding in scientific scope, requiring more equipment, there's a need for a lightweight robotic arm that can manipulate in environments difficult for humans.

However, the control schemes that can move such arms on Earth, where the planes of operation are flat, do not translate to space, where the environment is unpredictable and changeable. To address this issue, researchers in Harbin Institute of Technology's School of Mechanical Engineering and Automation have developed a robotic arm weighing 9.23 kilograms—about the size of a one-year-old baby—capable of carrying almost a quarter of its own weight, with the ability to adjust its position and speed in real time based on its environment.

They published their results on Sept. 28 in *Space: Science & Technology*.

"In order to solve the problems of strict restrictions on the mass and size of the manipulator, as well as the high requirements for reliability and safety of the control method in space operation, we developed a light space manipulator and proposed a new control method," said corresponding author Wenfu Xu, professor in Harbin Institute of Technology's School of Mechanical Engineering and Automation and State Key Laboratory of Robotics and System.

Such a manipulator needs to exert constant force control when in operation.

"For the constant force control of a plane, the direction of control force is constant, but for a curved surface in an unknown environment, its normal vector is often changed in real time, so the traditional method would fail," Xu said. "In order to overcome this difficulty, we propose integral adaptive admittance control that can realize real-time correction

of the desired position of the end of the manipulator so that it is in full contact and realizes constant force control."

Compare it to a drawing a line on a piece of paper. When the paper is on a flat desktop, it's much easier to maintain even pressure across the line. Drawing an identical line on a sheet of paper wrapped around a bouncing ball is much more difficult and requires specific calculations to understand the movement of the ball and how much pressure to exert based on the position of both the pen and the ball.

To keep the force control of the space manipulator constant, the researchers imposed a control method that removes the need for steady-state correction—a key component of control systems in known environments. Steady-state correction applies the potential error to the full movement, which eases problems when the environment is predictable. For example, if the manipulator knows the desk's surface is rough and strong pressure would cause the paper to rip, it can lighten the pressure of the pen to maintain a constant line. But when the surface is changing and unpredictable, maintaining a constant corrective state results in more errors, since not all corrections apply to all errors.

The researchers tested their control method for the lightweight manipulator and found that, even on an unknown surface, the mechanical arm could adjuster quicker than a traditionally controlled manipulator, resulting in a tracking effect steady enough for practical applications.

"Using the proposed light space [manipulator](#) and the integral adaptive admittance control method can solve practical problems on on-orbit servicing, such as [space](#) target capturing, on-orbital assemble, orbital repairing and so on," Xu said.

According to Xu, this work can serve as a reference for the design of

light manipulators in the future, while the control approach can be applied to the machining process of robotic surface grinders and polishers.

More information: Zhiwei Wu et al, A Light Space Manipulator with High Load-to-Weight Ratio: System Development and Compliance Control, *Space: Science & Technology* (2021). [DOI: 10.34133/2021/9760520](https://doi.org/10.34133/2021/9760520)

Provided by Beijing Institute of Technology

Citation: Lightweight space robot with precise control developed (2021, December 3) retrieved 13 March 2024 from <https://phys.org/news/2021-12-lightweight-space-robot-precise.html>

<p>This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.</p>
--