


Adding one more layer of metal fluoride can enhance performance of solar cells

July 27 2022

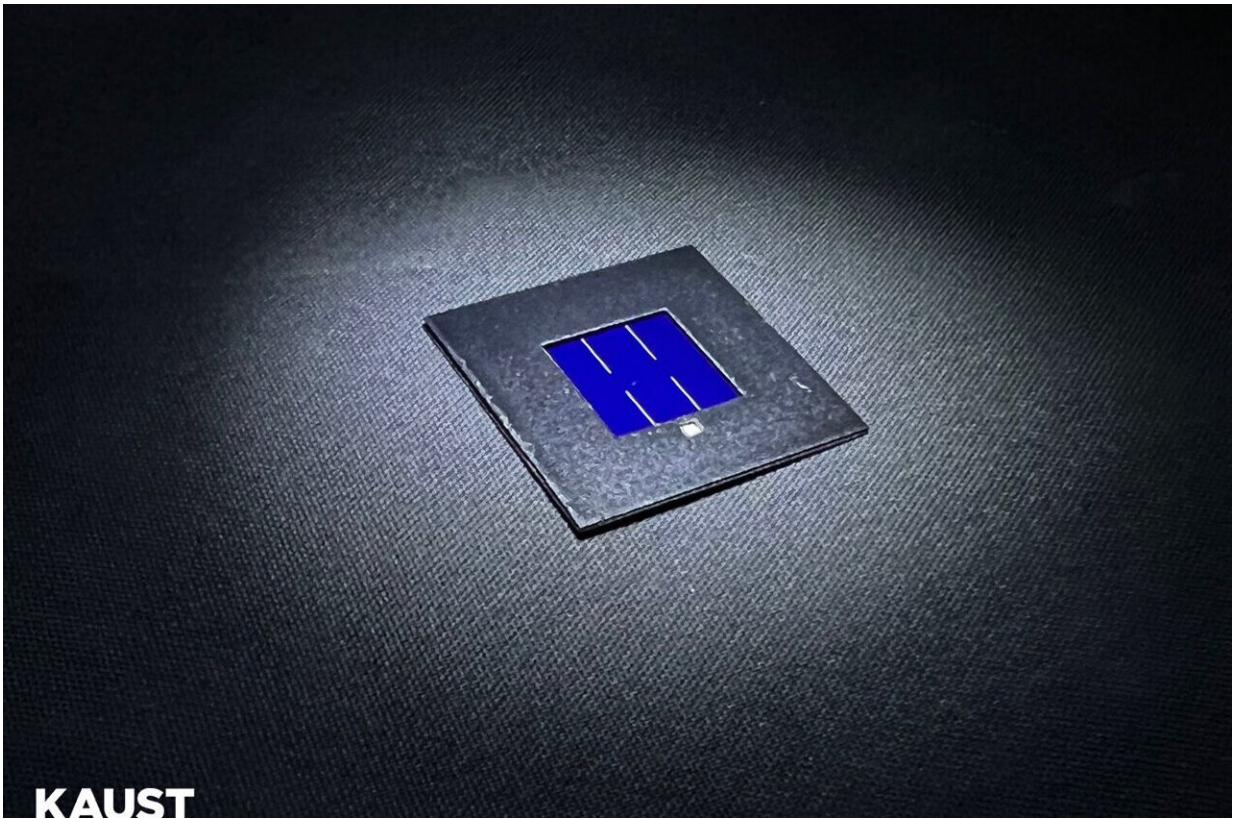

Considerable performance gains in perovskite-silicon tandem solar cells (such as that pictured above) can be achieved by adding a magnesium fluoride interlayer. Credit: 2022 KAUST; Erkan Aydin

Inserting a metal fluoride layer in multilayered perovskite-silicon tandem solar cells can stall charge recombination and enhance performance,

KAUST researchers have found.

Tandem solar cells that combine [perovskite](#) and silicon-based subcells in one device are expected to better capture and convert sunlight into electricity than their conventional single-junction silicon analogs at a lower cost. However, when [sunlight](#) strikes the perovskite subcell, the resulting pairs of electrons and positively charged holes tend to recombine at the interface between perovskite and the electron-transport layer. Also, a mismatch between energy levels at this interface hinders electron separation within the cell. Cumulatively, these problems lower the maximum operating voltage available, or open-circuit voltage, of the tandem cells and limit device performance.

These performance issues can partially be solved by introducing a lithium fluoride layer between the perovskite and electron-transport layer, which usually comprises the electron-acceptor fullerene (C_{60}). However, lithium salts readily liquify and diffuse through surfaces, which makes the devices unstable. "None of the devices have passed the standard test protocols of the International Electrotechnical Commission, prompting us to create an alternative," says lead author Jiang Liu, a postdoc in Stefaan De Wolf's group.

Liu, De Wolf and co-workers systematically investigated the potential of other metal fluorides, such as magnesium fluoride, as interlayer materials at the perovskite/ C_{60} interface of tandem cells. They thermally evaporated the metal fluorides on the perovskite layer to form an ultrathin uniform film with controlled thickness before adding C_{60} and top contact components. The interlayers are also highly transparent and stable, in line with the inverted p-i-n solar cell requirements.

The magnesium fluoride interlayer effectively promoted electron extraction from the perovskite active layer while displacing C_{60} from the perovskite surface. This reduced charge recombination at the interface.

It also enhanced charge transport across the subcell.

The resulting tandem solar cell achieved a 50 millivolt increase in its open-current [voltage](#) and a certified stabilized power conversion efficiency of 29.3 percent—one of the highest efficiencies for perovskite-silicon tandem cells, Liu says.

"Considering that the best efficiency is 26.7 percent for mainstream crystalline silicon-based single-junction cells, this innovative technology could bring considerable performance gains without adding to the cost of fabrication," Liu says.

To further explore the applicability of this technology, the team is developing scalable methods to produce industrial-scale perovskite-silicon tandem cells with areas exceeding 200 square centimeters. "We are also developing several strategies to obtain highly stable tandem devices that will pass the critical industrial stability protocols," Liu says.

More information: Jiang Liu et al, Efficient and stable perovskite-silicon tandem solar cells through contact displacement by MgF_x , *Science* (2022). [DOI: 10.1126/science.abn8910](https://doi.org/10.1126/science.abn8910)

Provided by King Abdullah University of Science and Technology

Citation: Adding one more layer of metal fluoride can enhance performance of solar cells (2022, July 27) retrieved 26 April 2024 from <https://phys.org/news/2022-07-adding-layer-metal-fluoride-solar.html>

This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.