


Chiral sources for metamaterial interface waveguides

July 19 2022

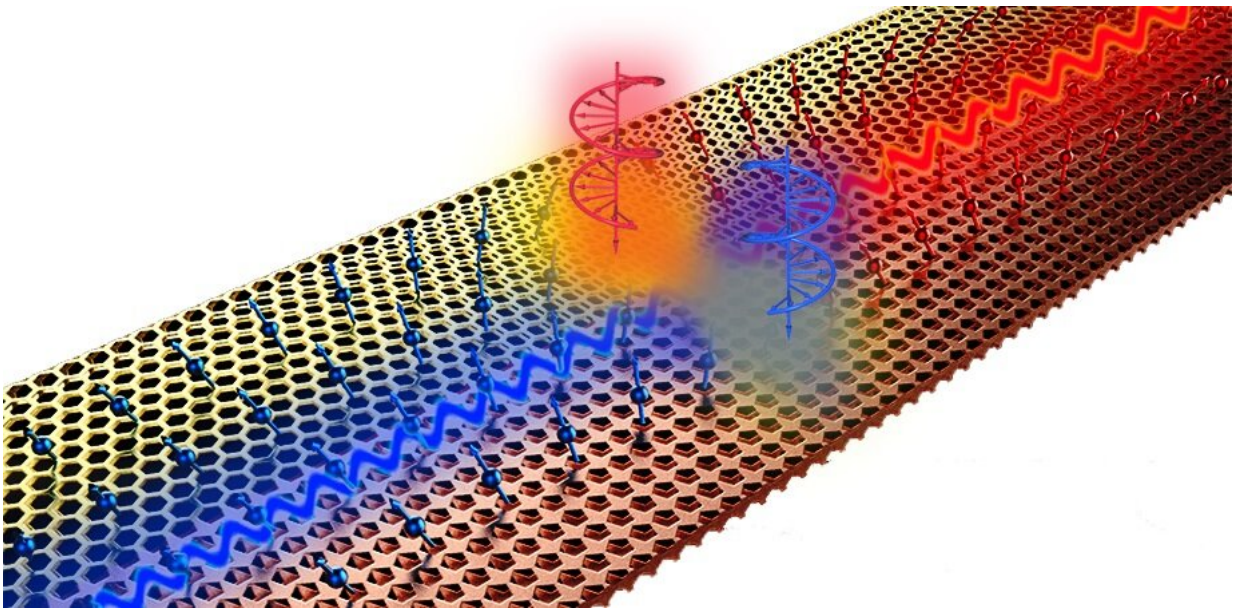


Unidirectional excitation of metamaterial interface waveguides; the chirality of the source decides the direction of energy flow along the edge. Credit: Zhixia Xu

Metamaterial interface waveguides can confine and guide electromagnetic (EM) waves, which has attractive potential in integrated photonics physics and wireless devices, from radio frequencies to optical bands. The energy flow in waveguides can be fully controlled by sorting the near-field light waves according to their handedness (chirality), which determines the direction of energy transmission. Chirality sorting

is an important process to develop in the field of chiral photonics. In the future, chiral-sorting metadevices may be fully digitized and programmable, so that reconfigurable unidirectional transmission routes and scattering performance of the artificial structures can be controlled simultaneously.

To get there, we must better understand the characteristics and possible applications of different edge modes. As reported in *Advanced Photonics*, researchers from Southeast University, Dalian Maritime University, and University of California at San Diego collaborated to visualize various unidirectional edge waves in microwave metamaterial interface waveguides, based on localized sources carrying spin [angular momentum](#) and [orbital angular momentum](#).

In their work, they present a local light beam source, composed of an electric probe array. Their design includes a broadband feeding network to ensure the performance of the angular momentum of the light beams. For their systematic experiments, they established a near-field scanning platform to measure the unidirectional transmission directly. Based on their observations of three edge states—spoof surface plasmon polaritons, line [waves](#), and valley [topological insulators](#)—they assess the advantages and disadvantages of each.

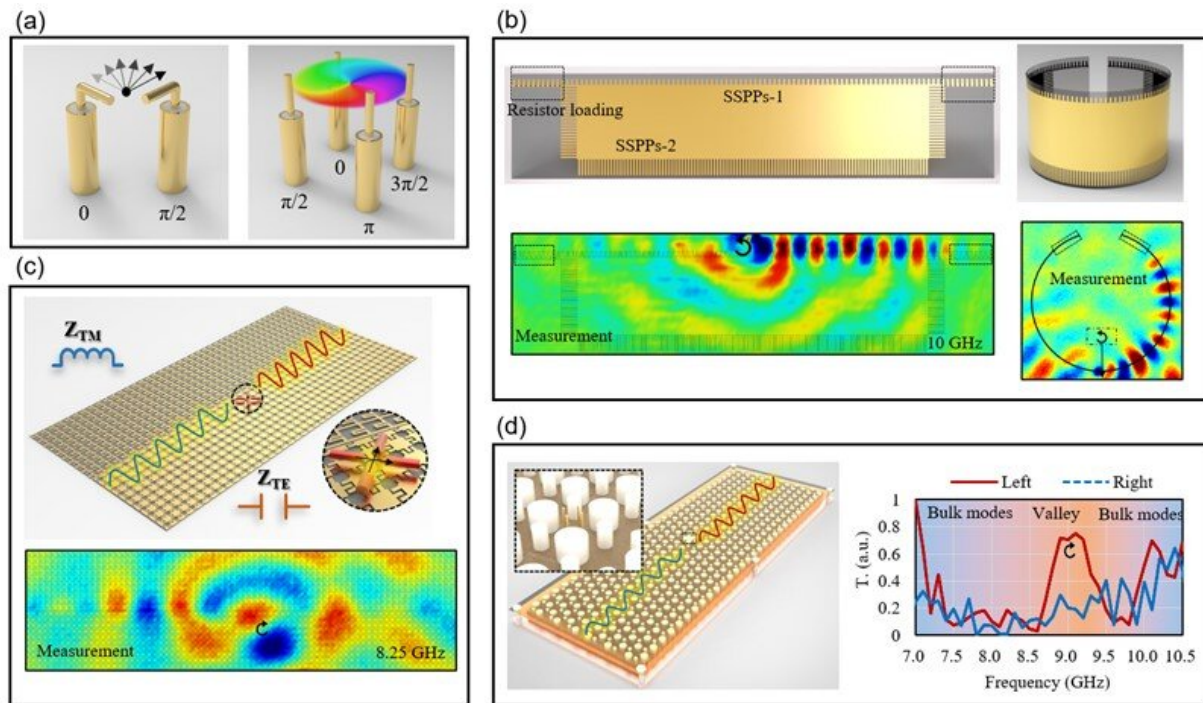

Unidirectional excitation of various metamaterial interface waveguides. (a) Sources with the angular momentum. (b) SSPPs ($\pm\epsilon_{\text{eff}}$). (c) LWs ($\pm Z_{\text{surf}}$). (d) Valley PTIs ($\pm\Phi_{\text{Berry}}$). Credit: Xu et al., DOI: 10.1117/1.AP.4.4.046004

Overall, this research advances the field of chiral photonics science and promotes applications of chiral-sorting technology, particularly for microwave metadevices. According to corresponding author Tie Jun Cui of the State Key Laboratory of Millimeter Waves at Southeast University in Nanjing, "Developing the freedom of microwave angular momentum in the waveguides is meaningful to increase the channel capacity and to design robust and flexible devices. Based on various metamaterial interface waveguides, novel metadevices such as filters, splitters, antennas, and multiplexers can be widely utilized in radar and communication systems."

More information: Zhixia Xu et al, Near-field chiral excitation of

universal spin-momentum locking transport of edge waves in microwave metamaterials, *Advanced Photonics* (2022). [DOI: 10.1117/1.AP.4.4.046004](https://doi.org/10.1117/1.AP.4.4.046004)

Provided by SPIE

Citation: Chiral sources for metamaterial interface waveguides (2022, July 19) retrieved 30 April 2024 from <https://phys.org/news/2022-07-chiral-sources-metamaterial-interface-waveguides.html>

<p>This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.</p>
--