


Assessing the effect of hydraulic fracturing on microearthquakes

August 18 2022, by Robert Lea

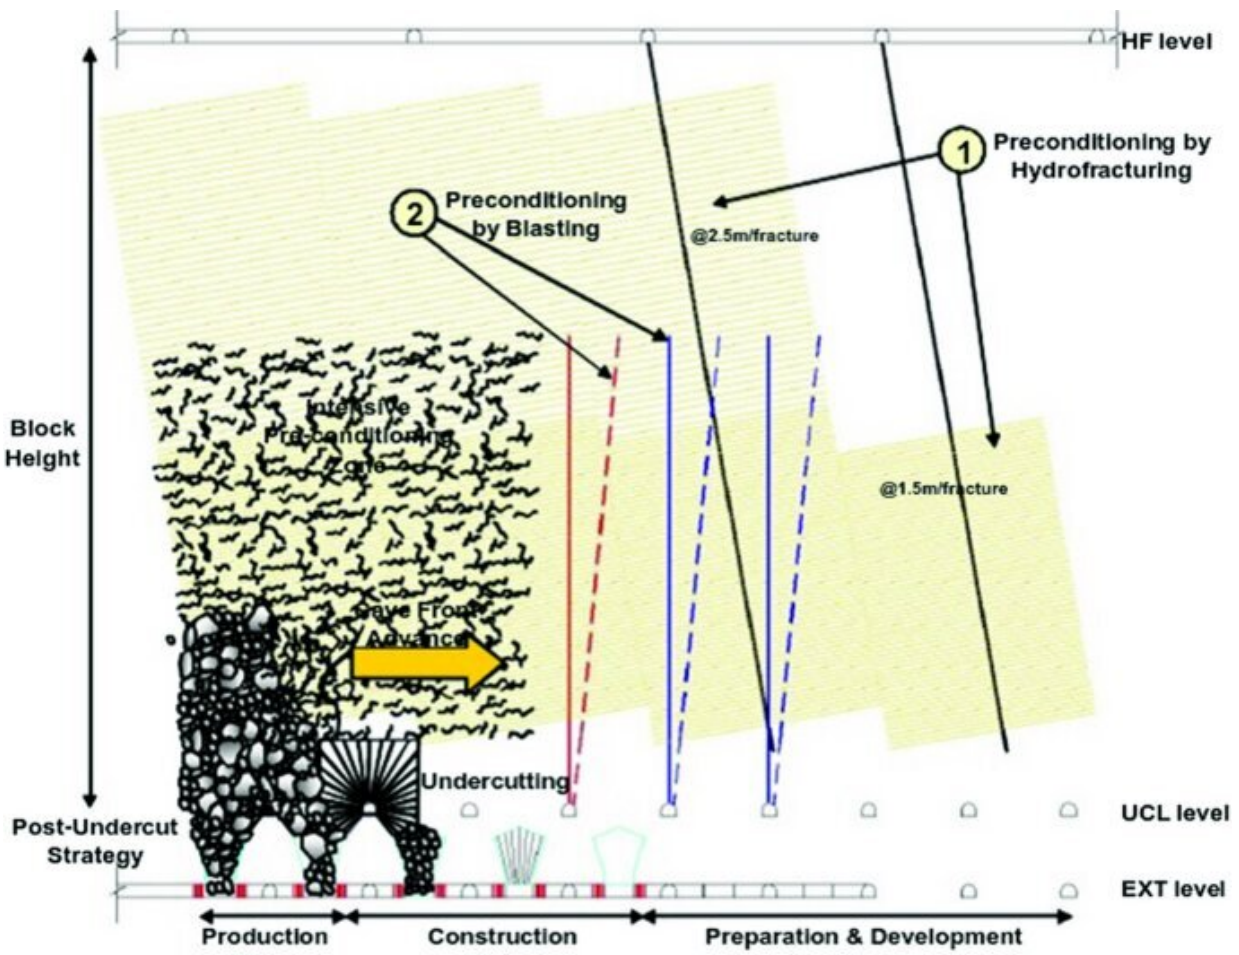

Graphical abstract. Credit: *The European Physical Journal B* (2022). DOI: 10.1140/epjb/s10051-022-00361-6

The analysis of low-intensity human-caused microearthquakes, including their magnitude and frequency, has become an important factor in mining. This is a consideration not only for the safety of mining staff, but also for extraction rates and mine stability that can have major impacts on business performance.

Increasingly, the practice of hydraulic fracturing is used to precondition mines and diminish the magnitude of induced tremors as well as reduce the number of [rock](#) fragments extracted.

A new paper published in *The European Physical Journal B* assesses the impact of hydraulic fracturing on seismic hazards like microearthquakes, an important issue for the safety of workers and the continuation of mining operations. The paper is authored by Erick de la Barra, Pedro Vega-Jorquera and Héctor Torres from the University of La Serena, Chile, alongside Sérgio Luiz E. F. da Silva from Politecnico di Torino, Department of Applied Science and Technology, Turin, Italy.

Hydraulic fracturing involves pumping large quantities of fluids into a wellbore at high pressures. This has the effect of enlarging fractures in the target rock formation. This results in an increase in the yield of oil or gas from rocks — especially from low-permeability rocks like tight sandstone, shale and occasionally coal beds.

The authors attempt to quantify the benefits of preconditioning with hydraulic fracturing by integrating previous investigative models to create a more realistic approximation of the seismic ruptures.

This model was applied to a mine in the O'Higgins Region of Chile to assess induced seismic activity due to the effect of hydraulic fracturing. The team also considered both the magnitude of microearthquakes and the intervening time between events.

This was done by considering 15,436 microearthquakes recorded between 2003 and 2008 in three sections of the mine. These were then compared on the basis of whether the section had been preconditioned with hydraulic fracturing or not.

The results seemed to imply that hydraulic fracturing decreases the [magnitude](#) and the microearthquakes.

The model worked on by the team could also be utilized to predict [seismic activity](#), and to understand so-called marsquakes occurring on the Red Planet.

"In reference to the next step in this investigation, our interest is to work with the problem when self-similarity is broken," Vega-Jorquera says. "Thus, considering the problem of multi-sources and relating them to multimodal distributions, this would imply evaluating possible modifications of the seismic hazard via [hydraulic fracturing](#)."

More information: Erick de la Barra et al, Hydraulic fracturing assessment on seismic hazard by Tsallis statistics, *The European Physical Journal B* (2022). [DOI: 10.1140/epjb/s10051-022-00361-6](https://doi.org/10.1140/epjb/s10051-022-00361-6)

Provided by Springer

Citation: Assessing the effect of hydraulic fracturing on microearthquakes (2022, August 18) retrieved 27 July 2024 from <https://phys.org/news/2022-08-effect-hydraulic-fracturing-microearthquakes.html>

This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.