

# Miniaturized high-performance filter capacitor based on structurally integrated carbon tube grids

August 25 2022

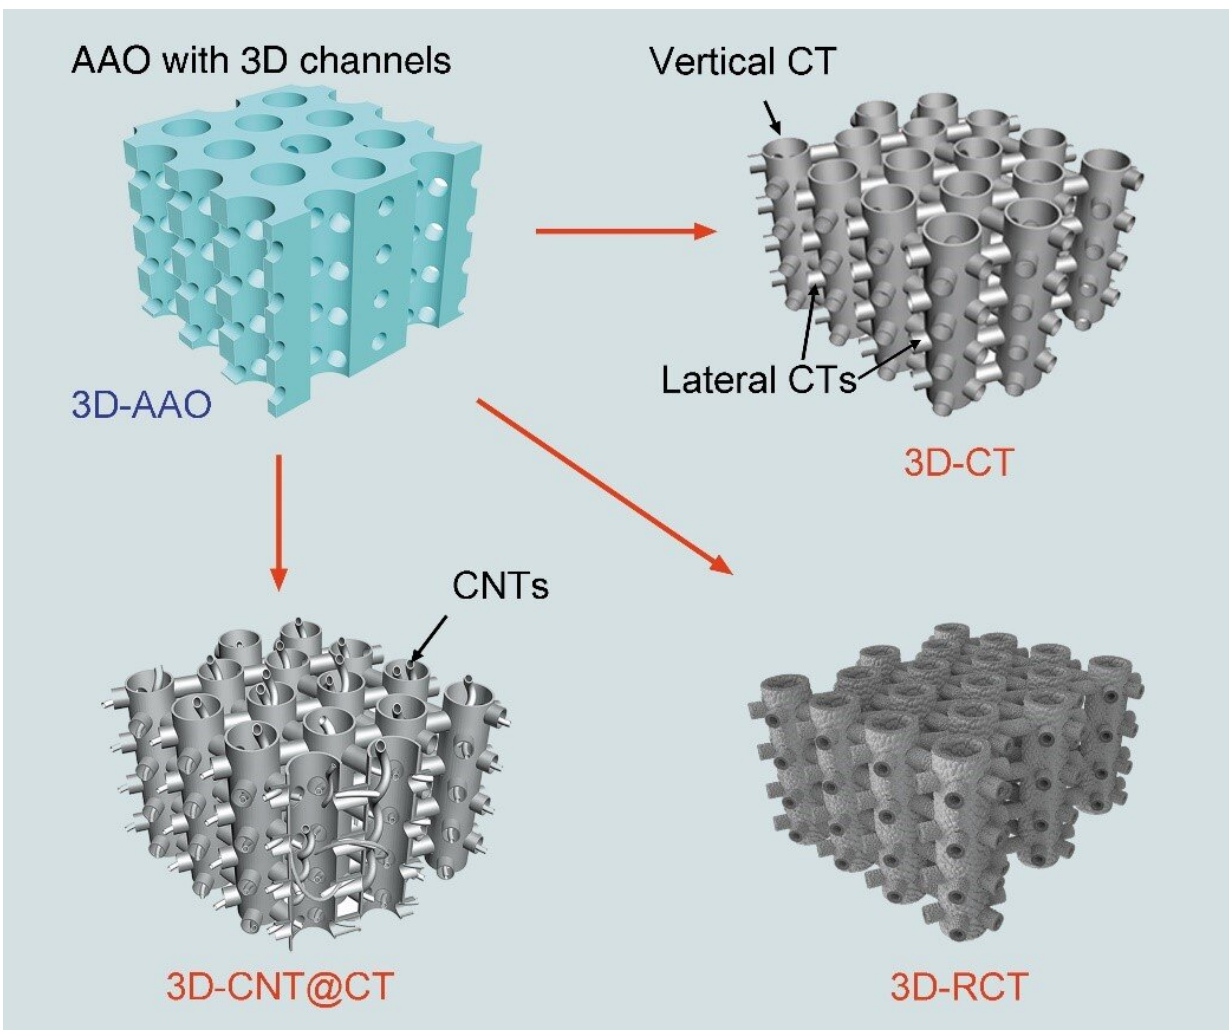


Figure 1. Schematic illustration of the synthesized 3D-CT grids: 3D-CT, 3D-CNT@CT, and 3D-RCT. Credit: HAN Fangming

A research team led by Prof. Meng Guowen from the Institute Solid State Physics, Hefei Institutes of Physical Science (HFIPS) of Chinese Academy of Sciences (CAS), cooperating with Prof. Wei Bingqing of the University of Delaware, Newark, U.S., successfully developed structurally integrated, highly-oriented carbon tube (CT) grids as electrodes of electric double-layer capacitors (EDLCs) to significantly improve in the frequency response performance and the areal and volumetric capacitances at the corresponding frequency. It is expected to be used as a high-performance small-sized alternating current (AC) line-filtering capacitor in electronic circuits, providing the essential materials and technology for the miniaturization and portability of electronic products.

The results were published in *Science* on August 26, 2022.

Converting AC into [direct current](#) (DC) is vital for powering electronics. In the process, filter capacitors play a pivotal role in smoothing the voltage ripple in the rectified DC signal, ensuring the quality and reliability of electrical and electronic equipment. Aluminum electrolytic capacitors (AECs) are widely used in this field. Still, they are always the largest electronic component due to their low volumetric capacitances, which seriously restricts the development of miniaturized and portable electronic products.

EDLCs, usually with carbon materials as electrodes, are considered potential candidates for AC line-filtering to replace AECs due to their higher specific [capacitance](#), in line with the trend of device miniaturization, but restricted by their low operating [frequency](#) (~1 Hz). Although the operating frequency can be enhanced by using highly-oriented carbon nanomaterials as electrodes, the specific capacitance is very limited. Meanwhile, the physical contacts between adjacent carbon

nanotubes or graphene sheets would not only increase the resistance, further slowing the frequency response, but also make it difficult to increase the mass loadings of the carbon nanomaterials and thus obtain a large capacitance. There is an urgent need to develop newly-structured materials to increase the fast frequency response while maintaining high specific capacitance.

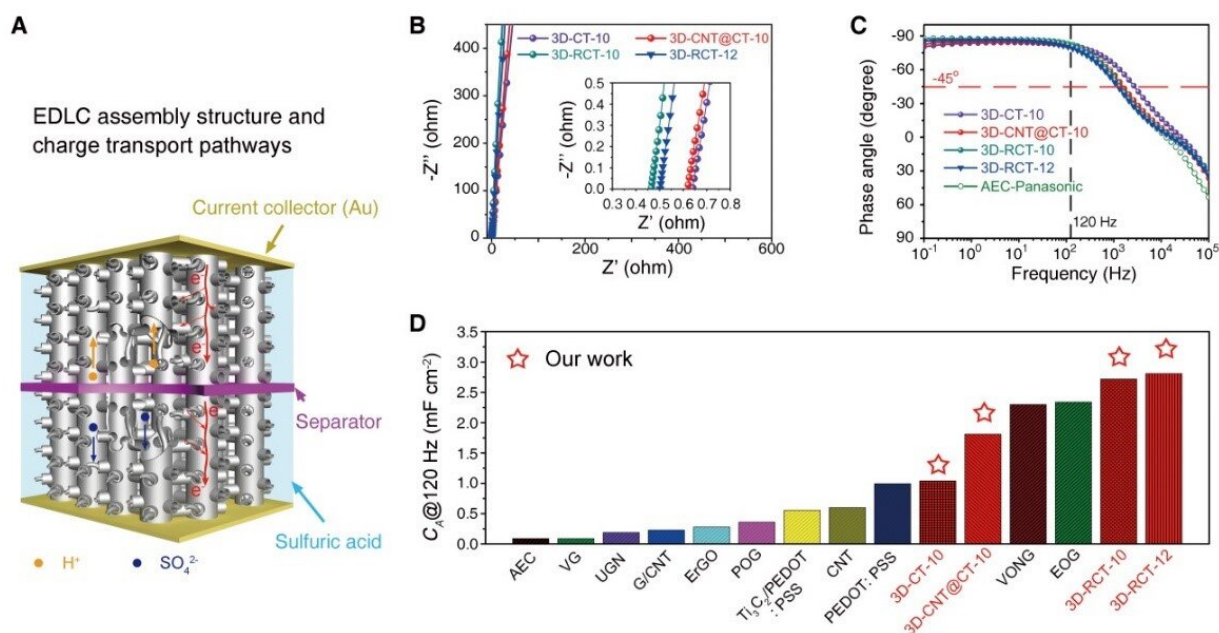


Figure 2. Assembly structure and electrochemical performances of the 3D-CT grid-based EDLCs. (A) Schematic of EDLC assembly structure. (B) Complex plane plot of the 3D-CT based EDLCs. (C) Phase angle versus frequency of 3D-CT-10, 3D-CNT@CT-10, 3D-RCT-10, 3D-RCT-12, and commercial AEC (Panasonic, Japan, 6.3 V/330  $\mu$ F). (D) Comparison of the areal capacitance at 120 Hz of 3D-CT-10, 3D-CNT@C-10, 3D-RCT-10(12), and other reported EDLCs used in the AC filter circuits with the phase angle near or less than -80°. Credit: HAN Fangming

Since 2015, the research team has been working on this topic. After unremitting efforts, a new three-dimensional (3D) structure-integrated and highly-oriented CT array with laterally interconnected CTs by chemical bonds has been successfully developed. The 3D CT grid with truly-interconnected and structurally-integrated vertical and lateral CTs (denoted as 3D-CT) can provide highly oriented, high structural stability, superior electrical conductivity, and effective open porous structure, which is expected to meet the requirements of the electrode materials of the small-sized high-performance AC line-filtering EDLCs.

In order to obtain this unique structure, the researchers firstly anodized an aluminum sheet containing a small amount of Cu impurity, to obtain the highly ordered vertical porous anodic aluminum oxide (AAO) template containing Cu-impurity nanoparticles on the pore walls. Subsequently, a 3D interconnected porous AAO template was obtained by selectively etching the Cu-containing nanoparticles on the pore walls with phosphoric acid.

The 3D-CT grid was synthesized by a chemical vapor deposition (CVD) method using the 3D-AAO template. To increase the specific surface area, and further enhance the specific areal and volumetric capacitance, the 3D-CTs can be modified, as exemplified by filling with much-smaller-diameter carbon nanotubes (CNTs) within the vertical and lateral CTs via the Ni catalyst-assisted CVD method, or surface-treated with  $\text{KMnO}_4$ .

The researchers directly used the 3D-CT grids as the electrodes to construct a series of symmetric EDLCs. It was found that such capacitors have good frequency response performance and very high specific areal capacitance.

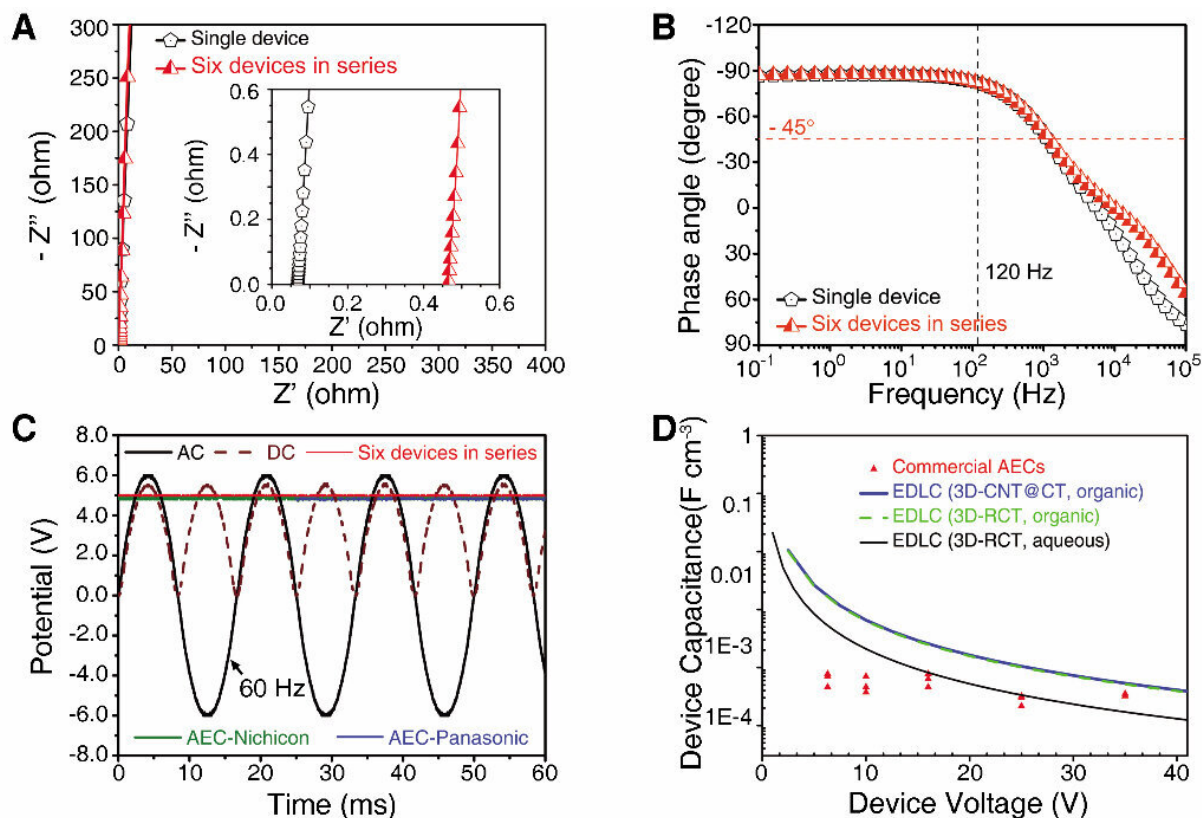


Figure 3. Performance characteristics of single EDLC and EDLCs in series. (A) Nyquist plots. (B) Phase angle vs. frequency. (C) Filtering results of the six EDLCs in series in comparison with AECs. (D) A volumetric comparison of 3D-CT grid-electrode EDLCs with commercial AECs (red triangles, Panasonic, Nichicon, and Nippon, Japan). Credit: HAN Fangming

More importantly, to reach high operating voltage, six 3D-CT grid-based EDLCs were connected in series, which also exhibited an excellent frequency-dependent performance, and a promising filtering performance like a single EDLC. It is largely due to the slight rise of the equivalent series resistance is compromised by a corresponding augmentation in capacitive reactance, ultimately leading to its fast frequency response. This proves that high voltage AC line-filtering capacitors can be achieved by means of connecting multiple EDLCs in



series.

Furthermore, the 3D-CT grid-based EDLCs exhibit significant volumetric advantages over the comparably rated AECs in low-voltage operations (below 25 volts).

The findings provide a sound technological basis and key materials for developing EDLCs for miniaturizing AC line-filter and power devices, which would be helpful to replace the bulky AECs and realizes the miniaturization of portable electronics, mobile power supply, [electrical appliances](#), and distributed energy harvesting and power supply on the Internet of Things, greatly promoting the development of high-performance digital circuits and emerging electronic technologies.

**More information:** Guowen Meng et al, Structurally integrated 3D carbon tube grid-based high-performance filter capacitor, *Science* (2022). [DOI: 10.1126/science.abh4380](https://doi.org/10.1126/science.abh4380).  
[www.science.org/doi/10.1126/science.abh4380](https://www.science.org/doi/10.1126/science.abh4380)

Provided by Chinese Academy of Sciences

Citation: Miniaturized high-performance filter capacitor based on structurally integrated carbon tube grids (2022, August 25) retrieved 15 June 2024 from <https://phys.org/news/2022-08-miniaturized-high-performance-filter-capacitor-based.html>

<p>This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.</p>
--