

A simple, cheap material for carbon capture, perhaps from tailpipes

August 5 2022, by Robert Sanders



Carbon dioxide (depicted in red and white at left) is the main greenhouse gas warming Earth and is emitted in large quantities in the flue gases from industrial and power plants. A new method for removing CO₂ from these flue gases involves piping the emissions through a porous material based on the chemical melamine (center). DETA, a chemical bound inside the porous melamine, grabs CO₂ and removes it from the gas, with nitrogen vented to the atmosphere. Credit: Haiyan Mao and Jeffrey Reimer, UC Berkeley

Using an inexpensive polymer called melamine—the main component of Formica—chemists have created a cheap, easy and energy-efficient way to capture carbon dioxide from smokestacks, a key goal for the United States and other nations as they seek to reduce greenhouse gas emissions.

The process for synthesizing the melamine material, published this week in the journal *Science Advances*, could potentially be scaled down to capture emissions from vehicle exhaust or other movable sources of carbon dioxide. Carbon dioxide from fossil fuel burning makes up about 75% of all [greenhouse gases](#) produced in the U.S.

The [new material](#) is simple to make, requiring primarily off-the-shelf melamine powder—which today costs about \$40 per ton—along with formaldehyde and cyanuric acid, a chemical that, among other uses, is added with chlorine to swimming pools.

"We wanted to think about a [carbon capture](#) material that was derived from sources that were really cheap and easy to get. And so, we decided to start with melamine," said Jeffrey Reimer, Professor of the Graduate School in the Department of Chemical and Biomolecular Engineering at the University of California, Berkeley, and one of the corresponding authors of the paper.

The so-called melamine porous network captures carbon dioxide with an efficiency comparable to early results for another relatively recent material for carbon capture, metal organic frameworks, or MOFs. UC Berkeley chemists created the first such [carbon-capture MOF](#) in 2015, and [subsequent versions](#) have proved even more efficient at removing carbon dioxide from flue gases, such as those from a coal-fired power plant.

But Haiyan Mao, a UC Berkeley postdoctoral fellow who is first author of the paper, said that melamine-based materials use much cheaper ingredients, are easier to make and are more energy efficient than most MOFs. The low cost of porous melamine means that the material could be deployed widely.


"In this study, we focused on cheaper material design for capture and

storage and elucidating the interaction mechanism between CO₂ and the material," Mao said. "This work creates a general industrialization method towards sustainable CO₂ capture using porous networks. We hope we can design a future attachment for capturing car exhaust gas, or maybe an attachment to a building or even a coating on the surface of furniture."

The work is a collaboration among a group at UC Berkeley led by Reimer; a group at Stanford University led by Yi Cui, who is director of the Precourt Institute for Energy, the Somorjai Visiting Miller Professor at UC Berkeley, and a former UC Berkeley postdoctoral fellow; UC Berkeley Professor of the Graduate School Alexander Pines; and a group at Texas A&M University led by Hong-Cai Zhou. Jing Tang, a postdoctoral fellow at Stanford and the Stanford Linear Accelerator Center and a visiting scholar at UC Berkeley, is co-first author with Mao.

Carbon neutrality by 2050

While eliminating fossil fuel burning is essential to halting climate change, a major interim strategy is to capture emissions of carbon dioxide—the main greenhouse gas—and store the gas underground or turn CO₂ into usable products. The U.S. Department of Energy has already announced projects totaling \$3.18 billion to boost advanced and commercially scalable technologies for carbon capture, utilization and sequestration (CCUS) to reach an ambitious flue gas CO₂ capture efficiency target of 90%. The ultimate U.S. goal is net zero carbon emissions by 2050.

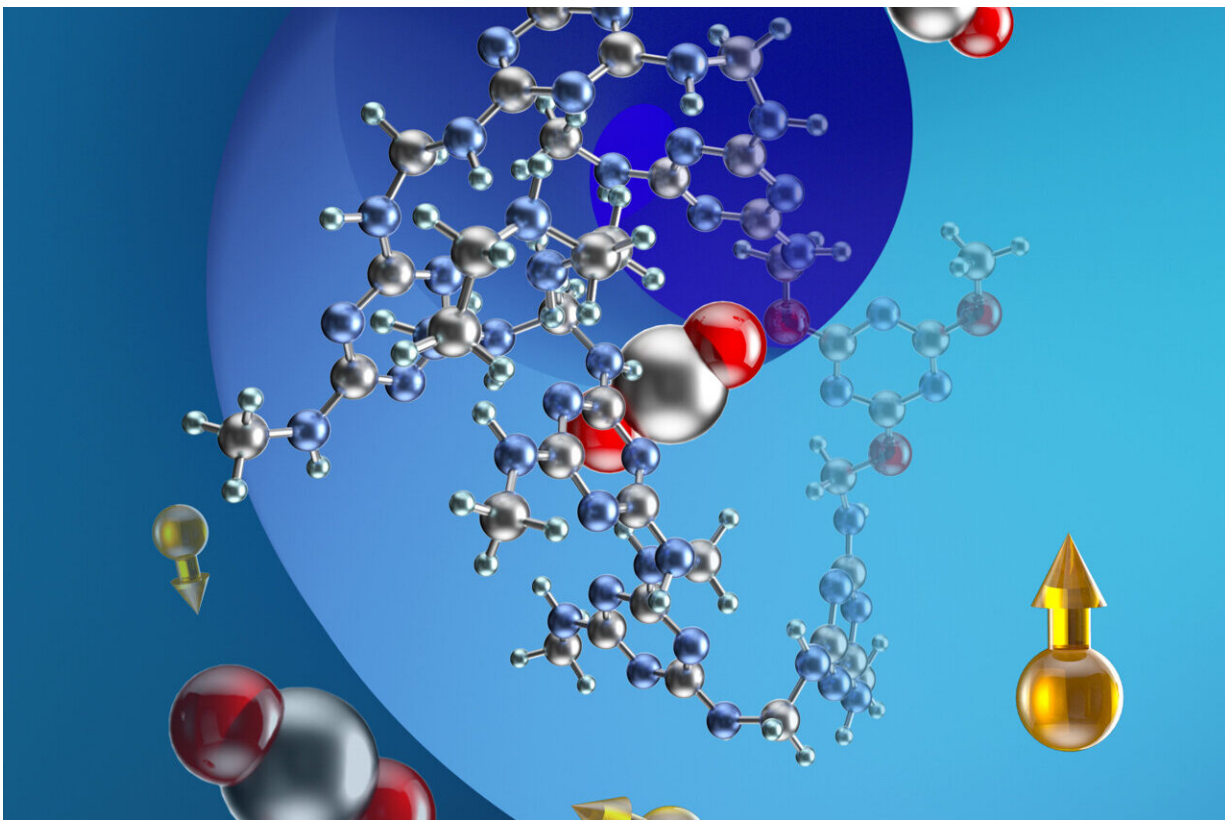

UC Berkeley researchers developed a brand-new family of sustainable, scalable, solid-state materials — polyamine-appended, cyanuric acid-stabilized, melamine nanoporous networks — that spontaneously adsorb CO₂ for carbon capture and storage. In the graphic, carbon dioxide molecules (carbon in silver, oxygen in red) interact with amines in the material (nitrogen in blue, hydrogen in green), allowing the material to adsorb the gas from smokestack emissions. The yellow balls with arrows represent carbon-13 isotopes and their nuclear spins, which were employed in NMR studies of the material. Credit: Haiyan Mao and Jeffrey Reimer, UC Berkeley

But carbon capture is far from commercially viable. The best technique today involves piping [flue gases](#) through liquid amines, which bind CO₂. But this requires large amounts of energy to release the carbon dioxide once it's bound to the amines, so that it can be concentrated and stored

underground. The amine mixture must be heated to between 120 and 150 degrees Celsius (250-300 degrees Fahrenheit) to regenerate the CO₂.

In contrast, the melamine porous network with DETA and cyanuric acid modification captures CO₂ at about 40 degrees Celsius, slightly above room temperature, and releases it at 80 degrees Celsius, below the boiling point of water. The energy savings come from not having to heat the substance to high temperatures.

In its research, the Berkeley/Stanford/Texas team focused on the common polymer melamine, which is used not only in Formica but also inexpensive dinnerware and utensils, industrial coatings and other plastics. Treating melamine powder with formaldehyde—which the researchers did in kilogram quantities—creates nanoscale pores in the melamine that the researchers thought would absorb CO₂.

Mao said that tests confirmed that formaldehyde-treated melamine adsorbed CO₂ somewhat, but adsorption could be much improved by adding another amine-containing chemical, DETA (diethylenetriamine), to bind CO₂. She and her colleagues subsequently found that adding cyanuric acid during the polymerization reaction increased the pore size dramatically and radically improved CO₂ capture efficiency: Nearly all the carbon dioxide in a simulated flue gas mixture was absorbed within about 3 minutes.

The addition of cyanuric acid also allowed the material to be used over and over again.

Mao and her colleagues conducted solid-state [nuclear magnetic resonance](#) (NMR) studies to understand how cyanuric acid and DETA interacted to make carbon capture so efficient. The studies showed that cyanuric acid forms strong hydrogen bonds with the melamine network that helps stabilize DETA, preventing it from leaching out of the

melamine pores during repeated cycles of carbon capture and regeneration.

"What Haiyan and her colleagues were able to show with these elegant techniques is exactly how these groups intermingle, exactly how CO₂ reacts with them, and that in the presence of this pore-opening cyanuric acid, she's able to cycle CO₂ on and off many times with capacity that's really quite good," Reimer said. "And the rate at which CO₂ adsorbs is actually quite rapid, relative to some other materials. So, all the practical aspects at the laboratory scale of this material for CO₂ capture have been met, and it's just incredibly cheap and easy to make."

"Utilizing solid-state nuclear magnetic resonance techniques, we systematically elucidated in unprecedented, atomic-level detail the mechanism of the reaction of the amorphous networks with CO₂," Mao said. "For the energy and environmental community, this work creates a high-performance, solid-state network family together with a thorough understanding of the mechanisms, but also encourages the evolution of porous materials research from trial-and-error methods to rational, step-by-step, atomic-level modulation."

The Reimer and Cui groups are continuing to tweak the pore size and amine groups to improve the carbon capture efficiency of [melamine](#) porous networks, while maintaining the energy efficiency. This involves using a technique called dynamic combinatorial chemistry to vary the proportions of ingredients to achieve effective, scalable, recyclable and high-capacity CO₂ capture.

Reimer and Mao have also closely collaborated with the Cui group at Stanford to synthesize other types of materials, including [hierarchical nanoporous membranes](#)—a class of nanocomposites combined with a carbon sphere and graphene oxide—and [hierarchical nanoporous carbons](#) made from pine wood, to adsorb carbon dioxide. Reimer

developed solid-state NMR specifically to characterize the mechanism by which solid materials interact with [carbon dioxide](#), in order to design better materials for [carbon](#) capture from the environment and energy storage. Cui developed a robust and sustainable solid-state platform and fabrication techniques for creating new materials to address climate change and energy storage.

More information: Haiyan Mao et al, A scalable solid-state nanoporous network with atomic-level interaction design for carbon dioxide capture, *Science Advances* (2022). [DOI: 10.1126/sciadv.abo6849](https://doi.org/10.1126/sciadv.abo6849)

Provided by University of California - Berkeley

Citation: A simple, cheap material for carbon capture, perhaps from tailpipes (2022, August 5) retrieved 19 April 2024 from <https://phys.org/news/2022-08-simple-cheap-material-carbon-capture.html>

This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.