


Breaking an optical rule: Engineers find a way to manipulate light at the nanoscale

September 12 2022, by Mike Williams

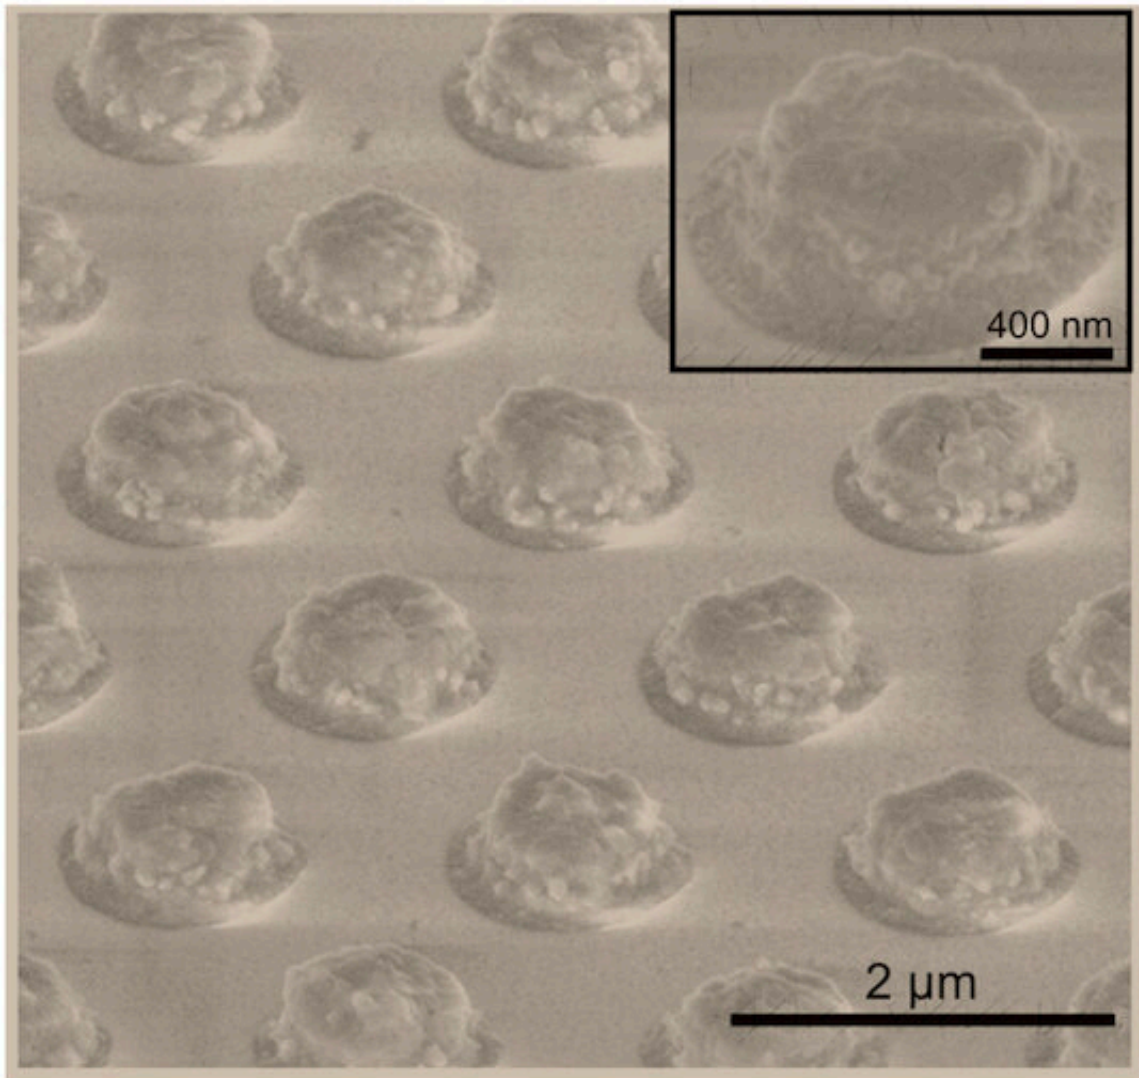

A scanning electron microscope image of an iron pyrite metasurface created at Rice University to test its ability to transcend the Moss rule, which describes a trade-off between a material's optical absorption and how it refracts light. The research shows potential to improve screens for virtual reality and 3D displays

along with optical technologies in general. Credit: The Naik Lab

If you're going to break a rule with style, make sure everybody sees it. That's the goal of engineers at Rice University who hope to improve screens for virtual reality, 3D displays and optical technologies in general.

Gururaj Naik, an associate professor of electrical and computer engineering at Rice's George R. Brown School of Engineering, and Applied Physics Graduate Program alumna Chloe Doiron found a way to manipulate light at the nanoscale that breaks the Moss rule, which describes a trade-off between a material's optical absorption and how it refracts light.

Apparently, it's more like a guideline than an actual rule, because a number of "super-Mossian" semiconductors do exist. Fool's gold, aka iron pyrite, is one of them.

For their study in *Advanced Optical Materials*, Naik, Doiron and co-author Jacob Khurgin, a professor of electrical and [computer engineering](#) at Johns Hopkins University, find iron pyrite works particularly well as a nanophotonic material and could lead to better and thinner displays for wearable devices.

More important is that they've established a method for finding materials that surpass the Moss rule and offer useful light-handling properties for displays and sensing applications.

"In optics, we're still limited to a very few materials," Naik said. "Our [periodic table](#) is really small. But there are so many materials that are simply unknown, just because we haven't developed any insight on how

to find them."

"That's what we wanted to show: There are physics that can be applied here to short-list the materials, and then help us look for those that can get us to whatever the industrial needs are," he said.

"Let's say I want to design an LED or a waveguide operating at a given wavelength, say 1.5 micrometers," Naik said. "For this wavelength, I want the smallest possible waveguide, which has the smallest loss, meaning that can confine light the best."

Choosing a material with the highest possible refractive index at that wavelength would normally guarantee success, according to Moss.

"That's generally the requirement for all optical devices at the nanoscale," he said. "The materials must have a bandgap slightly above the wavelength of interest, because that's where we begin to see less light getting through."

"Silicon has a refractive index of about 3.4, and is the gold standard," Naik said. "But we started asking if we could go beyond silicon to an index of 5 or 10."

That prompted their search for other optical options. For that, they developed their formula to identify super-Mossian dielectrics.

"In this work, we give people a recipe that can be applied to the publicly available database of materials to identify them," Naik said.

The researchers settled on experiments with iron pyrite after applying their theory to a database of 1,056 compounds, searching in three bandgap ranges for those with the highest refractive indices. Three compounds along with pyrite were identified as super-Mossian candidates, but pyrite's low cost and long use in photovoltaic and

catalytic applications made it the best choice for experiments.

"Fool's gold has traditionally been studied in astrophysics because it's commonly found in interstellar debris," Naik said. "But in the context of optics, it's little-known."

He noted iron pyrite has been studied for use in solar cells. "In that context, they showed [optical properties](#) in the [visible wavelengths](#), where it's really lossy," he said. "But that was a clue for us, because when something is extremely lossy in the visible frequencies, it's likely going to have a very high refractive index in the near-infrared."

So the lab made optical-grade [iron pyrite](#) films. Tests of the material revealed a [refractive index](#) of 4.37 with a band gap of 1.03 electron volts, surpassing the performance predicted by the Moss rule by about 40%.

That's great, Naik said, but the search protocol could—and likely will—find materials that are even better.

"There are many candidates, some of which haven't even been made," he said.

More information: Chloe F. Doiron et al, Super-Mossian Dielectrics for Nanophotonics, *Advanced Optical Materials* (2022). [DOI: 10.1002/adom.202201084](#)

Provided by Rice University

Citation: Breaking an optical rule: Engineers find a way to manipulate light at the nanoscale (2022, September 12) retrieved 24 May 2024 from <https://phys.org/news/2022-09-optical->

[nanoscale.html](#)

This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.