


Novel protective layer for catalysts improves lifespan and performance

January 18 2023

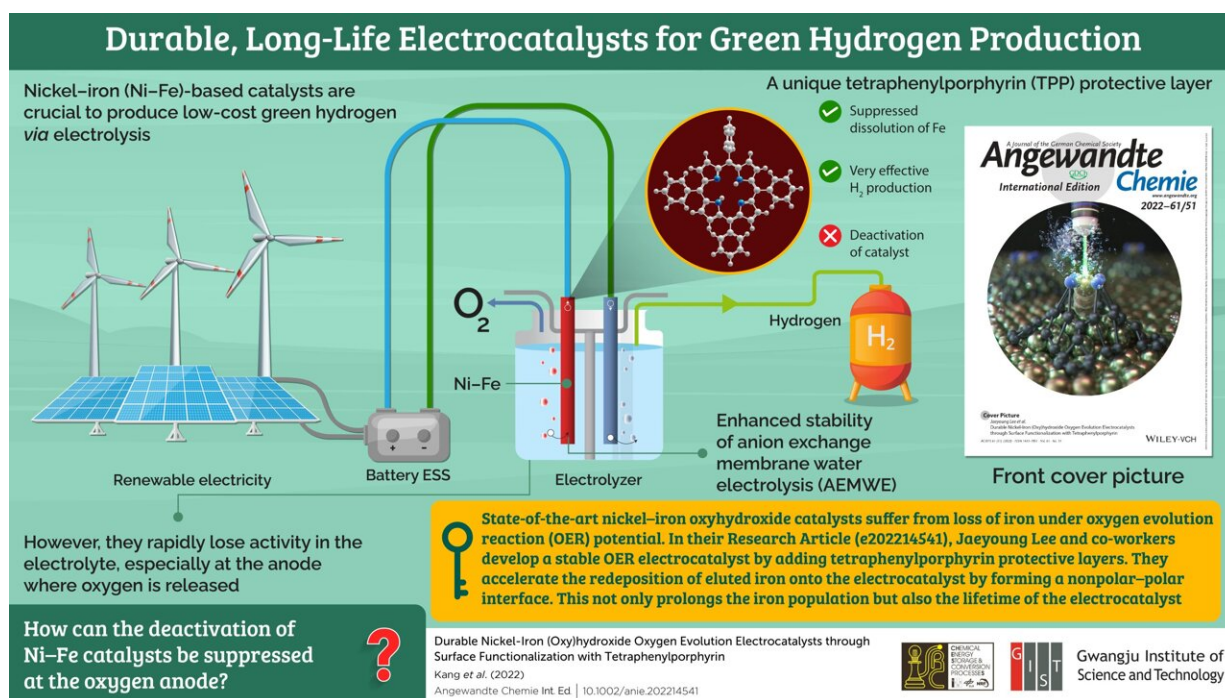

The TPP protection layer suppresses the dissolution of Fe at the anode in electrochemical water-splitting reactions, thereby prolonging the life of the catalyst and improving its performance. Credit: Jaeyoung Lee of Gwanju Institute of Science and Technology

Green hydrogen is hydrogen fuel that is produced using environment-friendly methods. Water electrolysis is one of the primary methods of producing green hydrogen. Here, electrical energy generated using

renewable energy sources, such as solar panels or wind energy, is used to drive a water-splitting reaction in an electrochemical cell to produce hydrogen and oxygen.

However, this reaction requires the use of expensive catalysts, which increases the cost of green hydrogen, making it unviable. Using nickel–iron (Ni–Fe) catalysts at the anode is a possible solution, but these catalysts tend to corrode and get deactivated due to the oxygen released at the anode of the water-splitting cell.

To address this issue, a team of researchers led by Professor Jaeyoung Lee of Gwangju Institute of Science and Technology, Korea created a protection layer for Ni–Fe catalysts that can increase their life and performance.

According to Prof. Lee, "The major deactivation route for Ni–Fe catalysts is the dissolution of Fe at the oxygen emitting anode of the water-splitting cell. So, we developed an Ni–Fe-based catalyst with a tetraphenylporphyrin (TPP) protection layer. The TPP layer was able to minimize the dissolution of Fe during the oxygen evolution reaction and thus, increase the life and performance of the catalyst."

Their research was published in *Angewandte Chemie*.

The research team found that the TPP layer was able to shield the Ni–Fe catalyst by creating a non-polar region around the catalyst, which significantly slowed down and reduced the dissolution of the unstable Fe atoms in the catalyst. The TPP protection layer was also seen to increase the redeposition of Fe atoms back on to the catalyst. These two effects combined to increase the life of the Ni–Fe catalyst. The researchers found that the TPP protected Ni–Fe catalyst was able to sustain high hydrogen production for prolonged periods.

"Water-splitting offers a solution to meet the Paris Climate Agreement goal of being carbon neutral by 2050, since [water electrolysis](#) doesn't emit the carbon dioxide while producing hydrogen. But the price of hydrogen production using water electrolysis is still too high. This research can help us reduce the costs by using inexpensive, non-noble materials like Ni and Fe with a protection layer. This can lead us to a more sustainable future for all of us," concluded Prof. Lee.

More information: Sinwoo Kang et al, Durable Nickel-Iron (Oxy)hydroxide Oxygen Evolution Electrocatalysts through Surface Functionalization with Tetraphenylporphyrin, *Angewandte Chemie International Edition* (2022). [DOI: 10.1002/anie.202214541](https://doi.org/10.1002/anie.202214541)

Provided by GIST (Gwangju Institute of Science and Technology)

Citation: Novel protective layer for catalysts improves lifespan and performance (2023, January 18) retrieved 10 May 2024 from <https://phys.org/news/2023-01-layer-catalysts-lifespan.html>

This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.
