


Space geodetic observations help reveal variations in Earth's surface loads

July 24 2023, by Li Yuan

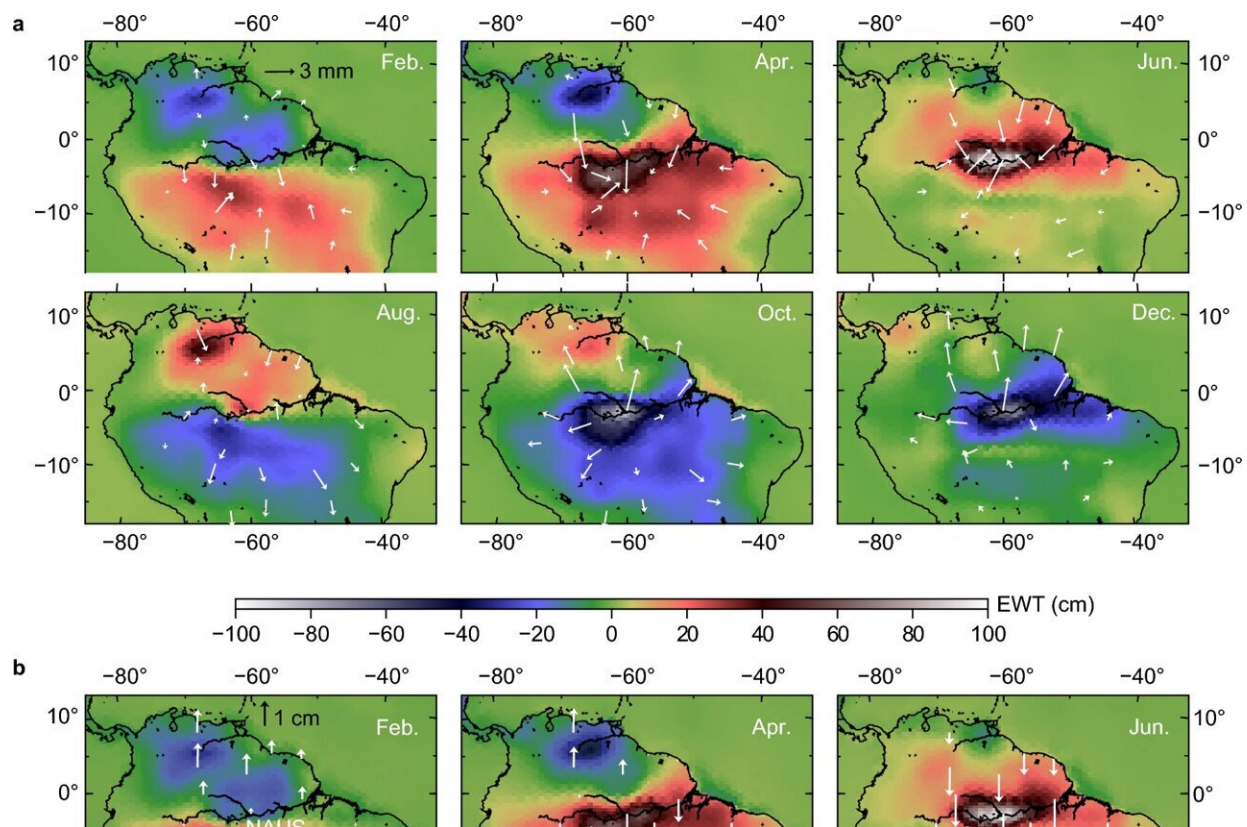

Average horizontal (a) and vertical (b) displacements in 6 months at GNSS stations in northern South America. The data are from Nevada Geodetic Laboratory (NGL), Univ. Nevada Reno (UNR) (Blewitt et al., 2018), plotted with average seasonal mass anomaly distributions from CSR GRACE mascons (Save, 2019). The horizontal displacements reflect the direction of spatial mass gradient and the subsidence and uplift reflect the positive and negative mass anomalies, respectively. d The de-trended time series of north (red) and up (blue) components of NAUS (Manaus in the middle of the Amazon Basin)

station are shown together with average seasonal (annual and semiannual) change curves. During an ENSO episode in 2015–2016 (c), abnormally small rain made NAUS uplift more than other years (d). Credit: *Satellite Navigation* (2023). DOI: 10.1186/s43020-023-00113-6

Motion of the Earth's surface mass, including the atmosphere and oceans as well as hydrology and glacier melting, causes the redistribution of Earth's surface loads, deformation of the solid Earth, and variations in the gravity field.

A research team led by Prof. Jin Shuanggen from the Shanghai Astronomical Observatory (SHAO) of the Chinese Academy of Sciences has used space geodetic observations to reveal seasonal and intra-seasonal signal variations in the Earth's [surface](#) loads.

They investigated displacements from the Global Navigation Satellite System (GNSS) and time-variable gravity from the Gravity Recovery and Climate Experiment (GRACE) to extract surface load signals and explore their geophysical applications. The results indicate that space geodesy offers an effective method of studying surface loads and the crustal movements caused by them. The study was published in *Satellite Navigation* on July 24.

In early days, displacements generated by Earth's surface loads were not large enough to be detected by conventional nonglobal measuring techniques and were thus considered to be noise that disturbed tectonic motion signals. In the 1990s, however, geodesists started observing crustal movements precisely, at high spatial and [temporal resolution](#), using dense networks of continuous GNSS observation stations.

They found significant seasonal signals overlaid on secular tectonic

movements, and such seasonal signals gradually drew their attention. The launch of the GRACE satellites in 2002 enabled scientists to directly observe mass anomalies on Earth from space, and the combination of the GRACE and GNSS observations contributed to making surface load studies more convincing.

Previously, the research team had studied seasonal (periodic) and intra-seasonal surface loads using surface displacements from GNSS and mass anomalies from GRACE. They obtained several significant results, e.g., variations in Earth's dynamic oblateness, high-resolution global time-variable gravity fields, extreme droughts in the southwestern United States, and water loads from heavy rains in Japan.

In this study, the researchers presented the long-term and seasonal changes in displacements at GNSS stations and mass anomalies from GRACE in northern South America. They found subsidence and uplift in regions of positive and negative mass anomalies, respectively. On the other hand, GNSS stations moved in the direction from negative to positive mass anomalies. The space geodetic observations have reasonably monitored seasonal changes in land hydrological loads characterized by the alternation of rainy and dry seasons near the equator.

As for the map showing mass anomalies and surface displacements on Hokkaido Island in northern Japan, interannual variations in mass anomalies and amplitudes of seasonal crustal movements well reflected interannual variations in snow amount.

Displacements and mass anomalies from GNSS and GRACE provide complementary information on seasonal changes in surface loads, such as terrestrial hydrological loads. "Due to the different spatial resolutions of the two techniques, displacements and mass anomalies are often inconsistent with each other when surface loads are composed of

complex small-scale anomalies. This will be a key direction of future geodetic investigations of surface loads," said Prof. Kosuke Heki, visiting professor at SHAO.

Furthermore, continuous GNSS observation displacements can be used to inverse the time-varying [gravity field](#) and monitor water loads [anomaly](#) change together with GRACE measurements. "We have obtained tools to study monthly global gravity fields and high temporal-spatial resolution geophysical loads signals and such space geodetic techniques will be important for monitoring disastrous floods and droughts," said Prof. Jin.

More information: Kosuke Heki et al, Geodetic study on earth surface loading with GNSS and GRACE, *Satellite Navigation* (2023). [DOI: 10.1186/s43020-023-00113-6](https://doi.org/10.1186/s43020-023-00113-6)

Provided by Chinese Academy of Sciences

Citation: Space geodetic observations help reveal variations in Earth's surface loads (2023, July 24) retrieved 27 April 2024 from <https://phys.org/news/2023-07-space-geodetic-reveal-variations-earth.html>

This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.