


# Developing novel conducting polymer-hydrogel interpenetrating networks for neural interfacing

September 15 2023, by Li Yuan

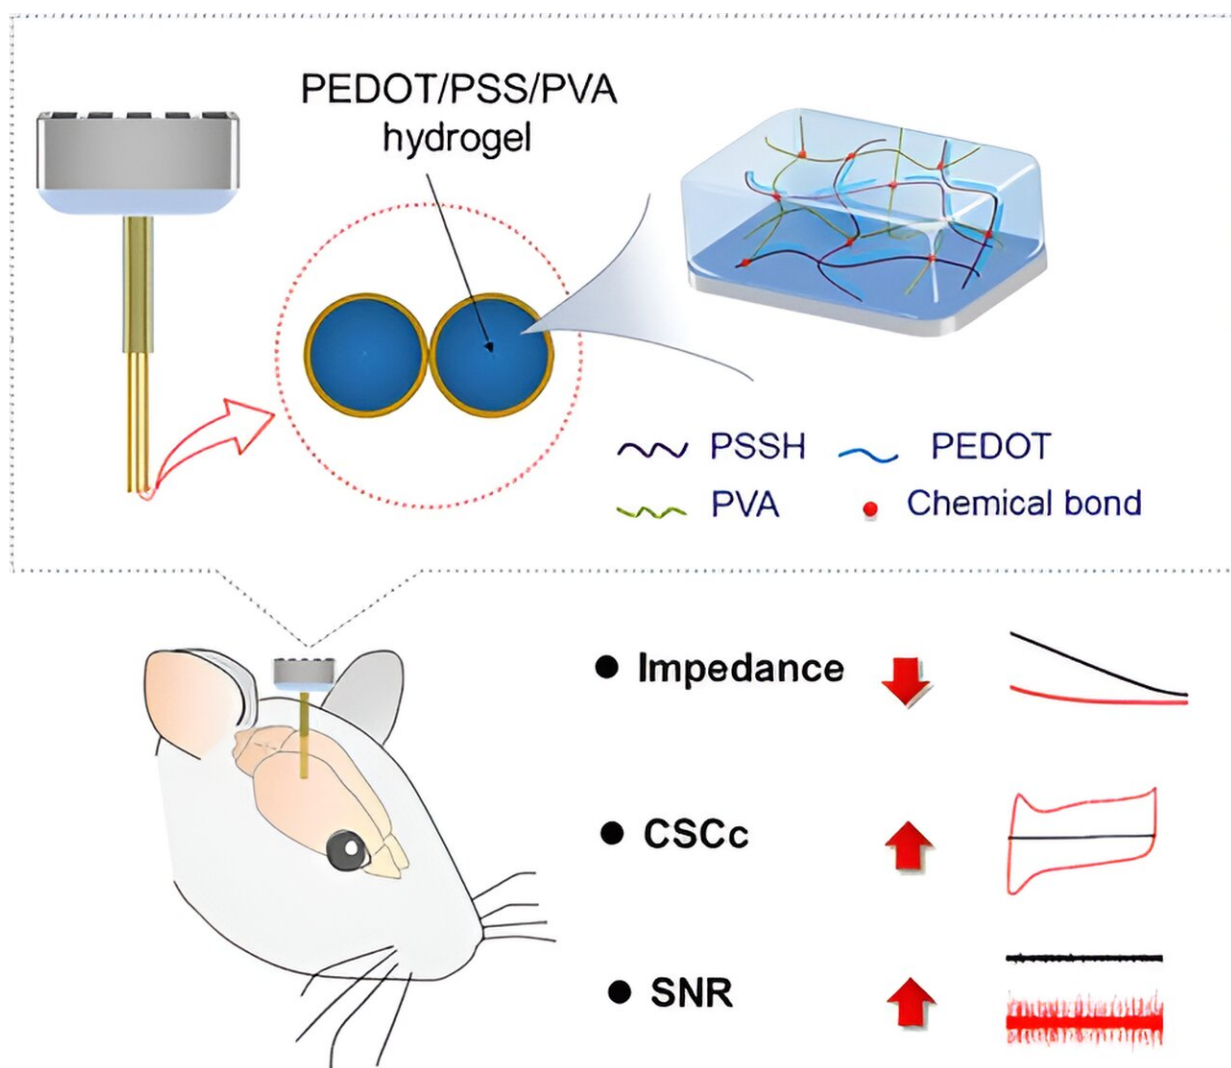

Graphical abstract. Credit: *ACS Applied Materials & Interfaces* (2023). DOI:

A research group led by Prof. Lu Yi from the Shenzhen Institute of Advanced Technology (SIAT) of the Chinese Academy of Sciences (CAS) has proposed three-dimensional (3D) conductive polymer-hydrogel interpenetrating networks for high-performance chronic electrode/neural interfacing. The study was published in *ACS Applied Materials & Interfaces*.

Long-term, reliable detection of electrophysiological signals is pivotal for comprehending mechanisms that underlie brain disorders and for advancing effective treatments. Nonetheless, maintaining stability and biocompatibility of neural electrode [interface](#) for necessary extended periods remains challenging.

Poly (3,4-ethylenedioxythiophene), or PEDOT, is known for its excellent biocompatibility and low electrochemical impedance, making it a commonly used modified conductive polymer material in neural-electrode interfaces. However, PEDOT films often exhibit cracks or delaminations due to their limited electrochemical and [mechanical stability](#), posing a significant challenge to the long-term viability of neural electrodes.

To address this issue, the researchers proposed a novel interface modification strategy in their work. They prepared a polystyrene sulfonate/polyvinyl alcohol (PSS/PVA) hydrogel film and applied it as a pre-coating on the surfaces of a microelectrode array, forming a 3D scaffold rich in counter ions.

Subsequently, they electropolymerized the 3, 4-ethylene dioxythiophene monomer within the PSS/PVA scaffold to create an interpenetrating

conducting polymer network (ICPN). The resultant ICPN exhibited 3D highly porous microstructure, with pore sizes ranging from 0.1 to 1.0  $\mu\text{m}$ .

This 3D porous structure plays a significant role in dissipating [mechanical energy](#), enhancing adhesion, and ensuring the long-term stability of the conducting hydrogel coatings. Additionally, the ICPN film possesses a low Young's modulus (191 kPa) and remarkable stretchability (72%).

The research team also discovered that this ICPN film featured low electrochemical impedance, high capacitance, and outstanding biocompatibility, meeting the requirements for neural interfaces in a wide range of in-vivo applications.

Furthermore, the researchers conducted a comparative analysis of the electrophysiological signal quality between ICPN and PEDOT/PSS film-modified neural electrode arrays after 12 weeks of implantation into the mouse hippocampus.

Their findings indicated that ICPN-modified interfaces significantly enhanced the quality of signals during chronic electrophysiological recordings.

The study holds potential to expand applications of neural implants and provides new insights into diagnosis and treatment of neuropsychiatric disorders in the future.

**More information:** Mengying Yan et al, Conducting Polymer-Hydrogel Interpenetrating Networks for Improving the Electro-Neural Interface, *ACS Applied Materials & Interfaces* (2023). [DOI: 10.1021/acsami.3c07189](https://doi.org/10.1021/acsami.3c07189)

Provided by Chinese Academy of Sciences

Citation: Developing novel conducting polymer-hydrogel interpenetrating networks for neural interfacing (2023, September 15) retrieved 21 May 2024 from

<https://phys.org/news/2023-09-polymer-hydrogel-interpenetrating-networks-neural-interfacing.html>

<p>This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.</p>
--