


Novel electrification strategy enhances low-temperature NO_x removal

December 29 2023, by ZHANG Nannan

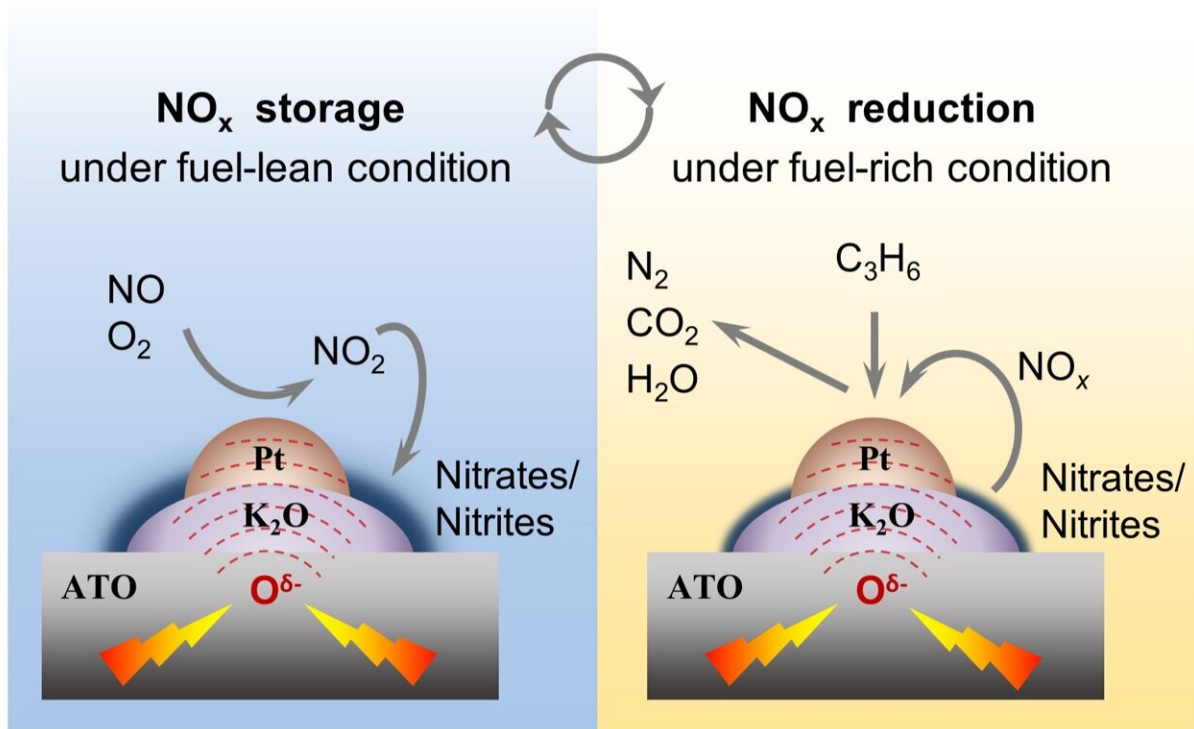

The procedure of electrified NO_x storage–reduction. Credit: NIMTE

Prof. Zhang Jian's group from the Ningbo Institute of Materials Technology and Engineering of the Chinese Academy of Sciences, cooperating with Prof. Zhang Zhaoliang's group from University of Jinan, has developed a novel electrification strategy to improve NO_x

pollutant removal performance at low temperatures.

The study was published in [Environmental Science & Technology](#). NO_x storage reduction (NSR) is a promising approach to control NO_x emissions from [diesel vehicles](#), thus to address the growing global energy crisis and [climate change](#).

However, due to the improvement of engine technologies and frequent idling in traffic, the exhaust temperatures are usually below 250 °C, which is too low for catalytic NO_x conversion to occur.

To address this issue, the researchers developed a novel electrified NSR strategy. Pt and K co-supported antimony-doped tin oxides (Pt-K/ATO) serve as conductive catalysts. Using C₃H₆ as a reductant, a low input power (0.5-4 W) was applied to the catalyst to trigger NSR reactions.

With this strategy, the ignition temperature for 10% NO_x conversion was reduced to 165 °C, which is nearly 100 °C lower than that of the traditional thermal counterpart.

To optimize the power configuration, the fuel-lean power was reduced, resulting in a 23% increase in the maximum energy efficiency.

In addition, the electrically driven release of lattice oxygen from the catalysts is shown to play crucial roles in the NSR reactions, including promoting NO oxidation for NO_x adsorption, O₂ evolution for NO_x desorption, as well as C₃H₆ activation for NO_x reduction, thus greatly improving the NSR performance.

As reported in the previous work of the research group, this effect has also been applied to catalytic soot combustion, demonstrating its certain universality.

This electrification strategy may shed light on the design of hybrid vehicles, especially on developing electronic control units, since the electric [power](#) input can be adjusted in real-time to reduce exhaust pollutants.

More information: Xueyi Mei et al, Electrification-Enhanced Low-Temperature NO_x Storage–Reduction on Pt and K Co-Supported Antimony-Doped Tin Oxides, *Environmental Science & Technology* (2023). [DOI: 10.1021/acs.est.3c05354](https://doi.org/10.1021/acs.est.3c05354)

Provided by Chinese Academy of Sciences

Citation: Novel electrification strategy enhances low-temperature NO_x removal (2023, December 29) retrieved 28 April 2024 from <https://phys.org/news/2023-12-electrification-strategy-low-temperature-nox.html>

This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.