


Urban planning should consider building height, shape and arrangement to protect pedestrians during rain and wind

April 9 2024

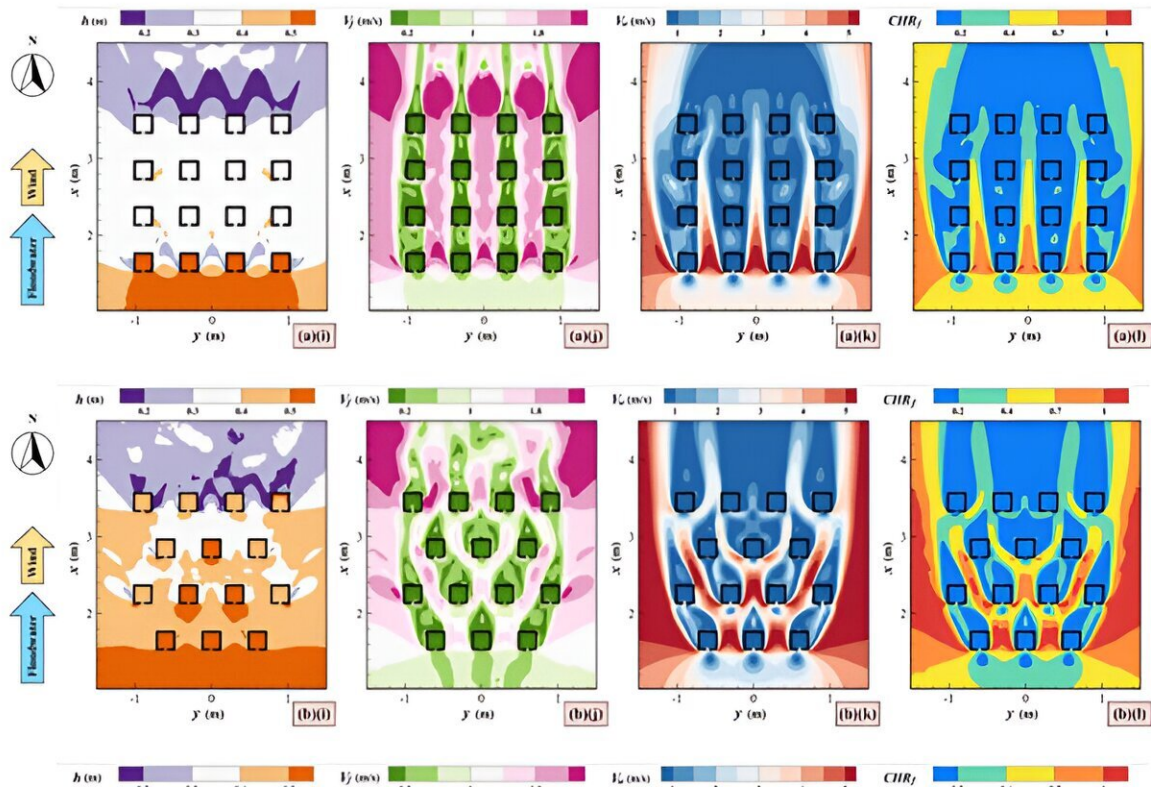

Pedestrian safety zones for three types of urban block layouts: arrayed, staggered, and enclosed. The leftmost column displays simulated water depth, the next column shows floodwater velocity, the third shows simulated windspeed at pedestrian level, and the final column shows the compound hazard rating (CHR). Higher CHR indicates increased risk.. Credit: Zhong-Fan Zhu

A city's skyline—the distinctive shapes and arrangements of its buildings—impacts the safety of its population during floods. When the streets flood, pedestrians can be swept under the current and injured or killed. With climate change and rising urbanization, the likelihood and severity of urban flooding are increasing.

Not all [city](#) blocks are created equal. In *Physics of Fluids*, researchers from Beijing Normal University, Beijing Hydrological Center, and the China Institute of Water Resources and Hydropower Research investigated how city design contributes to [pedestrian safety](#) during flooding.

"Climate change leads to an increasing trend of extreme precipitation events in terms of frequency and intensity," said author Zhong-Fan Zhu. "Rapid urbanization alters the hydrological properties of the underlying surface in urban areas. For example, previous forestland, wetland, and [agricultural land](#) have been paved to construct impervious, urban lands. These factors contribute to frequency occurrences of urban flood events."

The researchers experimentally identified the flood conditions that make pedestrians vulnerable and utilized computer simulations of different city block patterns, building heights, and street widths to assess the configurations that best protect people.

Each city has unique buildings and building configurations. The team simulated three different urban block layouts: buildings neatly arranged and equally spaced in columns and rows, buildings offset and staggered, and a square tightly outlined by buildings with just four buildings enclosed within.

When buildings are arranged in a line, as in the grid and enclosed layout, they provide a zone of safety by blocking some of the water and wind.

The staggered approach has none of this protection and more danger zones due to increased water and wind circulation.

Altering the building shape can also protect pedestrians. Rounding or adding recesses to building corners significantly reduced areas of dangerously high floodwater and windspeed. However, this intervention also somewhat decreased the safety zone.

Wind was a critical, yet complex, factor in determining safety.

"In some cases, the floodwater does not cause pedestrian instability, but adding the wind force will lead to a dangerous situation," said Zhu.

"However, in other cases, the wind will help to maintain pedestrian stability and protect against floodwater. It seems like that wind is like a 'double-edged sword.'"

Different building height arrangements can help mitigate the negative impacts of wind.

Cities looking to expand should consider enclosed block arrangements, buildings with rounded or even circular footprints, and potentially consult with a physicist.

More information: Physical vulnerability of pedestrians under the joint effect of wind and floodwater and its application in urban block flooding: Effects of urban block layout, building form and building array skyline, *Physics of Fluids* (2024). [DOI: 10.1063/5.0191951](https://doi.org/10.1063/5.0191951)

Provided by American Institute of Physics

Citation: Urban planning should consider building height, shape and arrangement to protect

pedestrians during rain and wind (2024, April 9) retrieved 2 May 2024 from
<https://phys.org/news/2024-04-urban-height-pedestrians.html>

This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.