

# Printed sensors in soil could help farmers improve crop yields and save money

June 27 2024, by Adam Malecek

---



Soil science Ph.D. student Shuohao Cai places a sensing rod, which has multifunctional sensing stickers positioned to enable multi-depth measurements, in soil at UW-Madison's Hancock Agricultural Research Station to test the team's technology. Credit: Kuan-Yu.

University of Wisconsin–Madison engineers have developed low-cost

sensors that allow for real-time, continuous monitoring of nitrate in soil types that are common in Wisconsin. These printed electrochemical sensors could enable farmers to make better informed nutrient management decisions and reap economic benefits.

"Our sensors could give farmers a greater understanding of the nutrient profile of their soil and how much nitrate is available for the plants, helping them to make more precise decisions on how much fertilizer they really need," says Joseph Andrews, an assistant professor of mechanical engineering at UW–Madison who led the research. "If they can buy less fertilizer, the cost savings could be quite significant at large-acreage farms."

While nitrate is an essential nutrient for growing crops, excess nitrate can leach out of soil and into groundwater. This type of pollution is dangerous for people who drink contaminated well water and is harmful for the environment. The researchers' new sensors could also be used as an agricultural research tool to monitor nitrate leaching and help guide best practices for mitigating its harmful effects.


Current methods for monitoring nitrate in the soil are laborious, expensive and don't provide [real-time](#) data. That's why Andrews, an expert in printed electronics, and his team set out to create a better and less costly solution.

For this project, the researchers used an inkjet printing process to fabricate potentiometric sensors, a type of thin-film electrochemical sensor. Potentiometric sensors are commonly used to accurately measure nitrate in liquid solutions. However, these sensors aren't typically suitable for use in soil environments, where coarse [soil particles](#) will scratch them and interfere with obtaining accurate measurements.

"The main challenge we were trying to solve is figuring out a way to

enable these electrochemical sensors to work well in the harsh environment of soil and accurately sense nitrate ions," Andrews says.

The team's solution was to place a layer over the sensor made from [polyvinylidene fluoride](#). Andrews says this material has two key features. First, it has very tiny pores, about 400 nanometers in size, that allow nitrate ions to pass through while blocking soil particles. Second, it's hydrophilic, meaning it attracts water and acts like a sponge to absorb it.

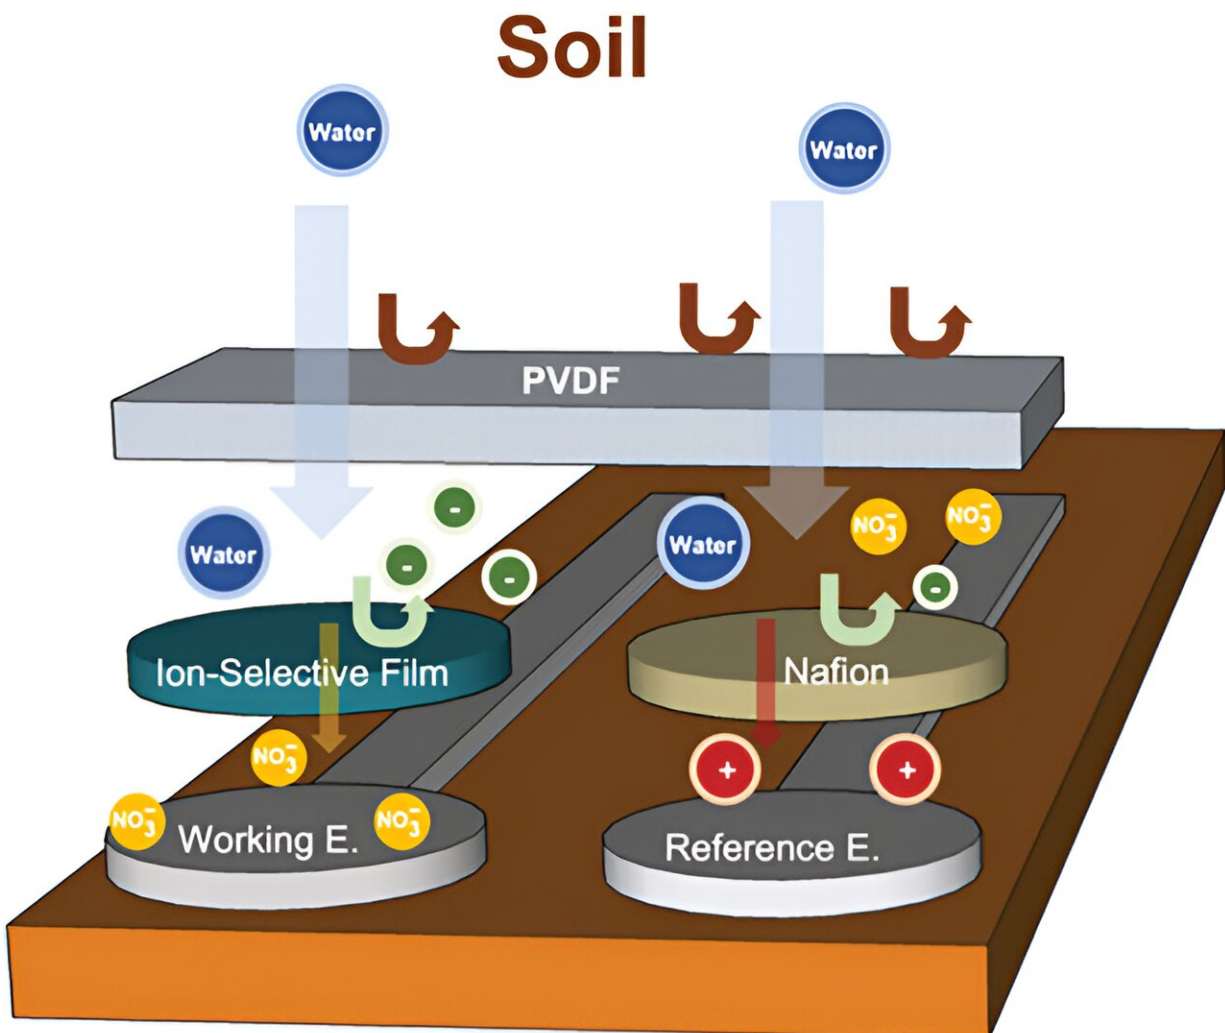

Schematic description of the working principle behind the open circuit

potentiometric sensing enabled by the PVDF membrane. Credit: *Advanced Materials Technologies* (2024). DOI: 10.1002/admt.202301140

"So, any nitrate-laden water gets preferentially soaked into our sensor, and this is really important because soil also acts like a sponge, and you're going to have a losing battle for getting moisture to come to your sensor unless you can match the water absorption potential of soil," Andrews says. "These features of the polyvinylidene fluoride layer enable us to extract the nitrate-laden water, get it to the surface of our sensor and accurately sense nitrate."

The researchers detailed their advance in a [paper published](#) in March 2024 in the journal *Advanced Material Technologies*.

The team has tested its sensors in two different soil types that are relevant for Wisconsin—[sandy soil](#), which is common in the north-central part of the state, and silt loam soil, which is common in southwestern Wisconsin—and found that the sensors produced accurate results.

The researchers are now incorporating their nitrate sensors into a multifunctional sensing system they call a "sensing sticker," in which three different kinds of sensors are mounted on a flexible plastic surface with an adhesive on the back. These stickers also contain moisture and temperature sensors.

The researchers will attach several sensing stickers to a rod, positioning them at different heights, and then bury the rod in the soil. This setup allows them to take measurements at multiple depths in the soil.

"By measuring the nitrate, moisture and temperature at different depths,

we can now quantify the process of nitrate leaching and capture how [nitrate](#) is moving through the soil, which hasn't been possible before," Andrews says.

In summer 2024, the researchers plan to conduct further testing with their sensors by deploying 30 sensing rods in the soil at UW–Madison's Hancock Agricultural Research Station and Arlington Agricultural Research Station.

UW–Madison co-authors on the paper include Kuan-Yu Chen, Aatresha Biswas, Shuohao Cai, and Jingyi Huang, a professor of soil science.

**More information:** Kuan-Yu Chen et al, Inkjet Printed Potentiometric Sensors for Nitrate Detection Directly in Soil enabled by a Hydrophilic Passivation Layer, *Advanced Materials Technologies* (2024). [DOI: 10.1002/admt.202301140](#)

Provided by University of Wisconsin-Madison

Citation: Printed sensors in soil could help farmers improve crop yields and save money (2024, June 27) retrieved 11 September 2024 from <https://phys.org/news/2024-06-sensors-soil-farmers-crop-yields.html>

This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.