


# Vehicles That Talk to Each Other Know What Lanes They're In

18 December 2007, By Lisa Zyga

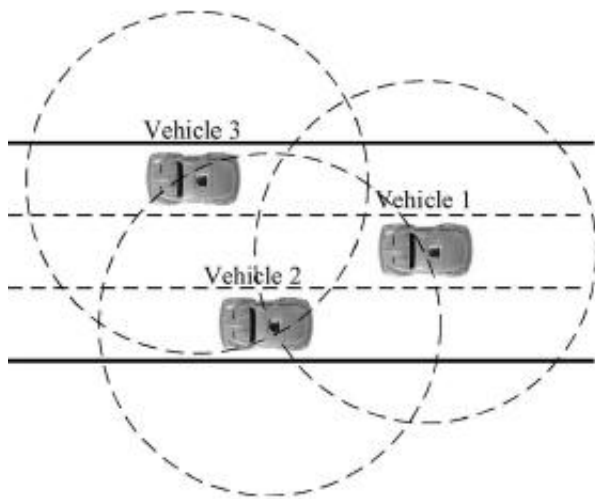

Vehicles with GPS receivers communicating with each other can increase the positioning accuracy to a level that enables them to determine what lane they're in. Credit: Thanh-Son Dao, et al. ©2007 IEEE.

A standard GPS receiver has an average 2D-positioning accuracy of about 13 meters. While this precision is high enough to direct you to your hotel, it's quite a bit lower than the accuracy required to determine which lane your car is in while driving down the highway.

A group of scientists from the University of Waterloo and California Polytechnic State University are currently working on an Auto21 project called Dynamic Collaborative Driving. Within this project, the scientists have developed an intelligent lane detection system that uses communication among GPS-equipped vehicles to achieve significantly greater accuracy than with a single GPS device. Because the new system uses only low-cost GPS receivers, a filter, and an algorithm, it has the potential to be much less expensive – as well as more robust – compared to other lane detection systems.

“The lowest accuracy GPS we used is the LocSense 40-CM, which has an accuracy of 5 meters CEP (Circular Error Portable),” Dao explained to *PhysOrg.com*. “The 5m CEP accuracy means that half of the data points fall within a circle of a 5-meter radius, half lie outside this circle. This accuracy is equivalent to 13 meters in 2dRMS, where 95% of the data points occur within a 13-meter radius. Therefore, any GPS receivers better or the same as the LocSense 40-CM can be used for lane positioning.”

As the researchers explain in their study, GPS errors from multiple sources are common. Errors can occur due to the geometry of visible satellites, atmospheric effects, clock errors, and many other causes.

However, the scientists note that GPS receivers that are relatively close to one another experience many of the same errors. This means that, even though absolute vehicle positions may have a large error, the relative position between vehicles has a smaller error, and can provide a more accurate location than a single GPS receiver can.

By communicating GPS data among vehicles traveling within about 300 meters of each other, the precise lane of each vehicle can be determined. Emergency vehicles might even be equipped with systems that have a communication range of up to 1 km.

In addition to GPS, the other two components of the system are a filter and a Markov localization algorithm. The filter minimizes the measurement noise from different GPS receivers, enhancing the system's overall quality.

“The most challenging part is designing a filter to effectively reject the receiver noise that can influence the prediction phase of the lane positioning system,” Dao explained. “We did this by using a combination of a low-pass Butterworth

filter and a particle filter to eliminate this high-pitched noise.”

Then, the Markov algorithm transforms the GPS data into a lane estimate, without the need for prior knowledge. The algorithm is probabilistic: rather than making a single hypothesis for which lane a vehicle is in, the Markov algorithm maintains a probability distribution over all possible lanes for a vehicle.

To determine if a vehicle has changed lanes, the system calculates the shortest distance between the vehicle’s current position estimate and the predicted vehicle path calculated using two previous position estimates. If the distance is close to zero, there is a low probability that the vehicle has changed lanes.

If the distance is large, then either the vehicle is switching lanes, or there’s a curve in the road. The lane-finding algorithm can distinguish between these two possibilities by estimating the arc of the road, where a lane change would not form a large arc. Further, if a vehicle changes lanes on a curved road, the system can tell because the vehicle’s previous position will not lie on the estimated arc.

The researchers tested the device both in simulations and in real road tests, where they demonstrated an accuracy of between 92 and 99%. They also noted that the algorithm could sometimes anticipate when a vehicle would change lanes before the vehicle had completed the change. They even tested the system’s ability at low speeds by calculating the lanes of two individuals walking down the street holding GPS-equipped laptops, and achieving high accuracy.

“The limitation of the system lies in the fact that it only uses GPS data to estimate lane positions,” Dao said. “This might be challenging where GPS data are not available or the GPS signal is completely blocked by large obstacles, like in a long tunnel. One possible solution to this problem is to fuse the GPS with another type of sensor, such as an IMU [Inertial Measurement Unit], until the GPS data is again available.”

A lane detection system could have many benefits

as a component of an intelligent transportation system. For example, a lane-level navigation system could advise drivers which lane to use to reach a destination without having to make a last-minute lane change. The system could also measure lane-specific traffic conditions, and advise drivers to choose a certain lane to reduce traffic congestion. Safety could be another possibility, with the system warning the driver when swerving within a lane, and even autonomously taking control of the vehicle if needed.

More information: Dao, Thanh-Son; Leung, Keith Yu Kit; Clark, Christopher Michael; and Huissoon, Jan Paul. “Markov-Based Lane Positioning Using Intervehicle Communication.” *IEEE Transactions on Intelligent Transportation Systems*, Vol. 8, No. 4, December 2007.

*Copyright 2007 PhysOrg.com.*

*All rights reserved. This material may not be published, broadcast, rewritten or redistributed in whole or part without the express written permission of PhysOrg.com.*

APA citation: Vehicles That Talk to Each Other Know What Lanes They're In (2007, December 18)  
retrieved 22 May 2019 from <https://phys.org/news/2007-12-vehicles-lanes-theyre.html>

*This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.*