


GRIN plasmonics: A practical path to superfast computing, invisibility carpet-cloaking devices

24 January 2011, by Lynn Yarris

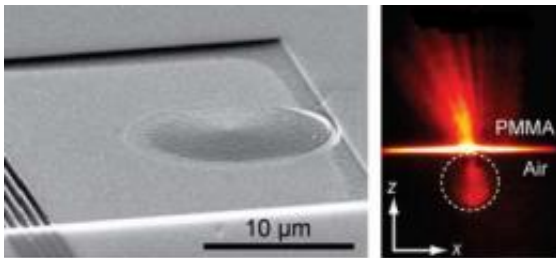

On the left is a scanning electron micrograph of a plasmonic Luneburg lens on a gold film. On the right, fluorescence imaging shows intensity of the SPPs propagated by the Luneburg lens (dotted circle). X marks the launching position of the electron beam and Z is the direction in which the SPPs propagate. Credit: Image courtesy of Zhang group

(PhysOrg.com) -- Berkeley Lab researchers have carried out the first experimental demonstration of GRIN plasmonics, a hybrid technology that opens the door to a wide range of exotic applications in optics, including superfast photonic computers, ultra-powerful optical microscopes and "invisibility" carpet-cloaking devices.

They said it could be done and now they've done it. What's more, they did it with a GRIN. A team of researchers with the U.S. Department of Energy (DOE)'s Lawrence Berkeley National Laboratory (Berkeley Lab) and the University of California, Berkeley, have carried out the first experimental demonstration of GRIN - for gradient index - plasmonics, a [hybrid technology](#) that opens the door to a wide range of exotic optics, including superfast computers based on light rather than electronic signals, ultra-powerful optical microscopes able to resolve DNA molecules with visible light, and "invisibility" carpet-cloaking devices.


Working with composites featuring a dielectric (non-conducting) material on a metal substrate, and "grey-scale" electron beam lithography, a standard method in the computer chip industry for patterning 3-D surface topographies, the researchers have fabricated highly efficient plasmonic versions of Luneburg and Eaton lenses. A Luneburg lens focuses light from all directions equally well, and an Eaton lens bends light 90 degrees from all incoming directions.

"This past year, we used computer simulations to demonstrate that with only moderate modifications of an isotropic dielectric material in a dielectric-metal composite, it would be possible to achieve practical transformation optics results," says Xiang Zhang, who led this research. "Our GRIN plasmonics technique provides a practical way for routing light at very small scales and producing efficient functional plasmonic devices."

Zhang, a principal investigator with Berkeley Lab's Materials Sciences Division and director of UC Berkeley's Nano-scale Science and Engineering Center (SINAM), is the corresponding author of a paper in the journal *Nature Nanotechnology*, describing this work titled, "Plasmonic Luneburg and Eaton Lenses." Co-authoring the paper were Thomas Zentgraf, Yongmin Liu, Maiken Mikkelsen and Jason Valentine.

GRIN plasmonics combines methodologies from transformation optics and plasmonics, two rising new fields of science that could revolutionize what we are able to do with light. In transformation optics, the physical space through which light travels is warped to control the light's trajectory, similar to the way in which outer space is warped by a massive object under Einstein's relativity theory. In plasmonics, light is confined in dimensions smaller than the wavelength of photons

in free space, making it possible to match the different length-scales associated with photonics and electronics in a single nanoscale device.

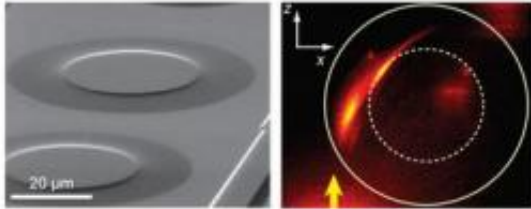

On the left, a scanning electron micrograph of Eaton lenses on a gold film. On the right, fluorescence imaging shows the intensity of SPPs propagating in z-direction (arrow) and bending to the right when passing through the lens. The solid line marks the outer diameter of the lens and the dashed line marks the high index region. Credit: Image courtesy of Zhang group

"Applying transformation optics to plasmonics allows for precise control of strongly confined light waves in the context of two-dimensional optics," Zhang says. "Our technique is analogous to the well-known GRIN optics technique, whereas previous plasmonic techniques were realized by discrete structuring of the metal surface in a metal-dielectric composite."

Like all plasmonic technologies, GRIN plasmonics starts with an electronic surface wave that rolls through the conduction electrons on a metal. Just as the energy in a wave of light is carried in a quantized particle-like unit called a photon, so, too, is plasmonic energy carried in a quasi-particle called a plasmon. Plasmons will interact with photons at the interface of a metal and dielectric to form yet another quasi-particle, a surface plasmon polariton (SPP).

The Luneburg and Eaton lenses fabricated by Zhang and his co-authors interacted with SPPs rather than photons. To make these lenses, the researchers worked with a thin dielectric film (a thermoplastic called PMMA) on top of a gold surface. When applying grey-scale electron beam lithography, the researchers exposed the dielectric film to an electron beam that was varied in dosage

(charge per unit area) as it moved across the film's surface. This resulted in highly controlled differences in film thickness across the length of the dielectric that altered the local propagation of SPPs. In turn, the "mode index," which determines how fast the SPPs will propagate, is altered so that the direction of the SPPs can be influenced.

"By adiabatically tailoring the topology of the dielectric layer adjacent to the metal surface, we're able to continuously modify the mode index of SPPs," says Zentgraf. "As a result, we can manipulate the flow of SPPs with a greater degree of freedom in the context of two-dimensional optics."

Says Liu, "The practicality of working only with the purely dielectric material to transform SPPs is a big selling point for GRIN plasmonics. Controlling the physical properties of metals on the nanometer length-scale, which is the penetration depth of electromagnetic waves associated with SPPs extending below the metal surfaces, is beyond the reach of existing nanofabrication techniques."

Adds Zentgraf, "Our approach has the potential to achieve low-loss functional plasmonic elements with a standard fabrication technology that is fully compatible with active plasmonics."

In the *Nature Nanotechnology* paper, the researchers say that inefficiencies in plasmonic devices due to SPPs lost through scattering could be reduced even further by incorporating various SPP gain materials, such as fluorescent dye molecules, directly into the dielectric. This, they say, would lead to an increased propagation distance that is highly desired for [optical](#) and plasmonic devices. It should also enable the realization of two-dimensional plasmonic elements beyond the Luneburg and Eaton lenses.

Says Mikkelsen, "GRIN plasmonics can be immediately applied to the design and production of various plasmonic elements, such as waveguides and beam splitters, to improve the performance of integrated plasmonics. Currently we are working on more complex, transformational plasmonic devices, such as plasmonic collimators, single plasmonic elements with multiple functions, and plasmonic

lenses with enhanced performance."

Provided by Lawrence Berkeley National
Laboratory

APA citation: GRIN plasmonics: A practical path to superfast computing, invisibility carpet-cloaking devices (2011, January 24) retrieved 17 October 2021 from <https://phys.org/news/2011-01-plasmonics-path-superfast-invisibility-carpet-cloaking.html>

This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.