


Researchers 'nanoweld' by applying light to aligned nanorods in solid materials

February 21 2013

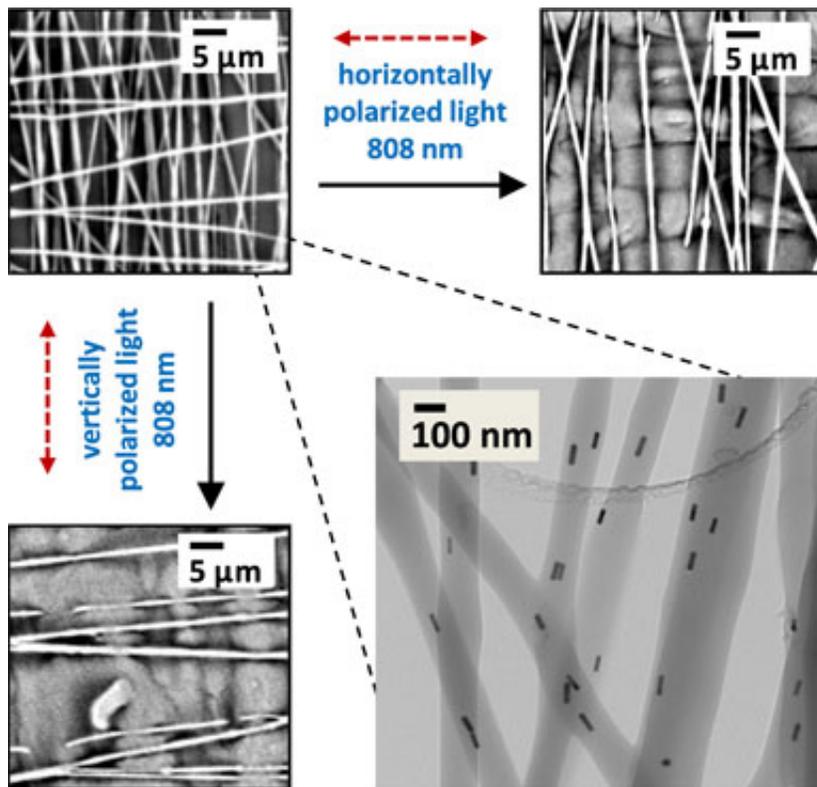

Polarized light selectively heats and melts nanofibers containing aligned gold nanorods within a cross-hatched mat when the polarization direction is parallel to the nanofiber direction. Credit: Joe Tracy, NC State University

(Phys.org)—Researchers from North Carolina State University have developed a way to melt or "weld" specific portions of polymers by embedding aligned nanoparticles within the materials. Their technique,

which melts fibers along a chosen direction within a material, may lead to stronger, more resilient nanofibers and materials.

Physicists Jason Bochinski and Laura Clarke, with materials scientist Joe Tracy, placed specifically aligned gold nanorods within a solid material. Gold nanorods absorb light at different wavelengths, depending upon the size and orientation of the nanorod, and then they convert that absorbed light directly into heat. In this case, the nanorods were designed to respond to light wavelengths of 520 nanometers (nm) in a horizontal alignment and 800 nm when vertically aligned. Human beings can see light at 520 nm (it looks green), while 808 nm is in the near [infrared spectrum](#), invisible to our eyes.

When the different [wavelengths of light](#) were applied to the material, they melted the fibers along the chosen directions, while leaving surrounding fibers largely intact.

"Being able to heat materials spatially in this way gives us the ability to manipulate very specific portions of these materials, because nanorods localize heat – that is, the heat they produce only affects the nanorod and its immediate surroundings," Tracy says.

According to Bochinski, the work also has implications for optimizing materials that have already been manufactured: "We can use heat at the nanoscale to change [mechanical characteristics](#) of objects postproduction without affecting their physical properties, which means more efficiency and less waste."

The researchers' findings appear in *Particle & Particle Systems Characterization*. The work was funded by grants from the National Science Foundation and Sigma Xi. Graduate students Wei-Chen Wu and Somsubhra Maity and former undergraduate student Krystian Kozek contributed to the work.

More information: "Anisotropic Thermal Processing of Polymer Nanocomposites via the Photothermal Effect of Gold Nanorods"
[onlinelibrary.wiley.com/doi/10 ... c.201200084/abstract](https://onlinelibrary.wiley.com/doi/10.1002/polb.22008)

Abstract

By embedding metal nanoparticles within polymeric materials, selective thermal polymer processing can be accomplished via irradiation with light resonant with the nanoparticle surface plasmon resonance due to the photothermal effect of the nanoparticles which efficiently transforms light into heat. The wavelength and polarization sensitivity of photothermal heating from embedded gold nanorods is used to selectively process a collection of polymeric nanofibers, completely melting those fibers lying along a chosen direction while leaving the remaining material largely unheated and unaffected. Fluorescence-based temperature and viscosity sensing was employed to confirm the presence of heating and melting in selected fibers and its absence in counter-aligned fibers. Such tunable specificity in processing a subset of a sample, while the remainder is unchanged, cannot easily be achieved through conventional heating techniques.

Provided by North Carolina State University

Citation: Researchers 'nanoweld' by applying light to aligned nanorods in solid materials (2013, February 21) retrieved 19 April 2024 from <https://phys.org/news/2013-02-nanoweld-aligned-nanorods-solid-materials.html>

<p>This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.</p>
--