


Researchers show how to keep cathode material 'in line' to enhance battery performance

November 19 2013

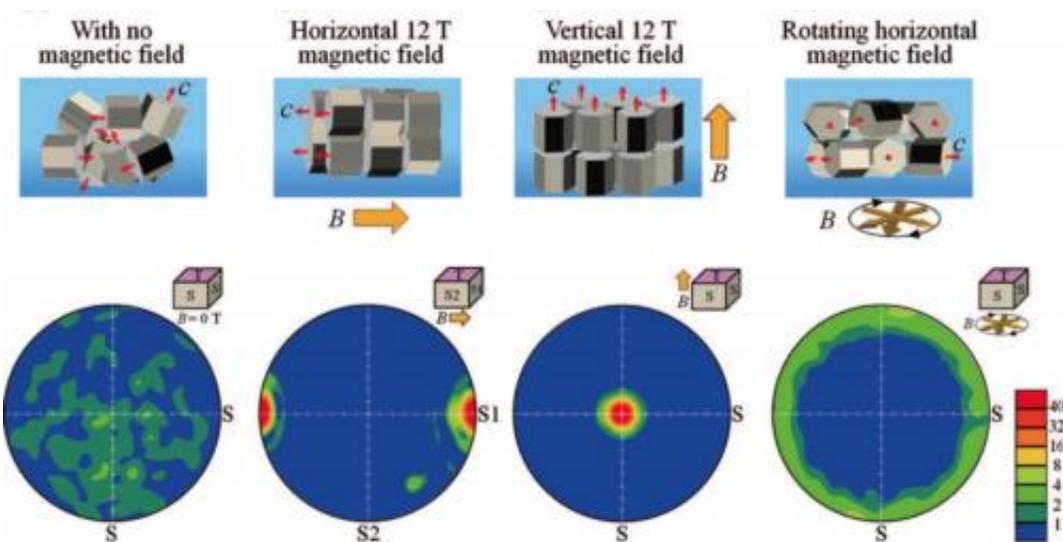

This is a schematic illustration of the crystal structure of LiCoO_2 . Credit: Reproduced from *APL Materials*

The ever-increasing market for portable electronic devices such as laptops, cell phones and MP3 players has resulted in an equally heavy demand for secondary batteries—more commonly known as rechargeable batteries—Lithium-ion (Li-ion) being among the most popular.

Scientists and engineers worldwide are seeking ways to improve the

power density, durability and overall performance of Lithium-ion batteries, and in a recent paper in the AIP Publishing journal *APL Materials*, Japanese researchers from a public-private team report an advance in Li-ion [battery](#) technology that they describe as a major breakthrough. They fabricated a cathode (positive electrode) of lithium cobalt oxide (LiCoO_2) in which the compound's individual grains are aligned in a specific orientation. The researchers claim that this yields a significantly higher-performing battery than one with a randomly-oriented LiCoO_2 cathode.

Primary, or non-rechargeable, batteries and secondary batteries both produce current through an electrochemical reaction involving a cathode, an anode, and an electrolyte (an ion-conducting material). However, apply an outside current to a secondary battery and the negative-to-positive electron flow that occurs during discharge is reversed. This allows the battery to restore lost charge.

"In a lithium-ion battery, lithium ions move from the anode to the cathode during discharge and back when charging," said Tohru Suzuki, a co-author on the *APL Materials* paper. "The material in the cathode has a layered structure to facilitate intercalation [insertion] of the lithium ions; if the structure is oriented in a specific fashion, the lithium ions have better access to the lattice and, in turn, charge-discharge performance is improved."

Using a rotating magnetic field, the researchers were able to fabricate the ideal textured microstructure of the individual LiCoO_2 grains making up the [cathode](#): a perpendicular alignment of the c-plane (the vertical side) and a random orientation of the c-axis. Unlike cathodes where the microstructures in both the c-plane and c-axis are randomly oriented, the specialized grains allow easy access for lithium ions while relaxing the stress associated with intercalation.

"This yields a highly efficient flow of electrons in both directions," Suzuki said.

More information: The article, "Ideal design of textured LiCoO₂ sintered electrode for Li-ion secondary battery" by Hideto Yamada, Tohru S. Suzuki, Tetsuo Uchikoshi, Masato Hozumi, Toshiya Saito and Yoshio Sakka appears in the journal *APL Materials*.

[dx.doi.org/10.1063/1.4824042](https://doi.org/10.1063/1.4824042)

Provided by American Institute of Physics

Citation: Researchers show how to keep cathode material 'in line' to enhance battery performance (2013, November 19) retrieved 26 April 2024 from <https://phys.org/news/2013-11-cathode-material-line-battery.html>

This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.