


# Efficiency record for black silicon solar cells jumps to 22.1 percent

18 May 2015

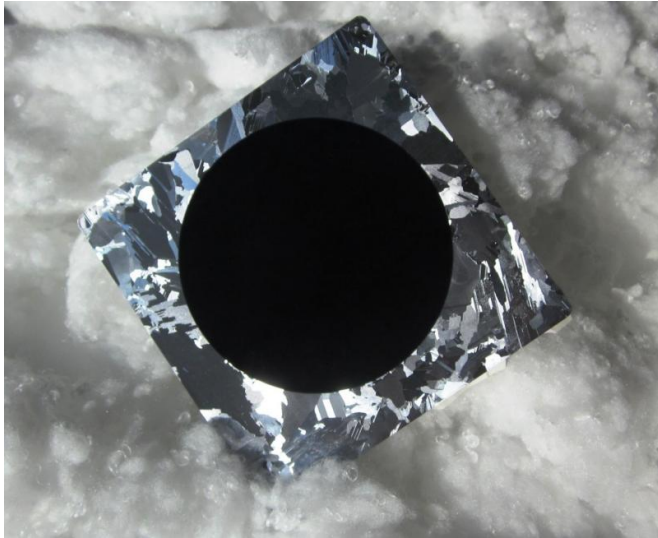

The surface area of the best cells in the study was already 9 cm<sup>2</sup>. This is a good starting point for upscaling the results to full wafers and all the way to the industrial scale. Credit: Aalto University

The researchers from Finland's Aalto University and Universitat Politècnica de Catalunya have obtained the record-breaking efficiency of 22.1% on nanostructured silicon solar cells as certified by Fraunhofer ISE CalLab. An almost 4% absolute increase to their previous record is achieved by applying a thin passivating film on the nanostructures by Atomic Layer Deposition, and by integrating all metal contacts on the back side of the cell.

The surface recombination has long been the bottleneck of black silicon [solar cells](#) and has so far limited the cell efficiencies to only modest values. The new record cells consists of a thick back-contacted structure that is known to be highly sensitive to the front surface recombination. The certified external quantum efficiency of 96% at 300nm wavelength demonstrates that the

increased surface recombination problem no longer exists and for the first time the black silicon is not limiting the final energy conversion efficiency.

The results are published online in *Nature Nanotechnology*.

## For Nordic conditions

"The [energy conversion efficiency](#) is not the only parameter that we should look at," explains Professor Hele Savin from Aalto University, who coordinated the study. Due to the ability of black cells to capture solar radiation from low angles, they generate more electricity already over the duration of one day as compared to the traditional cells.

"This is an advantage particularly in the north, where the sun shines from a low angle for a large part of the year. We have demonstrated that in winter Helsinki, black cells generate considerably more electricity than traditional cells even though both cells have identical efficiency values," she adds.

In the near future, the goal of the team is to apply the technology to other cell structures - in particular, thin and multi-crystalline cells.

"Our record cells were fabricated using p-type silicon, which is known to suffer from impurity-related degradation. There is no reason why even higher efficiencies could not be reached using n-type silicon or more advanced cell structures," Savin predicts.

The development of the cells fabricated last year will continue in the upcoming "BLACK" project, supported by the European Union, in which Professor Savin together with her team will develop the technology further in cooperation with industry.

"The surface area of the best cells in the study was

already 9 cm<sup>2</sup>. This is a good starting point for upscaling the results to full wafers and all the way to the industrial scale."

**More information:** 22.1% efficient black silicon solar cells with interdigitated back-contacts. Hele Savin, Päivikki Repo, Guillaume von Gastrow, Pablo Ortega, Eric Calle, Moises Garín and Ramon Alcubilla. *Nature Nanotechnology*. DOI: [10.1038/nnano.2015.89](https://doi.org/10.1038/nnano.2015.89)

Provided by Aalto University

APA citation: Efficiency record for black silicon solar cells jumps to 22.1 percent (2015, May 18) retrieved 22 September 2019 from <https://phys.org/news/2015-05-efficiency-black-silicon-solar-cells.html>

*This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.*