


Image: Compact AIS antenna

January 20 2016

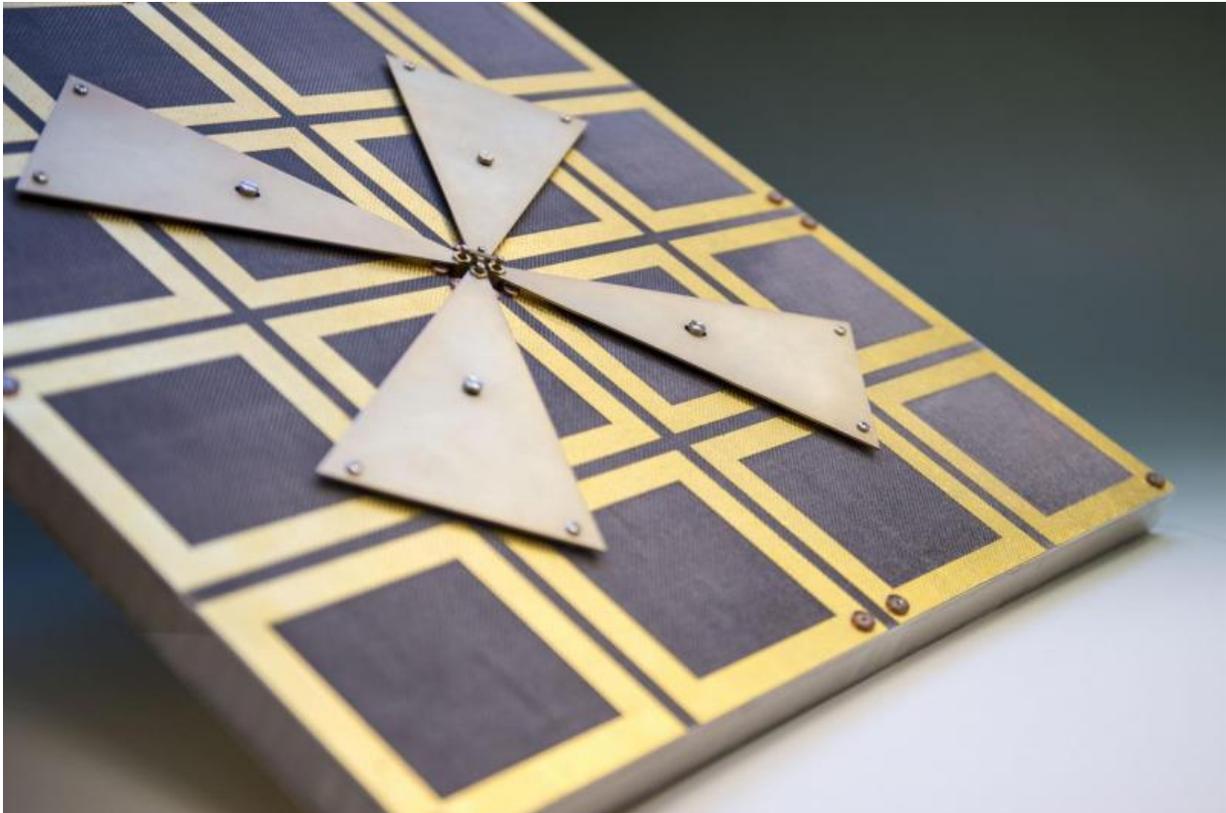

Credit: ESA–G. Porter, CC BY-SA 3.0 IGO

What might look like an abstract artwork is actually a novel antenna, small enough for a minisatellite, to track global ship traffic from orbit.

Commercial vessels are mandated to transmit Automatic Identification System (AIS) signals, which are used to track maritime traffic – the

ocean-going equivalent of [air traffic control](#). The system relies on VHF radio signals with a horizontal range of just 40 nautical miles (74 km), useful within coastal zones and on a ship-to-ship basis, but leaving open ocean traffic largely uncovered.

However, in 2010, ESA fitted an experimental [antenna](#) to Europe's Columbus module of the International Space Station, demonstrating for the first time that AIS signals could also be detected from up in orbit, opening up the prospect of global ship tracking from space.

"Based on our testing, this new prototype design offers a four-fold increase in ship detection performance," explains ESA antenna specialist Nelson Fonseca, overseeing the project.

"The AIS detection system on Columbus employs a low-gain 'whip' antenna, receiving signals within a very broad beam, with corresponding potential for signal overlap and interference.

"This antenna design combines higher-gain with a more reduced footprint, allowing more of a focus on regions of highest interest, and can also discriminate between polarisations, increasing the likelihood of detection for any individual AIS signal within the antenna field of view."

In addition, clever engineering has shrunk the overall antenna size to a size where up to five could be hosted on a single cubic-metre minisatellite.

"Despite its name, VHF is quite a low wavelength in space terms, implying a bulky antenna of about 1 m across and half-a-metre thick to operate ideally at that frequency," Nelson adds.

"But the patterned square-shaped structure on the underlying face of our antenna changes the signal behaviour, enabling us to shrink the design to

50 cm width and 3 cm thickness – making it suitable for hosting on a smaller platform."

The antenna was developed through ESA's ARTES Advanced Research in Telecommunications Systems – Advanced Technology programme with Italian companies CGS as prime contractor and MVG as subcontractor in charge of the electrical design.

"CGS and MVG are highly interested in moving forward with the optimisation and environmental qualification of this outstanding antenna element," explains Andrea Di Cintio, managing the project at CGS. "The next step will be to identify a specific mission and then optimise the design and qualification accordingly."

"Significant reduction of antenna dimensions and weight without compromising electrical performance was challenging," adds Andrea Giacomini, lead antenna designer at MVG. "It required a radical change in the design and validation approach. We are proud to have been involved."

Provided by European Space Agency

Citation: Image: Compact AIS antenna (2016, January 20) retrieved 18 April 2024 from <https://phys.org/news/2016-01-image-compact-ais-antenna.html>

This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.