


Simpler interferometer can fine tune even the quickest pulses of light

July 11 2018

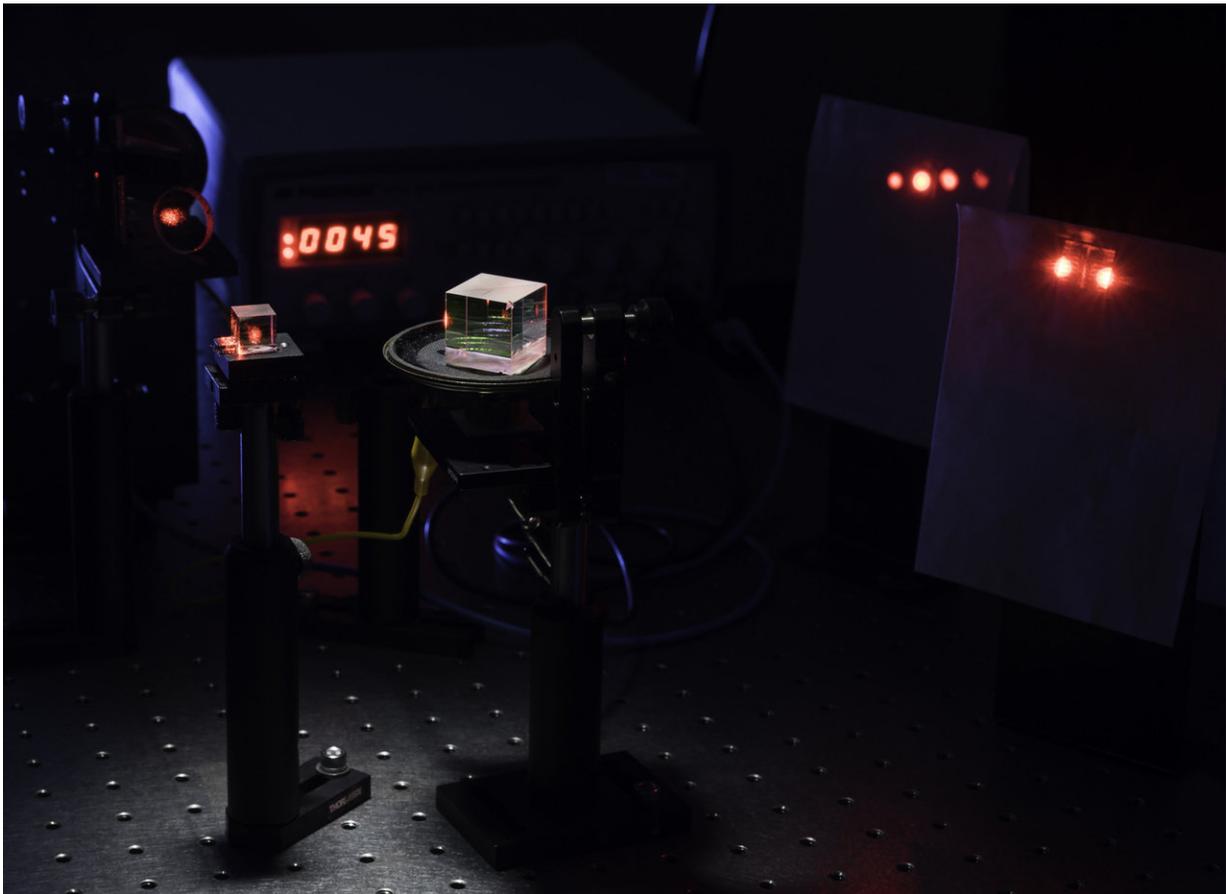

A new device designed by optics professor Chunlei Guo and PhD student Billy Lam is a 'revolutionary step forward' for characterizing the properties of laser beams in a much more reliable and powerful way than traditional interferometers. Credit: J. Adam Fenster/University of Rochester

If you want to get the greatest benefit from a beam of light—whether to detect a distant planet or remedy an aberration in the human eye—you need to be able to measure its beam front information.

Now a University of Rochester research team has devised a much simpler way to measure beams of [light](#)— even powerful, superfast pulsed laser beams that require very complicated devices to characterize their properties.

The new device will give scientists an unprecedented ability to fine tune even the quickest pulses of light for a host of applications, says Chunlei Guo, professor of optics, who has used [femtosecond](#) pulsed laser beams to treat metal surfaces in remarkable ways. And it could render traditional instruments for measuring light beams obsolete.

"This is a revolutionary step forward," says Guo. "In the past we've had to characterize [light beams](#) with very complicated, cumbersome interferometric devices, but now we can do it with just one optical cube. It is super compact, super reliable, and super robust."


The device, developed by Guo and Billy Lam, a Ph.D. student in his lab, is described in *Nature Light: Science and Applications*. Called a wedged reversal shearing interferometer, it consists of a prism cube, assembled from two right-angle prisms.

-The cube has two angled entrances and splits the [beam](#) into two parts.


When the beam exits the cube, the reflected light from the left portion of the beam and the transmitted light from the right portion of the beam are emitted from one face of the cube. Conversely, the transmitted light from left portion of the beam and reflected light from the right portion are emitted from another face of the cube.

This creates an extremely stable "Interference" pattern for Guo and his team to measure all the key spatial characteristics of a light beam- its amplitude, phase, polarization, wavelength, and, in the case of pulsed beams, the duration of the pulses. And not just as an average along the entire beam, but at each point of the beam.

This is especially important in imaging applications, Guo says. "If a beam is not perfect, and there is a defect on the image, it's important to know the defect is because of the beam, and not because of a variation in the object you are imaging," Guo says.

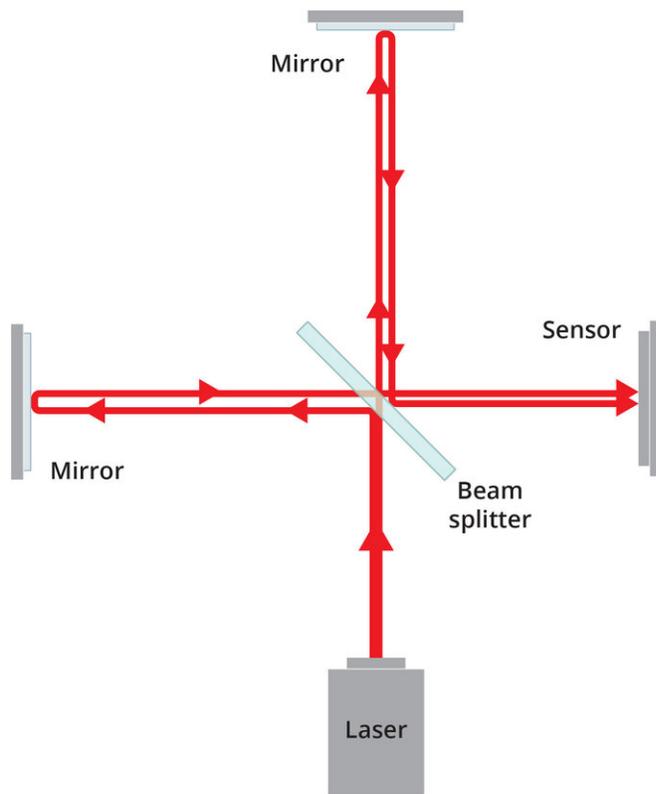

Traditional interferometer

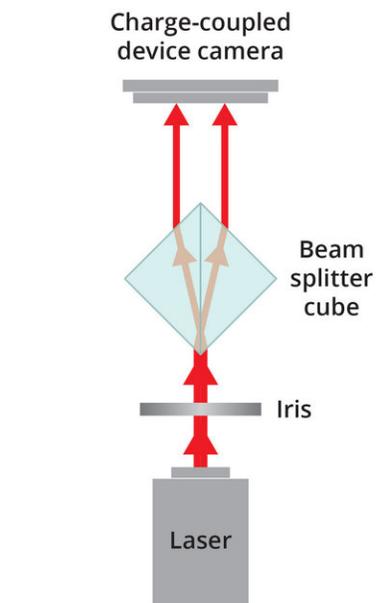

Wedge reversal shearing interferometer

At left is the basic design of a traditional interferometer, and at right the more compact design of the interferometer created in the lab of optics professor

Chunlei Guo. This new wedge reversal shearing interferometer has the added advantage of being able to measure the beam front information or wave front of powerful, superfast pulsed laser beams, Credit: University of Rochester illustration / Michael Osadciw

"Ideally, you should have a perfect beam to do imaging. And if you don't, you better know it, and then you can correct your measurements. Ultrafast lasers are key for recording dynamic processes, and having an extremely simple but robust device to characterize ultrafast or any type of laser beams are surely important."

Albert Michaelson demonstrated the first interferometer in the 1880s, using a [beam splitter](#) and two mirrors. The core principles remain the same in interferometers used today.

The beam splitter sends the split light on different optical paths towards the mirrors. The mirrors then reflect each split beam back so they recombine at the beam splitter. The different paths taken by the two split beams causes a phase difference which creates an interference fringe pattern. This pattern is then analyzed by a detector to evaluate the wave characteristics.

This approach has worked reasonably well for characterizing continuous wave laser beams because they have a long "coherence" time, allowing them to interfere even after being split, sent along two paths of different lengths, and then recombined, Guo says.

However, given the short duration of a femtosecond pulsed laser beam—about a millionth of a billionth of a second—Simple interferometer like the shear plate, where the beams reflected from the front and back surface interfere, no longer works." Guo says.

Femtosecond pulsed [laser beams](#) would quickly lose their coherence along non-equidistant pathways of a typical interferometer.

The prism cube is designed in such a way to eliminate that problem, he says. The prism cube is the first single element interferometer that can characterize femtosecond or even shorter laser pulses.

Femtosecond laser pulses offer two advantages. Their incredibly short duration is comparable to the timescales at which "very many fundamental processes in nature occur," Guo says. Those processes include an electron moving around an atom's core, the "lattice" vibration of atoms and molecules, and the unfolding of biological proteins. So, femtosecond laser pulses provide researchers a tool to study and manipulate those processes.

Femtosecond laser pulses are also incredibly powerful. "The peak power of a [femtosecond laser pulse](#) in my laboratory is equivalent to the entire North American power grid," Guo says. That enables his lab to use the [laser](#) pulses to etch metal surfaces with new properties, so they become super water repellent or water attracting.

Provided by University of Rochester

Citation: Simpler interferometer can fine tune even the quickest pulses of light (2018, July 11) retrieved 24 April 2024 from

<https://phys.org/news/2018-07-simpler-interferometer-fine-tune-quickest.html>

<p>This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.</p>
--