


Another step closer to tunable liquids

12 September 2018

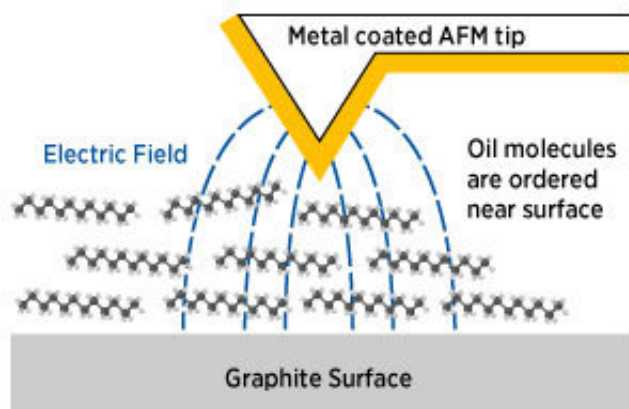

The sharp, metal-coated tip of an AFM can apply very high electric fields across liquid molecules (in this case an oil) right next to a surface. Credit: A*STAR Institute of Materials Research and Engineering

Using electrical fields to modify the properties of liquids in contact with a surface can be used in several applications, such as electrophoresis, where an electric current can separate molecules by size. Researchers at A*STAR have now developed a technique for investigating the effect of electric fields on the properties of oil-based lubricants, that could lead to new applications in nanofluidics and nanotribology.

When a liquid is confined between closely spaced surfaces, it may form ordered layers, leading to changes in the liquid's viscosity and molecular structure. Understanding the mechanical properties of these ordered layers is important for the development of nanotechnology devices and lubricants.

This led Sean O'Shea and Eugene Soh from the A*STAR Institute of Materials Research and Engineering to develop a technique for investigating whether the [mechanical properties](#) of liquids, such as flow or [surface](#) adhesion, can be tuned by applying external electric fields.

"These are the type of engineering questions to be addressed in order to develop 'smart' surfaces for applications that require electrically controllable adhesion, lubrication or flow," says O'Shea. "However, we first need to investigate the presence of any significant electrically induced effects."

Studies so far have primarily used water or [ionic liquids](#) because their polar nature means they are significantly influenced by electric fields. However, the use of ionic liquids is expensive, so the researchers used the more conventional lubricants undecanol and tetradecane, which consist of long-chain hydrocarbons that provide thick ordered layers.

With a strong [electric field](#) between the tip of an [atomic force microscope](#) (AFM) and a graphite substrate submerged in the liquids, the researchers were able to produce highly ordered layers of hydrocarbons along the surface of the graphite. A feature of these ordered layers is that they give rise to oscillatory forces that can be measured by the AFM.

Although oscillatory forces were observed when no electric field was applied—indicating ordered layers in the liquid close to the surface—these forces appeared far less frequently when a strong electric field was applied across undecanol, and slightly less frequently in tetradecane.

But when the liquids were boiled at 140 degrees Celsius to remove the small amounts of water present in the oils, the oscillatory forces remained present even at high electric [field](#) strengths.

"Our work suggests that in addition to changes in molecule orientation, another mechanism, which arises from the presence of trace amounts of water, must be considered when electric fields are applied," says O'Shea. "This represents another step closer to controllable lubrication and/or [liquid](#) flow on surfaces."

More information: Eugene J. H. Soh et al. Effect

of Electric Field and Trace Water on Confined
Undecanol and Tetradecane, *The Journal of
Physical Chemistry C* (2018). DOI:
[10.1021/acs.jpcc.7b09752](https://doi.org/10.1021/acs.jpcc.7b09752)

Provided by Agency for Science, Technology and
Research (A*STAR), Singapore
APA citation: Another step closer to tunable liquids (2018, September 12) retrieved 18 January 2021
from <https://phys.org/news/2018-09-closer-tunable-liquids.html>

This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.