


# New efficiency record set for perovskite LEDs

November 5 2018

---

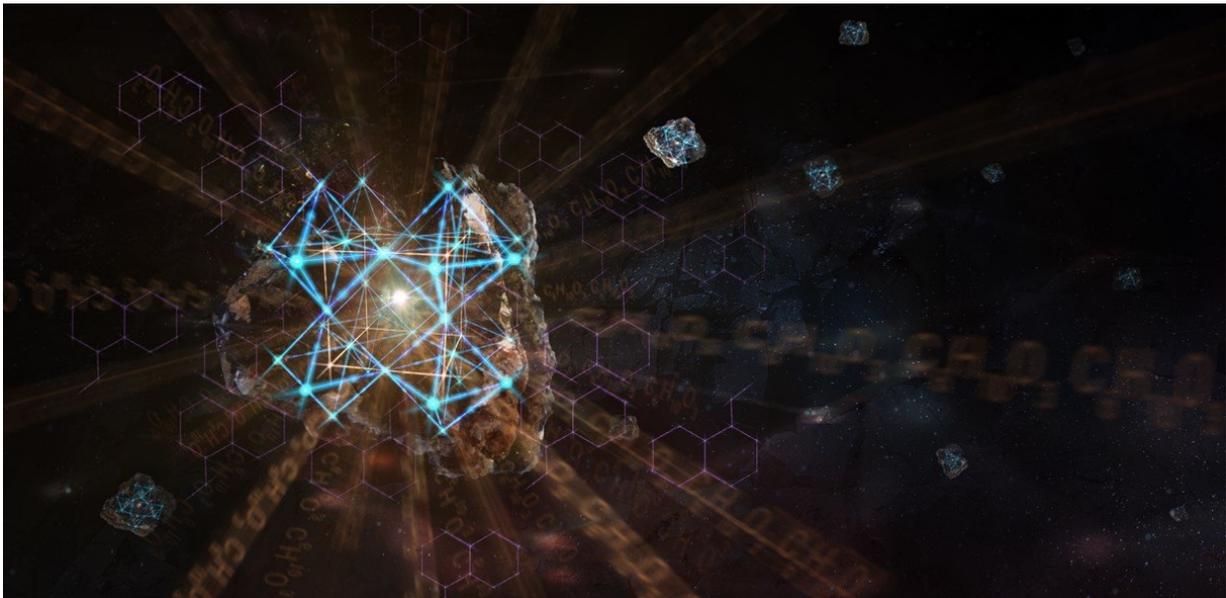

Artistic impression of the perovskite-polymer heterostructure used in LEDs.  
Credit: University of Cambridge

Researchers have set a new efficiency record for LEDs based on perovskite semiconductors, rivalling that of the best organic LEDs (OLEDs).

Compared to OLEDs, which are widely used in high-end consumer electronics, the perovskite-based LEDs, developed by researchers at the

University of Cambridge, can be made at much lower costs, and can be tuned to emit light across the visible and near-infrared spectra with high colour purity.

The researchers have engineered the perovskite layer in the LEDs to show close to 100% internal luminescence efficiency, opening up future applications in display, lighting and communications, as well as next-generation [solar cells](#).

These perovskite materials are of the same type as those found to make highly efficient solar cells that could one day replace commercial silicon solar cells. While perovskite-based LEDs have already been developed, they have not been nearly as efficient as conventional OLEDs at converting electricity into light.

Earlier hybrid perovskite LEDs, first developed by Professor Sir Richard Friend's group at the University's Cavendish Laboratory four years ago, were promising, but losses from the perovskite layer, caused by tiny defects in the crystal structure, limited their light-emission efficiency.

Now, Cambridge researchers from the same group and their collaborators have shown that by forming a composite layer of the perovskites together with a polymer, it is possible to achieve much higher light-emission efficiencies, close to the theoretical efficiency limit of thin-film OLEDs. Their results are reported in the journal *Nature Photonics*.

"This perovskite-polymer structure effectively eliminates non-emissive losses, the first time this has been achieved in a perovskite-based device," said Dr. Dawei Di from Cambridge's Cavendish Laboratory, one of the corresponding authors of the paper. "By blending the two, we can basically prevent the electrons and positive charges from recombining via the defects in the perovskite structure."

The perovskite-polymer blend used in the LED devices, known as a bulk heterostructure, is made of two-dimensional and three-dimensional perovskite components and an insulating polymer. When an ultra-fast laser is shone on the structures, pairs of electric charges that carry energy move from the 2-D regions to the 3-D regions in a trillionth of a second: much faster than earlier layered perovskite structures used in LEDs. Separated charges in the 3-D regions then recombine and emit light extremely efficiently.

"Since the energy migration from 2-D regions to 3-D regions happens so quickly, and the charges in the 3-D regions are isolated from the defects by the polymer, these mechanisms prevent the defects from getting involved, thereby preventing energy loss," said Di.

"The best external quantum efficiencies of these devices are higher than 20% at current densities relevant to display applications, setting a new record for perovskite LEDs, which is a similar efficiency value to the best OLEDs on the market today," said Baodan Zhao, the paper's first author.

While perovskite-based LEDs are beginning to rival OLEDs in terms of [efficiency](#), they still need better stability if they are to be adopted in consumer electronics. When [perovskite](#)-based LEDs were first developed, they had a lifetime of just a few seconds. The LEDs developed in the current research have a half-life close to 50 hours, which is a huge improvement in just four years, but still nowhere near the lifetimes required for commercial applications, which will require an extensive industrial development programme. "Understand the degradation mechanisms of the LEDs is a key to future improvements," said Di.

**More information:** Baodan Zhao et al, High-efficiency perovskite–polymer bulk heterostructure light-emitting diodes, *Nature*

*Photonics* (2018). [DOI: 10.1038/s41566-018-0283-4](https://doi.org/10.1038/s41566-018-0283-4)

Provided by University of Cambridge

Citation: New efficiency record set for perovskite LEDs (2018, November 5) retrieved 27 April 2024 from <https://phys.org/news/2018-11-efficiency-perovskite.html>

This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.