

# Addressing climate change at a major source—buildings

November 9 2018, by Patrick Ruch

---



Final assembly of the 10 kW prototype. Credit: Institut für Solartechnik, Hochschule für Technik Rapperswil HSR

Can silica gel desiccant packs, often found in shoe boxes and electronics, be the answer to our energy challenges for buildings? A four-year project proves yes, sort of.

According to the European Commission, heating and cooling in buildings and industry accounts for half of the EU's energy consumption, and fossil fuels generate 84 percent of this heating and cooling. The sector is expected to play a crucial role in CO<sub>2</sub> emissions reduction to meet the EU's climate goals by 2050. At the same time, the amount of [heat](#) wasted from industrial processes and buildings in the EU, including [data centers](#), is estimated to cover the EU's entire heating needs in residential and tertiary buildings.

## **What is waste heat?**


A few examples of waste heat include the heat that escapes from a home through the chimney, the heat that escapes from a car through the exhaust, and the hot air or water discarded from a kitchen stove, shower, dishwasher, washing machine or clothing dryer. In total, these waste heat flows are comparable to the total amount of electricity consumed by residential households.

In industrial processes, waste heat is mainly produced by power plants, combustion processes and manufacturing equipment. Overall, about 70 percent of all energy produced ends up as waste heat.

Often, this waste heat cannot be utilized because its temperature is unsuitable and it can be challenging to capture. Therefore, there is a demand for heat conversion technology in order to access the enormous potential of this essentially "free" heat. And if that wasn't challenging enough, this technology should also have minimal electricity consumption in order to alleviate the burden on the grid, which is associated with daily and seasonal variations in heating and cooling

demand.

## Bring on THRIVE

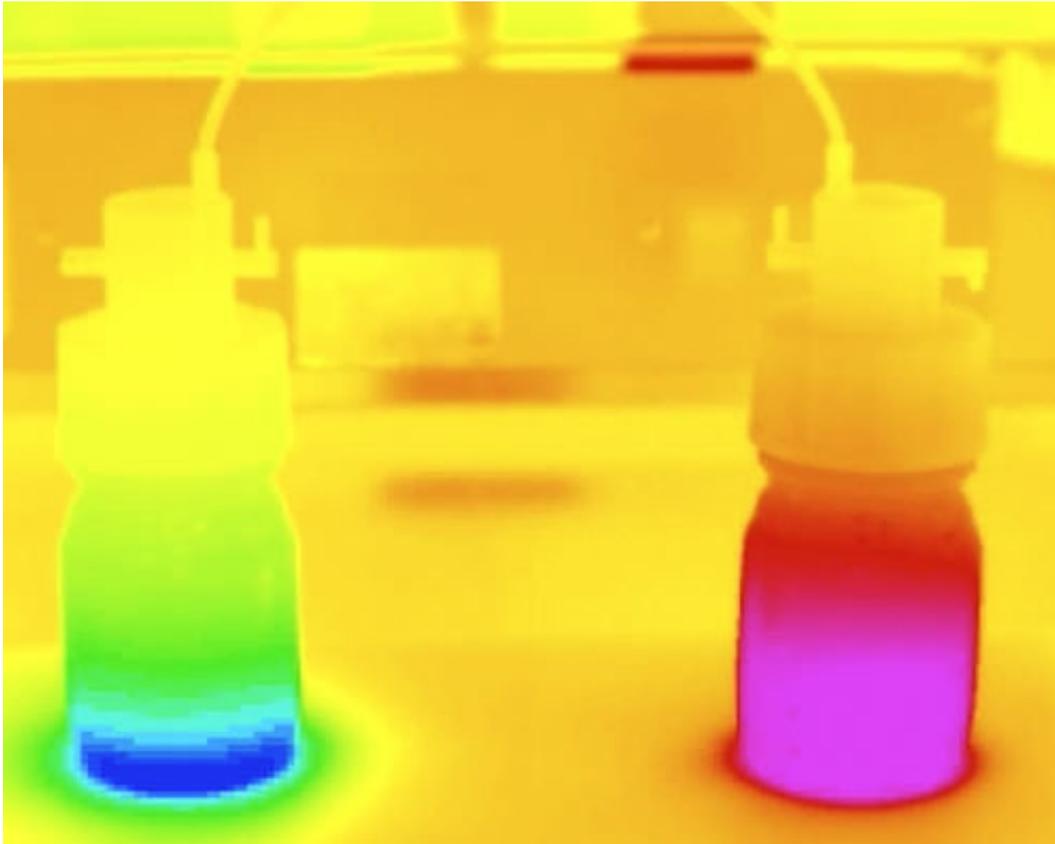

A demonstration with an infrared camera to show the temperature changes of a heat pump. Credit: IBM

Four years ago, scientists from IBM Research – Zurich, University of Applied Sciences Rapperswil (HSR), Empa, ETH Zurich, the School of Management and Engineering Vaud (HEIG-VD), Paul Scherrer Institute (PSI), and a number of additional collaborators teamed up to address this problem and came together in a project called THRIVE (Thermally Driven Heat Pumps for Substitution of Electricity and Fossil Fuels). The


research focused on adsorption heat pump (AdHP) technology, which relies on the use of adsorbent materials like silica gel, well known from those small "Do Not Eat" packs we often find in packaged goods.

Why silica gel? While it often gets tossed in the trash, it's actually a remarkable substance which can adsorb 40 percent of its own weight in moisture from its surroundings. In doing so, it produces a kind of suction effect that can be used to pump heat much like a conventional air conditioner, but without using electricity. One application of this technology is in data centers to harness waste heat from hot-water cooled high-performance servers to produce cool air to cool power supplies and data storage in the same data center, essentially enabling data centers to cool themselves with their own waste heat.

## **The results are in**

On 8 November, after 47 months of research, we reported our final results.

Besides cooling data centers and other [industrial processes](#) HEIG-VD identified promising applications for AdHPs to augment efficiency and capacity in district heating grids as well as lower emissions and energy costs for households. Based on the heating and cooling potentials of AdHPs in four such application scenarios, PSI projected 4-9 percent lower total energy use in 2050 for the stationary energy sector in Switzerland of AdHPs making use of available waste heat for industries and households, which according to the Paul Scherrer Institute (PSI) have the potential for 3-6 percent lower total energy use in 2050 in Switzerland.

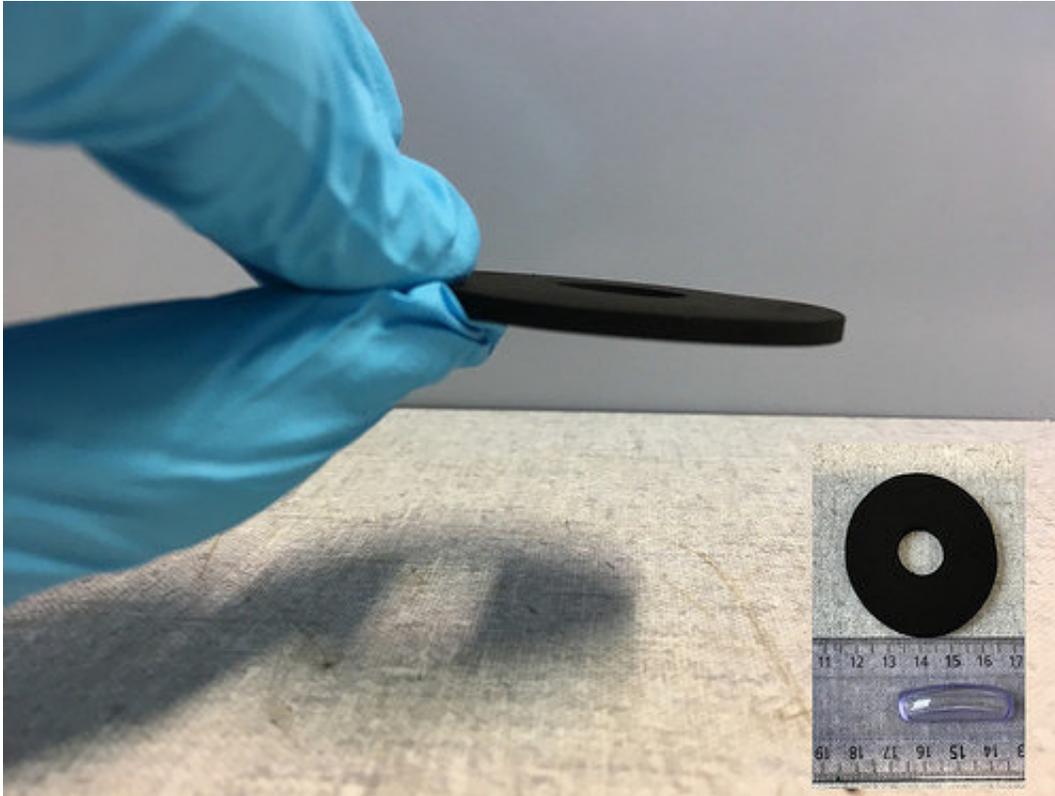

Shaped, monolithic, activated carbon discs produced at Empa. Credit: Lukas Huber, Empa

In THRIVE, several technical milestones were achieved to advance adsorption heat pump technology.

Instead of silica gel, Empa scientists developed a new type of monolithic activated carbon adsorbent, similar to charcoal, that can be molded and machined into arbitrary shapes to fit into heat exchangers for AdHPs. The material provided a 3.8x higher cooling power per unit mass compared to silica gel for regeneration by [waste heat](#) at 60 degrees C.

Further, scientists from IBM Research and ETH Zurich developed new methods to characterize adsorbents in action and used them to reveal the rate-limiting bottleneck in state-of-the-art adsorption heat exchangers

with just a few cm<sup>2</sup> of material. A framework to predict the geometry of optimally shaped adsorbents was developed, and adsorbent coatings were structured accordingly to provide a threefold improvement in adsorption rate compared to unstructured coatings. These structured adsorbents are capable of supporting a cooling power of 5 kW for each m<sup>2</sup> of adsorption heat exchanger area.

Together, materials and structural improvements can enhance the power density of adsorption heat exchangers by up to a factor of 10. This translates to substantially reduced cost of future AdHPs, making them overall economically, technologically and environmentally superior to other approaches for many applications

To prove that the approach also works at larger scale, HSR scientists built a test rig equipped with a weighing scale in vacuum, capable of characterizing adsorption heat exchangers that produce a cooling power of up to 1.5 kW. For even larger systems, they also built a four-chamber adsorption heat pump system that delivers up to 10 kW of cooling power – that would meet the typical air-conditioning requirements of a single-family home in warm climates.

And finally, we developed a framework to design high-performance adsorption heat exchangers for industries with different requirements. This compact AdHP technology is being further developed for data center cooling and a [follow-up project](#) is already underway in which AdHPs are evaluated as heat transformers in thermal grids. Further promising applications of compact AdHPs are for thermal management in cars and for gas separation, such as CO<sub>2</sub> capture – now that's a multi-pronged approach to improve energy efficiency, reduce cost and combat climate change.

**More information:** Jens Ammann et al. Sorption rate enhancement in SAPO-34 zeolite by directed mass transfer channels, *International*

*Journal of Heat and Mass Transfer* (2018). [DOI: 10.1016/j.ijheatmasstransfer.2018.10.065](https://doi.org/10.1016/j.ijheatmasstransfer.2018.10.065)

Jens Ammann et al. Characterization of transport limitations in SAPO-34 adsorbent coatings for adsorption heat pumps, *International Journal of Heat and Mass Transfer* (2018). [DOI: 10.1016/j.ijheatmasstransfer.2018.09.053](https://doi.org/10.1016/j.ijheatmasstransfer.2018.09.053)

Torsten Wilde et al. CoolMUC-2: A supercomputing cluster with heat recovery for adsorption cooling, *2017 33rd Thermal Measurement, Modeling & Management Symposium (SEMI-THERM)* (2017). [DOI: 10.1109/SEMI-THERM.2017.7896917](https://doi.org/10.1109/SEMI-THERM.2017.7896917)

*This story is republished courtesy of IBM Research. Read the original story [here](#).*

Provided by IBM

Citation: Addressing climate change at a major source—buildings (2018, November 9) retrieved 23 April 2024 from <https://phys.org/news/2018-11-climate-major-sourcebuildings.html>

This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.