


The influence of magnetic fields on thin film structures

December 18 2018

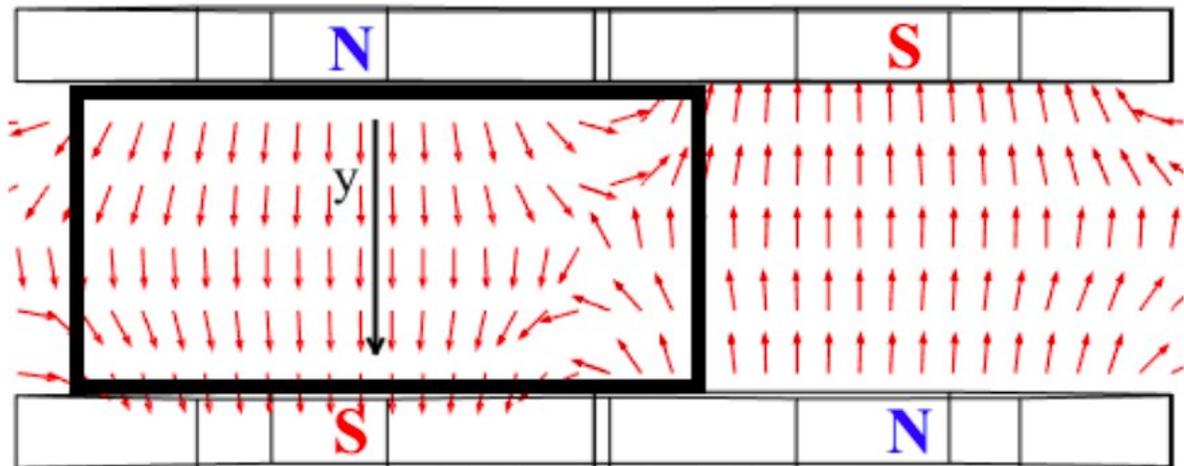

Visualization of a magnetic field between permanent magnets at the location of the substrate for the deposition of NiFe/IrMn film thin-film structure. Credit: Valeria Rodionova

A team of scientists from Immanuel Kant Baltic Federal University, together with their colleagues from Russia, Japan, and Australia, have studied the influence of inhomogeneous magnetic fields applied during the fabrication process of thin-film structures made from nickel-iron and iridium-manganese alloys. These systems can be used in various types of magnetic field sensors. The results are published in the *Journal of Magnetism and Magnetic Materials*.

Magnetic materials are divided into several types depending on their reaction on an external magnetic field. For example, diamagnetic materials become magnetized in the opposite direction to the external field, while paramagnetic ones acquire the magnetic moment with the same direction as that of the field. Two more classes of [magnetic materials](#)—ferromagnetic and antiferromagnetic—are different, because they are able to preserve [magnetic properties](#) even in the absence of an external field. Ferromagnetic materials possess a remnant magnetic moment and can be used as [permanent magnets](#), while the [magnetic moment](#) of antiferromagnetic materials is equal to zero in the absence of a magnetic field due to magnetic moments of sublattices that have opposite directions and cancel each other.

A typical phenomenon for the [ferromagnetic materials](#) is a [magnetic hysteresis](#), i.e. a change in the intrinsic magnetic field strength of a ferromagnet upon increase or decrease of an [external magnetic field](#) strength. A hysteresis loop of a ferromagnetic material is usually symmetrical over the point of origin. However, for materials that consist of two thin layers (an anti- and a ferromagnetic one) the hysteresis loop can be shifted over the origin point. This phenomenon is called the exchange bias, and is caused by exchange coupling between a ferromagnetic material with an antiferromagnetic one.

IKBFU physicists studied how the inhomogeneous magnetic field, applied during fabrication of thin films made from nickel-iron (NiFe) and iridium-manganese (IrMn), influence its properties.. The samples of thin films were made by the magnetron sputtering method. In this technology, a target (a piece of a metal that should be sputtered) is bombarded by the inert atoms (e.g. atoms of a noble gas).

"We've demonstrated that the presence of an inhomogeneous magnetic field during the manufacture process of thin film exchange-coupled structures changes their magnetization reversal mechanism. If

homogenous magnetic fields are used in this process, it leads to the classic shift of the hysteresis loop. Changes in the homogeneity of the magnetic field affect both the value of the loop shift and the shape of the loop in the NiFe/IrMn film structure. We demonstrated that a step-wise hysteresis loop can be obtained for the sample that was created in the area with the highest gradient of the magnetic field. The regularities we discovered will help increase the sensitivity of magnetic [field](#) detectors," says Valeria Rodionova, a co-author of the work, candidate of Physico-Mathematical Sciences, and the Head of the Laboratory for New Magnetic Materials of IKBFU.

More information: K. Gritsenko et al, Inhomogeneous magnetic field influence on magnetic properties of nife/irmn thin film structures, *Journal of Magnetism and Magnetic Materials* (2018). [DOI: 10.1016/j.jmmm.2018.10.013](#)

Provided by Immanuel Kant Baltic Federal University

Citation: The influence of magnetic fields on thin film structures (2018, December 18) retrieved 19 September 2024 from <https://phys.org/news/2018-12-magnetic-fields-thin.html>

This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.
