

# Simple and low-cost crack-healing of ceramic-based composites

12 February 2019

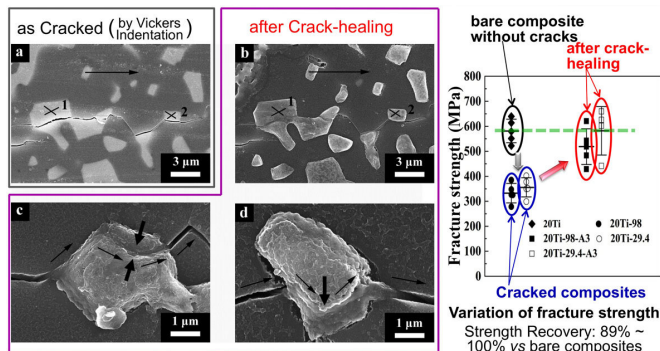


Fig. 1: Propagation of introduced crack in Al<sub>2</sub>O<sub>3</sub>/Ti composite (a) and healed cracks after anodization at room-temperature (b, c and d), where cracks at dispersed titanium (white particles) as well as part of cracks at Al<sub>2</sub>O<sub>3</sub> ceramics were filled by the formed titanium oxides. Fracture strength of cracked-composites was greatly decreased, but was almost fully recovered to its original level (right). Credit: Osaka University

A team of researchers at Osaka University demonstrated that cracks induced in composites consisting of alumina ( Al<sub>2</sub>O<sub>3</sub>) ceramics and titanium (Ti) as dispersed phase could be healed at room temperature, a world first. This ceramic healing method permits crack-healing even in a state in which ceramic parts are mounted on devices at a low cost and without using complicated high-temperature heat treatment processes that require significant amounts of energy.

Although various types of metal-ceramic composites have been researched and developed, their combination and fine structures were limited because of differences in ceramic-to-metal bonding types, chemical reactivity, and the [particle size](#) of commercially available metal powder.

This team overcame these restrictions by optimizing synthesis processes and sintering

processes. In 2018, they produced Al<sub>2</sub>O<sub>3</sub>/Ti composites with a percolation structure by controlling the content of added Ti and optimizing the particle size of metallic Ti powder and sintering processes, improving [fracture toughness](#) and electrical conductivity of Al<sub>2</sub>O<sub>3</sub>/Ti composites. (Osaka University Press Release, 28 Nov. 2018)

In this study, the researchers demonstrated that electrochemical anodization occurred in Al<sub>2</sub>O<sub>3</sub>/Ti composites. In addition, they developed a room-temperature healing method to heal cracks induced in Al<sub>2</sub>O<sub>3</sub>/Ti composites by using the anodization phenomenon without heat treatment, recovering the strength of the composites to their original level, a world first. The results of this research were published in the *Journal of the American Ceramic Society*.

To heal ceramics, crack-healing by chemical reaction (self-healing ability) has been studied, but a high-temperature treatment of 1,000° or higher was necessary to cause a chemical reaction and/or a diffusion reaction, so called re-sintering.

Moreover, because crack-repairing methods using resin adhesive (e.g. epoxy resin) or ceramic cement had a limit in adhesion between ceramics and resin or ceramic cement, it was difficult to fully recover the fracture strength to its original level.

In this study, the researchers achieved high electrical conductivity by homogeneously dispersing Ti, demonstrating [room-temperature](#) crack-healing in Al<sub>2</sub>O<sub>3</sub>/Ti composites by anodization without heat treatment and full recovery of fracture strength to its original level for the first time in the world.

In experiments using composites whose fracture strength lowered due to introduced cracks (graph in Figure 1), they demonstrated:

1. The fracture strength was recovered to its original level through anodization, and
2. The recovery was due to titanium oxides formed on the surface of dispersed titanium by anodic oxidation, which bridged cracked-surfaces and filled the crack, reducing stress concentration on the crack tip.

Senior author Tohru Sekino says, "The results of our study can also be applied to ceramic-based [composite](#) systems other than Al<sub>2</sub>O<sub>3</sub>/Ti composites as a new crack-healing method for ceramics, and a technique for ensuring the reliability of the ceramics themselves. Al<sub>2</sub>O<sub>3</sub>/Ti composites will be developed into multitasking materials that allow for multiple functions and applications according to their purpose and use."

**More information:** Shengfang Shi et al. Electrochemically Assisted Room-Temperature Crack Healing of Ceramic-Based Composites, *Journal of the American Ceramic Society* (2018). [DOI: 10.1111/jace.16264](https://doi.org/10.1111/jace.16264)

Provided by Osaka University

APA citation: Simple and low-cost crack-healing of ceramic-based composites (2019, February 12) retrieved 4 March 2021 from <https://phys.org/news/2019-02-simple-low-cost-crack-healing-ceramic-based-composites.html>

*This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.*