


On the way to printable organic light emitting diodes

10 July 2019

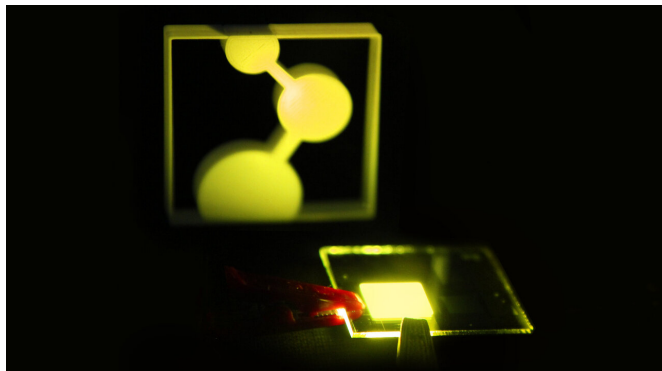

The first prototype of the OLED developed in Mainz, Germany, illuminates the MPI-P logo. Credit: MPI-P

Organic light-emitting diodes are components that no longer consist of compounds containing the semiconducting material gallium, but of so-called organic compounds in which carbon is a main component. Compared to conventional light-emitting diodes, however, the luminosity and lifetime of OLEDs is currently lower, which is why they represent a current field of research.

Scientists at the MPI-P led by group leader Dr. Gert-Jan Wetzelaer (Department of Prof. Paul Blom) have now developed a new OLED concept. Nowadays, OLEDs consist of various wafer-thin layers. Some layers are used to transport charges, while others are used to efficiently introduce electrons into the active [layer](#) in which light is generated. Thus, current OLEDs can easily consist of five to seven layers. The researchers have now developed an OLED which consists only of a single layer that is supplied with electricity via two electrodes. This simplifies the production of such OLEDs and paves the way for printable displays.

With their first prototype, the Mainz scientists were able to show that they can generate a brightness of emitted light of 10,000 candela/square meter

with a voltage of only 2.9 volts—this corresponds to about 100 times the luminosity of modern screens. Achieving such high luminosity at this low voltage is a record for current OLEDs. The researchers were also able to measure an external efficiency of 19%, which means that 19% of the [electrical energy](#) supplied is converted into light that comes out in the direction of the viewer. Also with this value, the OLED prototype can compete with current OLEDs consisting of five or even more layers.

In continuous operation, the researchers were able to measure a so-called LT50 lifetime of almost 2000 hours at a brightness equivalent of ten times that of modern displays. Within this time, the initial luminosity has dropped to 50% of its value.

"For the future, we hope to be able to improve the concept even further and thus achieve even longer lifetimes. This means that the concept could be used for industrial purposes," says Wetzelaer. The scientists hope that their newly developed single-layer concept—i.e. the reduced complexity of OLEDs—will contribute to the identification and improvement of the processes responsible for the reduction in lifetime.

The scientists are using a light-emitting layer based on so-called "Thermally Activated Delayed Fluorescence" (TADF). This [physical principle](#) has been known for several decades, but became the focus of OLED research about 10 years ago, when an efficient conversion of electrical energy into light was demonstrated in Japan. Since then, researchers have been working to produce TADF-based OLEDs, as these do not require expensive molecular complexes containing [rare-earth metals](#) that are being used in current OLEDs.

The researchers have now published their results in the renowned journal *Nature Photonics*.

More information: Naresh B. Kotadiya et al, Efficient and stable single-layer organic light-

emitting diodes based on thermally activated
delayed fluorescence, *Nature Photonics* (2019).
[DOI: 10.1038/s41566-019-0488-1](https://doi.org/10.1038/s41566-019-0488-1)

Provided by Max Planck Society

APA citation: On the way to printable organic light emitting diodes (2019, July 10) retrieved 26 January 2020 from <https://phys.org/news/2019-07-printable-emitting-diodes.html>

This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.