


Thermo-chemical power generation integrated with forced convection cooling

29 November 2019

Proposed Concept: Integration of Thermo-electrochemical Conversion with Forced Convection Cooling to Create a Self-sustaining Cooling System

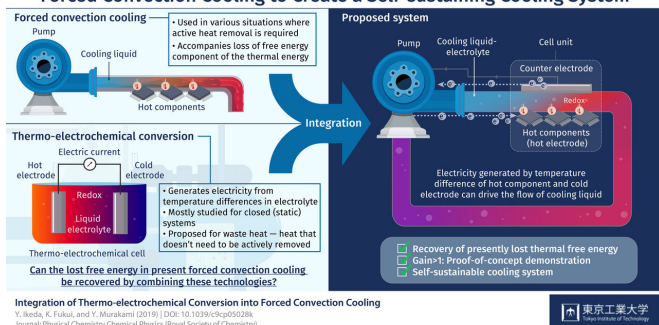

an energy portion that can be converted to an electric work. This issue concomitant with forced convection cooling has remained unaddressed despite the widespread use of forced convection cooling in the current world.

One specific method for converting wasted heat—the heat that doesn't need to be actively removed—into electrical energy through liquid [chemical reactions](#) has been studied for several decades. This method, called thermo-electrochemical conversion, involves the submergence of two electrodes held at different temperatures in a [liquid electrolyte](#) encased in a closed vessel, where a reversible reduction-oxidation ("redox") reaction occurs. This reaction generates an electric current through an external circuit. Research on thermo-electrochemical conversion has been mostly carried out for static fluids.

Schematic illustration of the concept on the integration of thermo-electrochemical conversion with forced convection cooling to create a self-sustaining cooling system. Credit: Tokyo Tech

Scientists at Tokyo Institute of Technology combine forced convection cooling with thermo-electrochemical energy conversion to create a self-sustaining liquid cooling system. A liquid electrolyte is circulated through a cell to cool a hot object, and the reversible chemical reaction in the cell generates a higher electric power than the hydrodynamic pump work required to drive the liquid through the cell. This technology resolves the longstanding unaddressed issue of the loss of free energy component of the thermal energy.

Active [cooling](#) is crucial in most modern technologies, ranging from microprocessors in data centers to turbines and engines. Forced [convection](#) cooling, which circulates a coolant fluid over the surface of a hot object, is effective for meeting such cooling requirements but demands a pumping power to send the coolant through the heat generating section. However, active cooling—fast removal of a large quantity of [thermal energy](#) in the [heat source](#) under a large temperature difference—promptly destroys the free-energy component of the thermal energy, which is

In this study, a team of researchers from Tokyo Institute of Technology integrated thermo-electrochemical conversion with forced convection cooling to partly recover the aforementioned free-energy portion, presently lost during forced-convection cooling, in the form of electric power. In the cell developed by these researchers, the electrolyte liquid is flown as a coolant between two parallel electrodes, one of which is a heat-releasing object to be cooled. The redox reaction occurring in the cell generates electricity; this electricity can be used to drive the coolant flow through the cell. This work delves into uncharted territory, as the concept and feasibility of self-sustaining liquid-cooling system have not been previously demonstrated.

The researchers carried out [detailed studies](#) to elucidate how the cooling and power generation works in this type of forced-flow thermo-electrochemical system. These novel findings are expected to provide a basic strategy for scaled-up future applications. "Although the prototype cell developed in this study was small and thus the

[power generation](#) performance was limited, this technology has much scope for improvement through optimizing the geometry of the liquid channel, electrode material, and the redox chemicals," remarks Prof. Yoichi Murakami, the principle investigator of this project.

Through further studies, this concept proposed by the researchers can hopefully find its application in near future, providing a new technological platform for forced convection cooling. "Through this approach, we can partially recover the free energy portion of the thermal [energy](#) currently lost during forced convection cooling, and this acquired electric power can be used for pumping the coolant in forced convection cooling," concludes Prof. Murakami.

More information: Yutaka Ikeda et al, Integration of thermo-electrochemical conversion into forced convection cooling, *Physical Chemistry Chemical Physics* (2019). [DOI: 10.1039/c9cp05028k](https://doi.org/10.1039/c9cp05028k)

Provided by Tokyo Institute of Technology

APA citation: Thermo-chemical power generation integrated with forced convection cooling (2019, November 29) retrieved 22 September 2020 from <https://phys.org/news/2019-11-thermo-chemical-power-convection-cooling.html>

This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.