


The most sensitive torque measuring device ever built

January 14 2020, by Bob Yirka

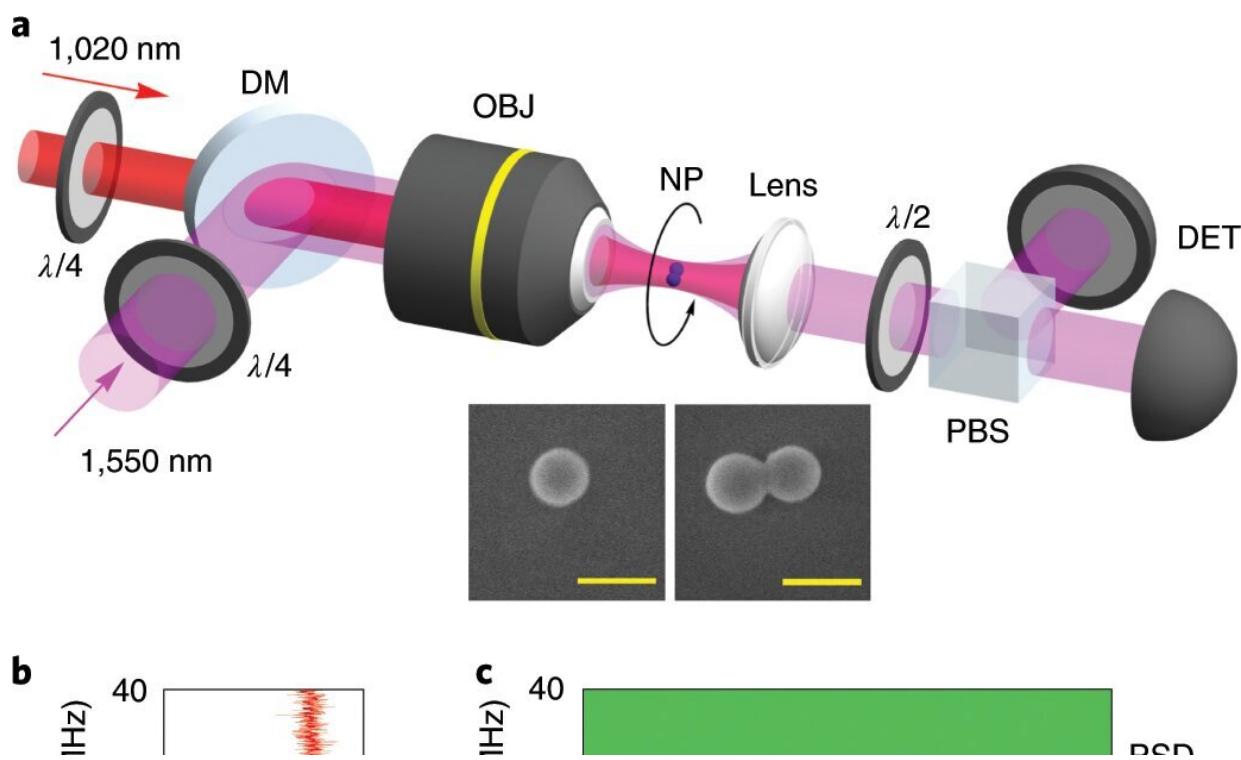

a, A silica nanoparticle (NP) is levitated in vacuum with a 500-mW, 1,550-nm laser tightly focused by an objective lens (OBJ) with a numerical aperture of 0.85. An additional 1,020-nm laser is used to apply an external torque on the nanoparticle. The polarization of each laser is controlled with a quarter waveplate ($\lambda/4$). After the collimation lens, the trapping laser is directed to detectors for monitoring the motion of the trapped nanoparticle. DM, dichroic mirror; $\lambda/2$, half waveplate; PBS, polarizing beam splitter; and DET, balanced photodetector. Inset: scanning electron microscope images of a silica nanosphere (left) and a silica nanodumbbell (right). The scale bar is 200 nm for both images.

b, A measured PSD of the rotation of an optically levitated nanoparticle at 10^{-4}

torr. The frequency of the PSD peak is twice the rotation frequency of the nanoparticle. c, A spectrogram (time trace) of the rotation PSD of an optically levitated nanoparticle recorded for 100 s. The first vertical line corresponds to the PSD shown in b. a.u., arbitrary units. Credit: *Nature Nanotechnology* (2020). DOI: 10.1038/s41565-019-0605-9

A team of physicists at Purdue University has built the most sensitive torque measuring device ever. In their paper published in the journal *Nature Nanotechnology*, the team describes their new device and outline how it might be used.

Torque is a twisting force that often leads to rotation. Devices built to measure [torque](#) in a system take many forms and come in many sizes. In recent years, scientists have been working on ways to downsize torque sensors with the goal of measuring very small amounts of torque. Tiny devices that use nanofabrication and cryogenic cooling have been developed to study such things as the Casimir effect and small-scale magnetism. Prior to this new effort, the most sensitive torque sensor had achieved a sensitivity of 2.9×10^{-24} N m Hz $^{-1/2}$ at millikelvin temperatures. The team at Purdue set themselves the goal of breaking that record.

The new [device](#) consisted of a silica nanoparticle suspended inside of a [vacuum chamber](#) by a 500-mW, 1,550-nm laser beam. The team applied torque to the nanoparticle by firing a pulsating, circularly polarized 1,020-nm laser beam at it for 100 seconds at a time. The researchers used a quarter waveplate to control polarization. The rotating waves in the electromagnet beam imparted a twisting action on the nanoparticle, making it spin at 300 billion rpm—the fastest man-made rotor ever built. The team was able to measure the amount of torque in the device by measuring how much the particle's spin speed changed during the on and

off cycles using an optical sensor. The researchers point out that their system, unlike others being developed, did not require intricate nanofabrication.

Using the device, the researchers were able to measure torque to a quadrillionth of a newton-meter—making it approximately 700 times as sensitive as the previous record holder. They claim that their device will be the first to measure vacuum friction—in which [quantum mechanics](#) suggests an object spinning in a vacuum experiences drag due to electromagnetic fields that constantly appear and disappear. The team also claims that the device could be used for nanoscale magnetism research and for studying the quantum geometric phase.

More information: Jonghoon Ahn et al. Ultrasensitive torque detection with an optically levitated nanorotor, *Nature Nanotechnology* (2020). [DOI: 10.1038/s41565-019-0605-9](https://doi.org/10.1038/s41565-019-0605-9)

© 2020 Science X Network

Citation: The most sensitive torque measuring device ever built (2020, January 14) retrieved 23 April 2024 from <https://phys.org/news/2020-01-sensitive-torque-device-built.html>

This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.