


A new strategy for the optimal electroreduction of CO₂ to high-value products

June 3 2020

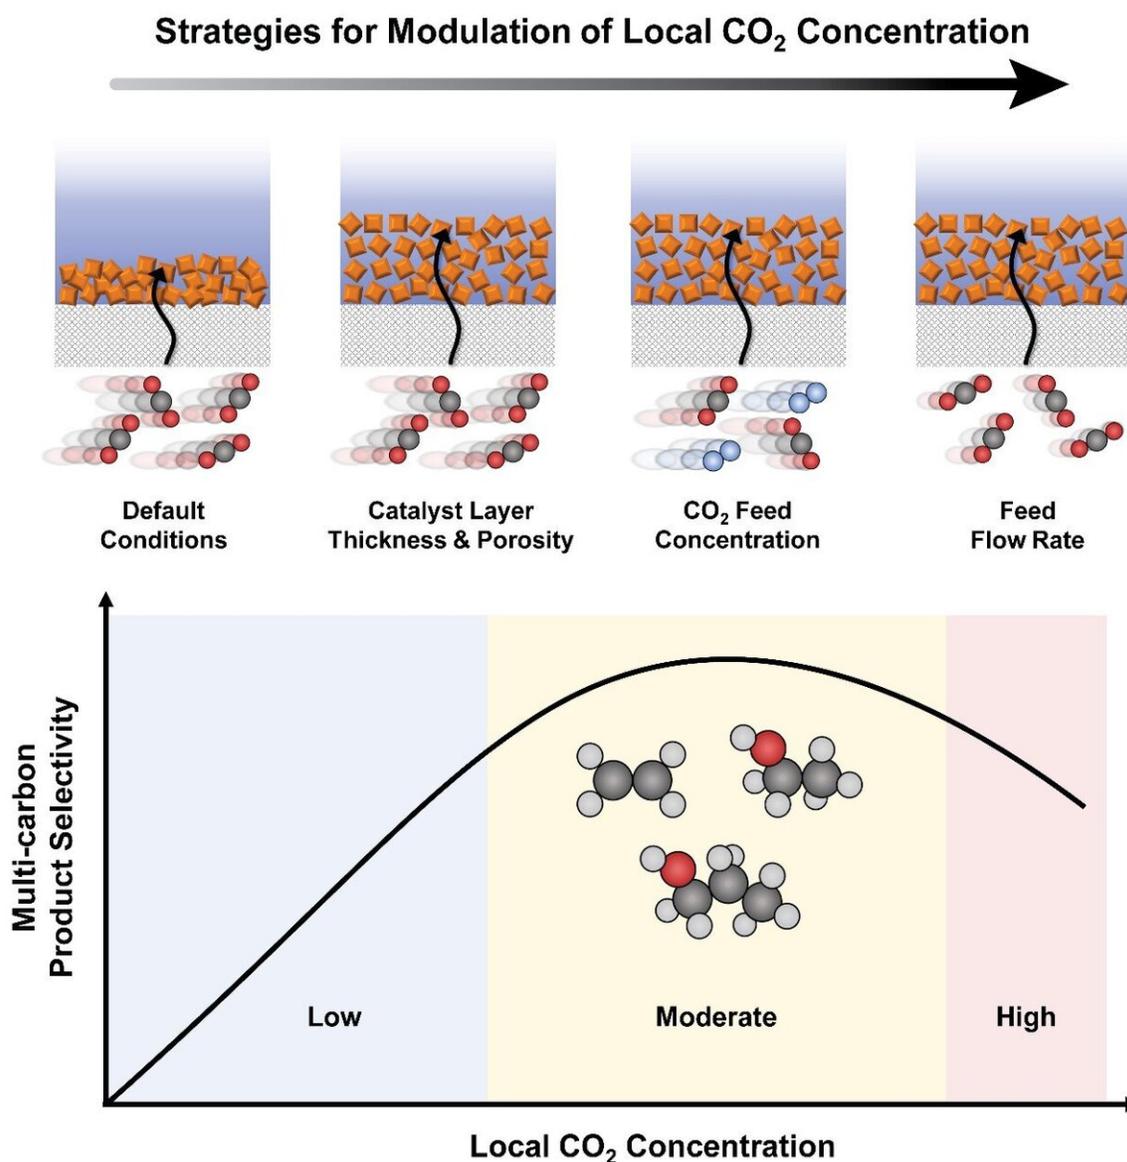

Three strategies employed in this study to modulate local CO₂ concentration in a catalyst layer (top) and the relationship between local CO₂ concentration and the selectivity for multi-carbon products (bottom). Note that maximum selectivity is achieved at a moderate local CO₂ concentration. Credit: The Korea Advanced Institute of Science and Technology (KAIST)

A KAIST research team presented three novel approaches for modulating local carbon dioxide (CO₂) concentration in gas-diffusion electrode (GDE)-based flow electrolyzers. Their study also empirically demonstrated that providing a moderate local CO₂ concentration is effective in promoting Carbon–Carbon (C–C) coupling reactions toward the production of multi-carbon molecules. This work, featured in the May 20th issue of *Joule*, serves as a rational guide to tune CO₂ mass transport for the optimal production of valuable multi-carbon products.

Amid global efforts to reduce and recycle anthropogenic CO₂ emissions, CO₂ electrolysis holds great promise for converting CO₂ into useful chemicals that were traditionally derived from fossil fuels. Many researches have been attempting to improve the selectivity of CO₂ for commercially and industrially high-value multi-carbon products such as ethylene, ethanol, and 1-propanol, due to their high energy density and large market size.

In order to achieve the highly-selective conversion of CO₂ into valuable multi-carbon products, past studies have focused on the design of catalysts and the tuning of local environment related to pH, cations, and molecular additives.

Conventional CO₂ electrolytic systems relied heavily on an alkaline

electrolyte that is often consumed in large quantities when reacting with CO_2 , and thus led to an increase in the operational costs. Moreover, the life span of a catalyst electrode was short, due to its inherent chemical reactivity.

In their recent study, a group of KAIST researchers led by Professor Jihun Oh from the Department of Materials Science and Engineering reported that the local CO_2 concentration has been an overlooked factor that largely affects the selectivity toward multi-carbon products.

Professor Oh and his researchers Dr. Ying Chuan Tan, Hakhyeon Song, and Kelvin Berm Lee proposed that there is an intimate relation between local CO_2 and multi-carbon product selectivity during electrochemical CO_2 reduction reactions. The team employed the mass-transport modeling of a GDE-based flow electrolyzer that utilizes copper oxide (Cu_2O) nanoparticles as model catalysts. They then identified and applied three approaches to modulate the local CO_2 concentration within a GDE-based electrolytic system, including 1) controlling the catalyst layer structure, 2) CO_2 feed concentration, and 3) feed flow rate.

Contrary to common intuition, the study showed that providing a maximum CO_2 transport leads to suboptimal multi-carbon product faradaic efficiency. Instead, by restricting and providing a moderate local CO_2 concentration, C–C coupling can be significantly enhanced.

The researchers demonstrated experimentally that the selectivity rate increased from 25.4% to 61.9%, and from 5.9% to 22.6% for the CO_2 conversion rate. When a cheap milder near-neutral electrolyte was used, the stability of the CO_2 electrolytic system improved to a great extent, allowing over 10 hours of steady selective production of multi-carbon products.

Dr. Tan, the lead author of the paper, said, "Our research clearly

revealed that the optimization of the local CO₂ concentration is the key to maximizing the efficiency of converting CO₂ into high-value multi-carbon products."

Professor Oh added, "This finding is expected to deliver new insights to the research community that variables affecting local CO₂ concentration are also influential factors in the electrochemical CO₂ reduction reaction performance. My colleagues and I hope that our study becomes a cornerstone for related technologies and their industrial applications."

More information: Ying Chuan Tan et al. Modulating Local CO₂ Concentration as a General Strategy for Enhancing C–C Coupling in CO₂ Electroreduction, *Joule* (2020). [DOI: 10.1016/j.joule.2020.03.013](https://doi.org/10.1016/j.joule.2020.03.013)

Provided by The Korea Advanced Institute of Science and Technology (KAIST)

Citation: A new strategy for the optimal electroreduction of CO₂ to high-value products (2020, June 3) retrieved 20 September 2024 from <https://phys.org/news/2020-06-strategy-optimal-electroreduction-co2-high-value.html>

This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.