

Determining the slenderization of wood pulp

December 17 2020

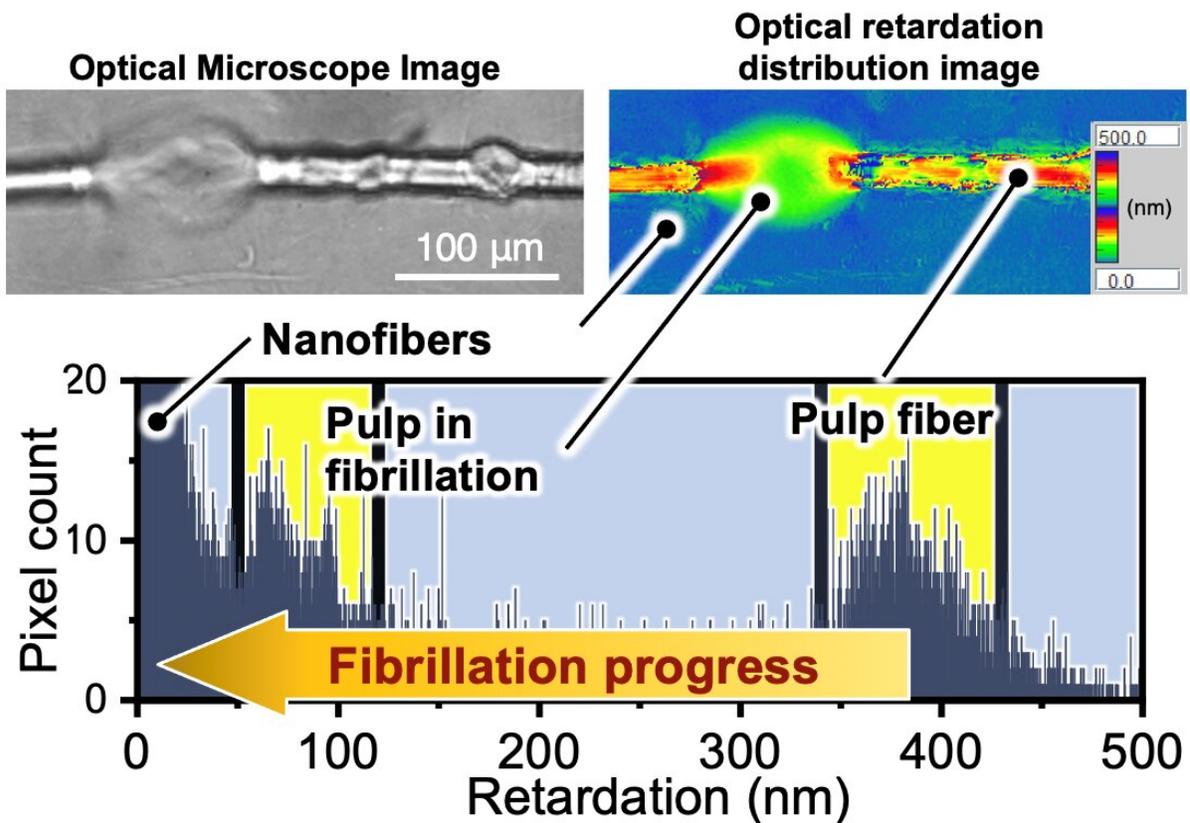


Figure 1. Pixel-resolved distribution analysis shows that the optical retardation decreases with increasing degree of pulp fibrillation. Credit: Osaka University

Researchers from the Institute of Scientific and Industrial Research at Osaka University have devised a new method to determine the degree of fibrillation in wood pulp. By taking advantage of the intrinsic optical

birefringence of cellulose, they were able to measure the morphology change through optical retardation distribution. This work may lead to clear grading and smart utilization of renewable biomass, cellulose nanofibers.

Cellulose, the primary structural component of most plants, has been harvested by humanity for millennia as an important biomaterial for clothing, paper, and [wooden structures](#). More recently, [cellulose nanofibers](#) have been produced, which have the advantage of various functionalities derived from the extended chain crystals that make up [cellulose](#), including optical birefringence. Birefringence occurs when the effective speed of light inside a material depends on its polarization; in this case, whether the light is polarized parallel or perpendicular to the polymer chains.

Now, a team of scientists at Osaka University has developed an optical analysis system that can directly quantify the degree of [fibrillation](#) of wood pulps. Fibrillation is the process of decreasing the bundling of cellulose molecules in micro-scale pulp fibers to form nanoscale fibers. Compared with painstakingly measuring fiber widths with an [electron microscope](#), this technique quickly and easily determines if the cellulose fibers are aligned or dispersed in random orientations. "Our system offers clear and quantifiable criteria for grading the quality of cellulose nanofibers," says first author Kojiro Uetani.

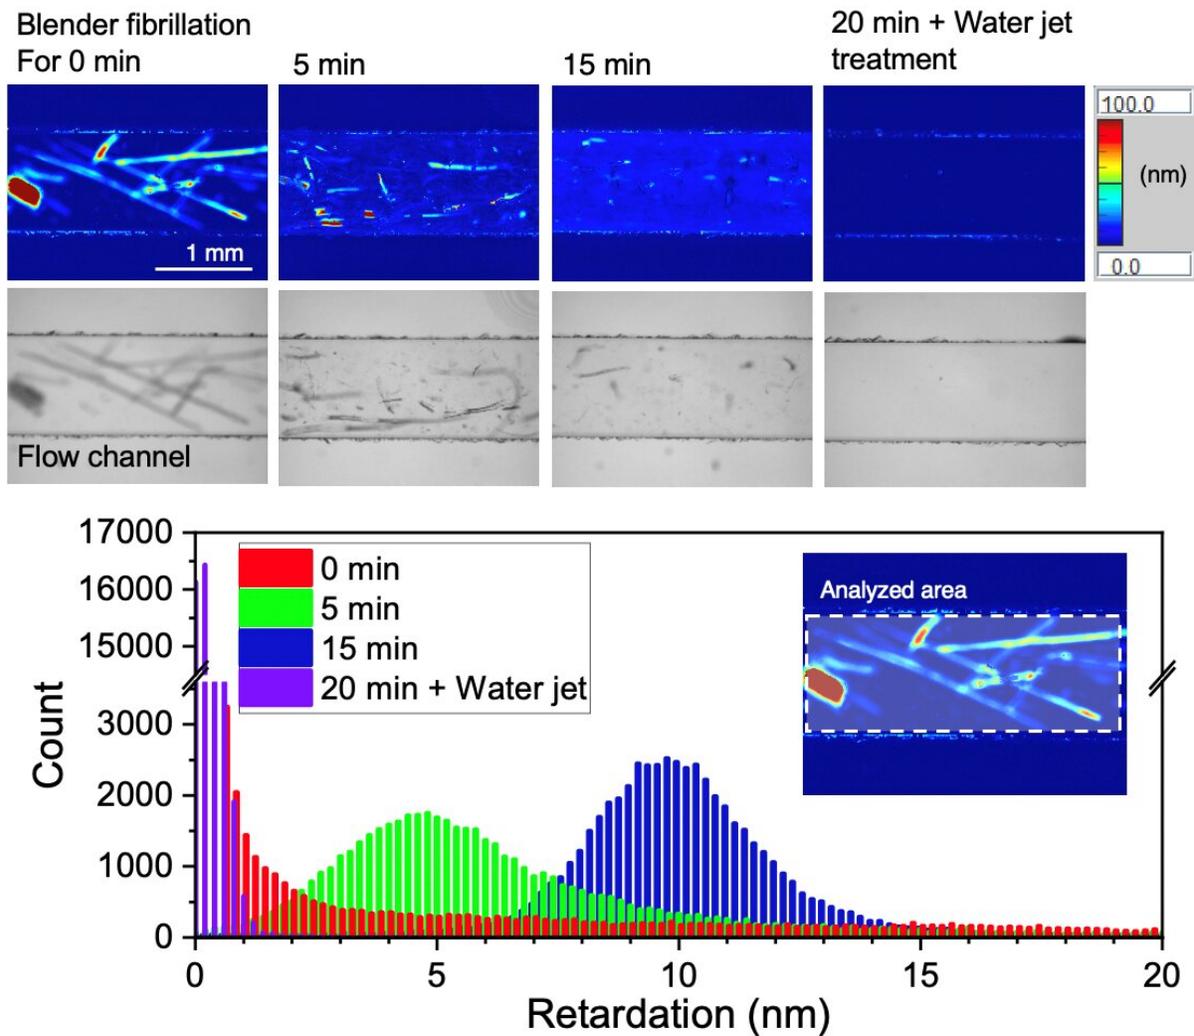


Figure 2. Distribution of optical retardation in pulp suspensions, which changes based on the degree of fibrillation. Credit: Osaka University

This is accomplished by observing [cellulose fibers](#) in a quartz flow cell with a birefringence microscope. The sample is illuminated from below with circularly polarized light, which has an electrical field orientation that rotates in space like a helix. Regions of the fibers with large birefringence will cause a larger optical retardation in the phase of the light. Using a birefringence microscope, the researchers were able to

record this value pixel-by-pixel. They found that both the average optical retardation and its standard deviation were correlated with the degree of fibrillation. Large retardation values were associated with intact pulp fibers, while smaller values were seen with balloon-like structure in fibrillating pulps, and very small values occurred with dispersed nanofibers.

"We hope to promote the precise structure control and advanced use of wood pulps and cellulose nanofibers," says senior author Masaya Nogi. In addition to the results of the article described above, the team has also confirmed that it is possible to automatically determine the degree of fibrillation of unknown pulp samples by deep learning of retardation images. This system is expected to lead to a clearer and more automatic definition of the degree of fibrillation by [artificial intelligence](#) (AI) in the future and will become a key analysis technology for indicating the quality of [pulp](#) materials and cellulose nanofibers.

More information: Kojiro Uetani et al. Direct determination of the degree of fibrillation of wood pulps by distribution analysis of pixel-resolved optical retardation, *Carbohydrate Polymers* (2020). [DOI: 10.1016/j.carbpol.2020.117460](#)

Provided by Osaka University

Citation: Determining the slenderization of wood pulp (2020, December 17) retrieved 20 September 2024 from <https://phys.org/news/2020-12-slenderization-wood-pulp.html>

<p>This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.</p>
--