


# A new study looks for the cortical conscious network

August 26 2016, by Ramat Gan

---

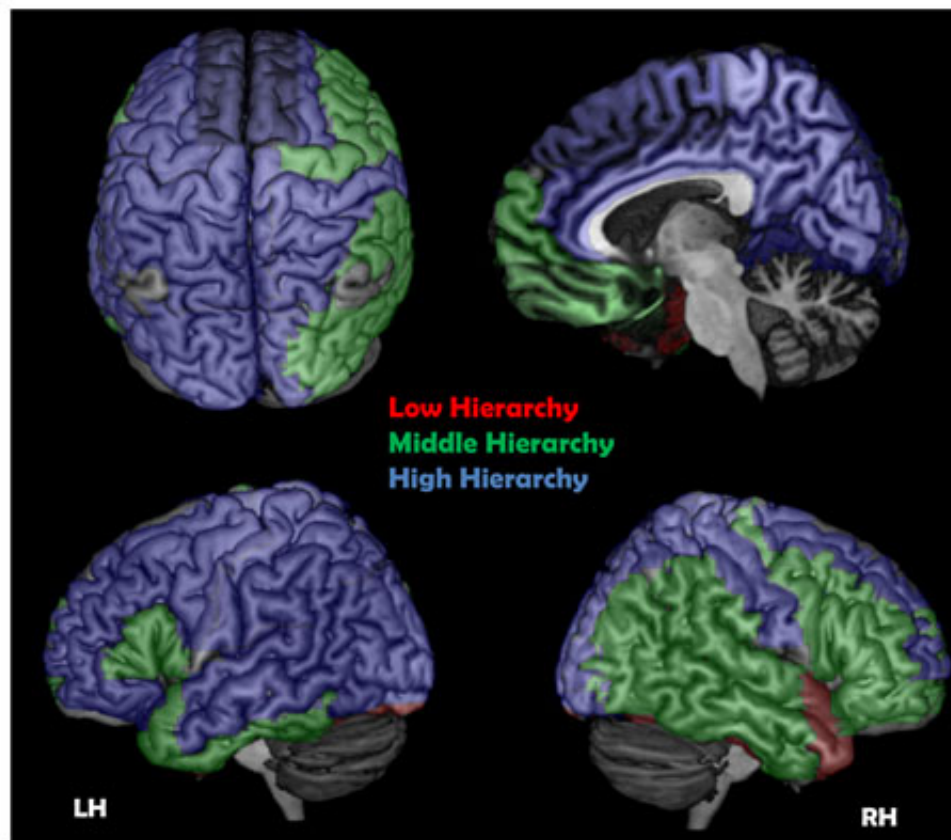

Credit: the hierarchy of the human cortex, Figure 4, *New J. Phys.* 18 (2016) 083013.

New research published in the *New Journal of Physics* tries to decompose the structural layers of the cortical network to different

hierarchies enabling to identify the network's nucleus, from which our consciousness could emerge.

The [brain](#) is a very complex network, with approximately 100 billion neurons and 100 trillion synapses between the neurons. In order to cope with its enormous complexity and to understand how brain function eventually creates the conscious mind, science uses advanced mathematical tools. Ultimately, scientists want to understand how a global phenomenon such as consciousness can emerge from our neuronal network.

A team of physicists from Bar Ilan University in Israel led by Professor Shlomo Havlin and Professor Reuven Cohen used network theory in order to deal with this complexity and to determine how the structure of the human cortical network can support complex data integration and [conscious activity](#). The gray area of the human cortex, the neuron cell bodies, were scanned with MRI imaging and used to form 1000 [nodes](#) in the cortical network. The white matter of the human cortex, the neuron bundles, were scanned with DTI imaging, forming 15,000 links or edges that connected the network's nodes. In the end of this process, their network was an approximation of the structure of the human cortex.

Previous studies have shown that the human cortex is a network with small world properties, which means that it has many local structures and some shortcuts from global structures that connect faraway areas (similar to the difference between local buses and cross-country trains). The cortex also has many hubs, which are nodes that have a high number of links (like central stations), that are also strongly interconnected between themselves, making it easy to travel between the brain's information highways.

Nir Lahav, the lead author of the study, says, "In order to examine how the structure of the network can support global emerging phenomena

like consciousness, we applied a network analysis called K-shell decomposition. This analysis takes into account the connectivity profile of each node, making it easy to uncover different neighborhoods of connections in the cortical network, which we called [shells](#)."

The most connected neighborhood in the network is termed the network's nucleus. Nir says, "In the process, we peel off different shells of the network to get the most connected area of the network, the nucleus. Until today, scientists were only interested in the network's nucleus, but we found that these different shells can hold important information about how the brain integrates information from the local levels of each node to the entire global network. For the first time, we could build a comprehensive topological model of the cortex."

This topological model reveals that the network's nucleus includes 20 percent of all nodes and that the remaining 80 percent are strongly connected across all of the shells. Interestingly, comparing this topology to that of other networks, such as the internet, noticeable differences are apparent. For instance, in internet network topology, almost 25 percent of the nodes are isolated, meaning they don't connect to any other shells but the nucleus. In the cortical network, however, there are hardly any isolated nodes. It seems that the cortex is much more connected and efficient than the internet.

Looking at all the shells of the cortical network, the authors were able to define the network's hierarchical structure and essentially model how information flows within the network. The structure revealed how shells of low connectivity are nodes that typically perform specific functions like face recognition. From there, the data is transferred to higher, more connected shells that enable additional data integration. This reveals regions of the executive network and working memory. With these areas, researchers can focus on task performance, for example.

The integrated information then 'travels' to the most connected neighborhood of nodes, the nucleus, which spans across several regions of the cortex. According to Nir, "It's an interconnected collective which is densely linked with itself and can perform global functions due to its great number of global structures, which are widespread across the brain."

Which global function might the nucleus serve? The authors suggest the answer is no less than consciousness itself.

"The connection between brain activity and consciousness is still a great mystery," says Nir. The main hypothesis today is that in order to create conscious activity, the brain must integrate relevant information from multiple areas of the network. According to this theory, led by Professor Giulio Tononi from the University of Wisconsin, if the level of integrated information crosses a certain limit, a new and emergent state is entered—consciousness. This model suggests that consciousness depends on both information integration and information segregation. Loosely speaking, consciousness is generated by a "central" network structure with a high capacity for information integration, with the contribution of sub-networks that contain specific and segregated information without being part of the central structure. In other words, certain parts of the brain are more involved than others in the conscious complex of the brain, yet other connected parts still contribute, working quietly outside the conscious complex.

The authors demonstrate how the nucleus and the shells satisfy all of the requirements of these recent consciousness theories. The shells calculate and contribute to [data integration](#) without actually being part of the conscious complex, while the nucleus receives relevant [information](#) from all other hierarchies and integrates it to a unified function using its global interconnected structure. The nucleus could thus be this conscious complex, serving as a platform for consciousness to emerge from the

network activity.

When the authors examined the different regions that make up the nucleus, they revealed that, indeed, these regions have been previously associated with conscious activities. For example, structures within the brain's midline, which form the majority of the [network](#)'s nucleus, were found to be associated with the stream of consciousness, and some researchers, like Professor Georg Northoff from the University of Ottawa, have suggested that these regions are involved with creating our sense of self.

"Now, we need to use this analysis on the whole brain, and not only on the cortex in order to reveal a more exact model of the brain's hierarchy, and later on understand what, exactly, are the neuronal dynamics that lead to such global integration and ultimately [consciousness](#)."

**More information:** Nir Lahav et al. K-shell decomposition reveals hierarchical cortical organization of the human brain, *New Journal of Physics* (2016). [DOI: 10.1088/1367-2630/18/8/083013](https://doi.org/10.1088/1367-2630/18/8/083013)

Provided by Bar Ilan University

Citation: A new study looks for the cortical conscious network (2016, August 26) retrieved 24 July 2024 from <https://phys.org/news/2016-08-cortical-conscious-network.html>

<p>This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.</p>
--