


Visualizing temperature transport: An unexpected technique for nanoscale characterization


November 17 2021

A New Way to Probe Thermal Transport Properties at the Nanoscale

Thermal transport properties of molecular junctions are difficult to examine due to a lack of suitable observation techniques

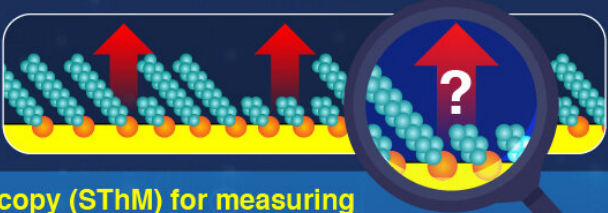


Scanning thermal microscopy (SThM) for measuring thermal transport properties in organic monolayers

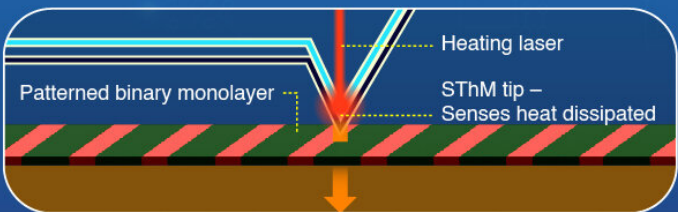

Heating laser
SThM tip – Senses heat dissipated
Patterned binary monolayer


Contact mode



- Senses direct heat flow
- Better for molecules of similar length

Accurate nanoscale thermal transport properties

Noncontact mode



- Senses radiation heat flow
- More sensitive for molecules of different lengths

Non-destructive topographic imaging

A combination of these complimentary modes offers a novel technique for studying the surface thermal properties of materials

Visualization of Thermal Transport Properties of Self-Assembled Monolayers on Au(111) by Contact and Noncontact Scanning Thermal Microscopy

Fujii et al. (2021) | *Journal of the American Chemical Society* | 10.1021/jacs.1c09757



Credit: Tokyo Tech

As devices continue to shrink, new challenges in their measurement and design present themselves. For devices based on molecular junctions, in which single molecules are bound to metals or semiconductors, we have a variety of techniques to study and characterize their electric transport properties. In contrast, probing the thermal transport properties of such junctions at the nanoscale has proven more challenging, and many temperature-related quantum phenomena in them remain poorly understood.

In a few studies, scientists managed to measure the thermal transport properties in [molecular junctions](#) at the nanoscale using a technique called scanning thermal microscopy (SThM). This method involves putting a very sharp metallic tip in contact with the target material and moving this tip throughout the material's surface. The tip, which is heated from behind using a laser, contains a thermocouple. This small device measures temperature differences, and so by balancing the heating of the tip caused by the laser with the tip's cooling caused by heat flowing into the target sample, it becomes possible to measure a material's thermal transport characteristics point by point.

In a recent study published in *Journal of the American Chemical Society*, scientists from Tokyo Tech reported a serendipitous yet important finding while using SThM. The team was employing a SThM technique to measure the thermal transport properties of self-assembled monolayers (SAMs). These samples contained alternating stripes of each of the three possible pairs among n-Hexadecanethiol, n-Butanethiol, and Benzenethiol. Besides employing the standard contact-based SThM

approach, the researchers tried using a non-contact regime as well, in which the tip of the scanning thermal microscope was kept above the sample without touching it. Unexpectedly, they realized this non-contact regime had some serious potential.

In the contact SThM regime, heat flows directly from the tip to the sample. By contrast, in the non-contact SThM regime, the only heat transfer between the tip and the sample occurs via [heat](#) radiation. As the team learned through experiments, while the contact regime is best for visualizing the thermal transport characteristics, the non-contact regime is much more sensitive to the actual length of the molecules "sticking out" from the substrate. Thus, the combination of the non-contact and contact regimes provides an all-new way of creating topographic and thermal transport images of a sample simultaneously.

Moreover, the non-contact approach has advantages over other well-established microscopy techniques, as Associate Professor Shintaro Fujii, lead author of the paper, explains: "The non-contact SThM approach is completely non-destructive, unlike other techniques like [atomic force microscopy](#), which does require contact between the scanning tip and the sample and thus has a mechanical impact that can damage soft organic materials."

Overall, the insight provided by this study will pave the way to novel technological advances and a deeper comprehension of materials at the nanoscale. "Our work not only is the first to provide thermal images of organic SAMs, but also provides a new technique for investigating thermal [transport](#) properties, which will be essential for thermal management in various types of nanodevices," concludes Fujii.

Let us hope this work helps scientists elucidate the many mysteries of thermal phenomena.

More information: Shintaro Fujii et al, Visualization of Thermal Transport Properties of Self-Assembled Monolayers on Au(111) by Contact and Noncontact Scanning Thermal Microscopy, *Journal of the American Chemical Society* (2021). [DOI: 10.1021/jacs.1c09757](https://doi.org/10.1021/jacs.1c09757)

Provided by Tokyo Institute of Technology

Citation: Visualizing temperature transport: An unexpected technique for nanoscale characterization (2021, November 17) retrieved 3 May 2024 from <https://phys.org/news/2021-11-visualizing-temperature-unexpected-technique-nanoscale.html>

This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.