


Introducing high-performance non-fullerene organic solar cells

August 31 2018

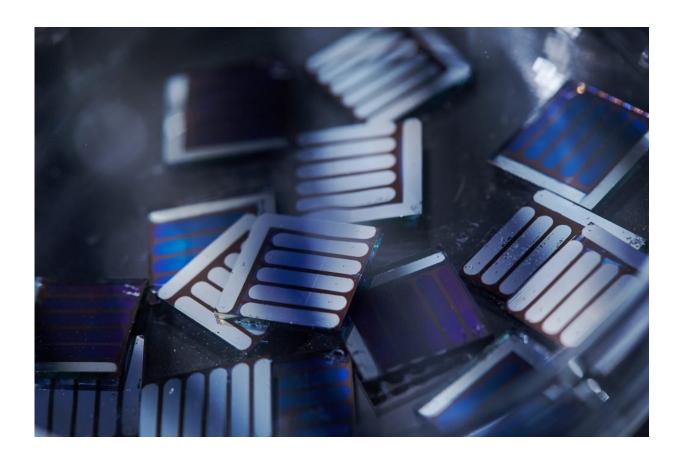

Non-fullerene polymer solar cells exhibit high performance and are easy to commercialize. Credit: UNIST

Organic solar cells (OSCs) has driven their efficiencies to above 10 percent to reach a viable level for commercialization. However, the




increase in the photoactive layer thickness has resulted in lower efficiency levels, which therefore brings much complex manufacturing process.

A research team, led by Professor Changduk Yang and his research team in the School of Energy and Chemical Engineering at UNIST, has introduced a novel method that can solve issues associated with the thickness of the photoactive layers in OSCs. In the study, the researchers succeeded in obtaining an efficiency of 12.01 percent in the organic solar cells, using a non-fullerance acceptor (IDIC) in the photoactive layer. Moreover, the new photoactive layer maintained its initial efficiency, even when the maximum measured thickness being in the range of 300 nm. This will help accelerate the design process, as well as the further commercialization of OSCs.

"Photoactive layers in the existing OSCs are rather thin (100 nm), and therefore it has been impossible to handle them via large-area printing process," says Professor Yang. "The new photoactive layer maintained its initial efficiency, even when the maximum measured thickness being in the range of 300 nm."

Conventional solar cells are inorganic solar cells that are made of silicon (Si) semiconductors. While these solar cells are highly efficient and stable, they are inflexible and expensive, thus challenging to produce. Therefore, in recent years, lightweight <u>organic solar cells</u> (OSCs) and <u>perovskite solar cells</u> have gained much attention as the promising candidates for next-generation solar cells.



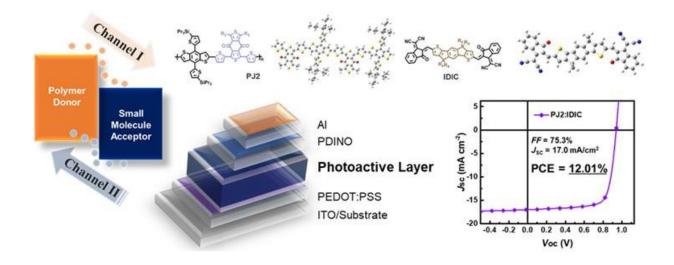

Credit: Ulsan National Institute of Science and Technology

Although OSCs do exhibit high stability and reproducibility, the efficiency level of OSCs is not nearly as high as that of the perovskite solar cells. In the study, Professor Yang has solved the issues associated with the thickness of the photoactive layers in OSCs, thereby taking a step closer to the realization of large-area printing process.

Photoactive layers used in solar cells convert solar energy into electrical energy. When these layers are exposed to sunlight, the excited electrons escape from the atom and generate free electrons and holes in a semiconductor. Here, the electrical energy is supplied by the movement of electrons and holes. The transfer of electrons is referred to as 'Channel I', while the movement of holes refers to as 'Channel II'.

"Fullerene-based solar cells utilize only 'Channel I due to inefficient light absorption in the thin active layers," says Sang Myeon Lee in the Combined M.S./Ph.D. program in the School of Energy and Chemical Engineering at UNIST, the first author of the study. "New solar cells are capable of utilizing both Channel I and Channel II, thereby realizing high



efficiency level of 12.01 percent."

"This study highlights the importance of optimizing the trade-off between charge separation/transport and domain size to achieve highperformance NF-PSCs," says Professor Yang. "We will contribute to the production and commercialization of high <u>efficiency</u> organic <u>solar cells</u> in the future."

"Our study presents a new pathway for the synthesis of non-fullerene photoactive materials," says Professor Yang. "We hope to further contribute to the production and commercialization of high-efficient OSCs cell."

More information: Shanshan Chen et al, Ultrafast Channel II process induced by a 3-D texture with enhanced acceptor order ranges for high-performance non-fullerene polymer solar cells, *Energy & Environmental Science* (2018). DOI: 10.1039/C8EE01546E

Provided by Ulsan National Institute of Science and Technology

Citation: Introducing high-performance non-fullerene organic solar cells (2018, August 31) retrieved 25 April 2024 from <u>https://phys.org/news/2018-08-high-performance-non-fullerene-solar-cells.html</u>

This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.