
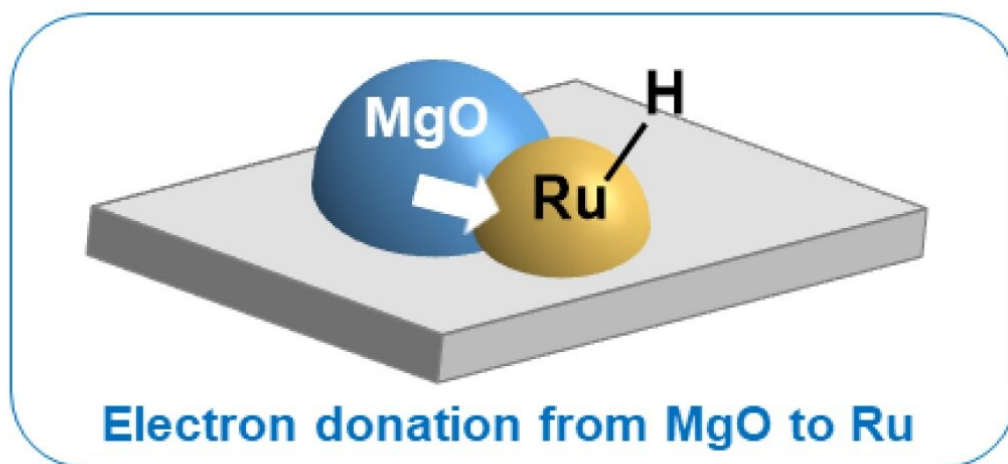


An enhanced ruthenium-based catalyst for primary amine synthesis

September 25 2020

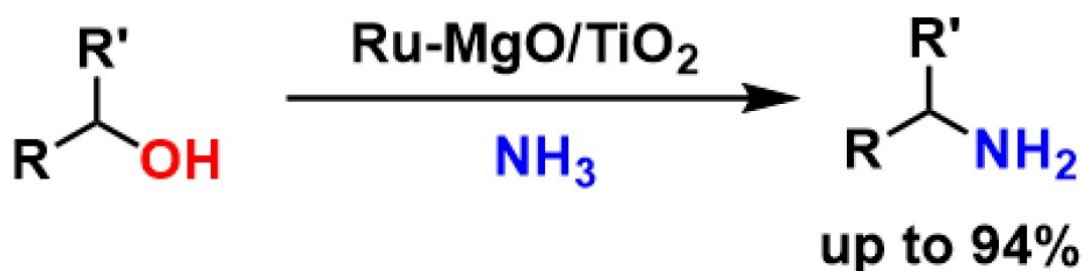

Direct amination of alcohols over Ru-MgO/TiO₂ activated by electron donation from MgO. Credit: Yusuke Kita

Researchers at Tokyo Institute of Technology (Tokyo Tech) have developed a high-performance reusable ruthenium-based catalyst for the

production of primary amines. Their method represents a major advance for the development of efficient catalysts that enable selective conversion of alcohols into primary amines under mild reaction conditions.

Primary amines are extremely versatile building blocks that are used in the preparation of many kinds of dyes, detergents, pharmaceuticals and agricultural chemicals. So far, several methods have been developed to produce primary amines using catalysts containing ruthenium, cobalt and platinum, all of which require the addition of molecular hydrogen. Synthesis of primary amines by direct substitution of alcohols with ammonia has been a longstanding challenge.

Now, researchers at Tokyo Tech report a heterogeneous ruthenium-based [catalyst](#) (Ru-MgO/TiO₂) capable of driving direct amination of alcohols to produce primary amines without having to introduce hydrogen gas. They showed that the catalyst works at low temperatures, of around 100°C. The ready availability of alcohols and low cost of ammonia make the system both cost-effective and environmentally friendly.

Compared with previous ruthenium-based systems, Ru-MgO/TiO₂ achieved higher yields (up to 94%) of the desired primary [amines](#). Reuse experiments showed that after base treatment, the catalyst could be reused three times without significant loss of activity.

Their study, published in *Chemical Science*, suggests that the MgO component of the catalyst plays an important role in enhancing reactivity through electron donation from MgO to Ru.

The researchers point out that the new catalytic system could be applied to a variety of alcohols, and could serve as a design guide for other new heterogeneous catalysts.

In addition, Ru-MgO/TiO₂ could provide an efficient synthetic route for the production of 2,5-bis(aminomethyl)furan (BAMF), an attractive compound used as a hardener for [epoxy resins](#), which are used in many types of coatings and adhesives. Using biomass-derived 2,5-bis(hydroxymethyl)furan (BHMF) as a substrate, the study showed the desired BAMF was obtained at 86% yield, outperforming previous systems.

More information: Yusuke Kita et al, Effects of ruthenium hydride species on primary amine synthesis by direct amination of alcohols over a heterogeneous Ru catalyst, *Chemical Science* (2020). [DOI: 10.1039/d0sc03858j](#)

Provided by Tokyo Institute of Technology

Citation: An enhanced ruthenium-based catalyst for primary amine synthesis (2020, September 25) retrieved 11 May 2024 from <https://phys.org/news/2020-09-ruthenium-based-catalyst-primary-amine-synthesis.html>

<p>This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.</p>
--